DVD+ReWritable
4,7 Gbytes

Basic Format Specifications

System Description
part 1, volume 2

version 1.01

September 2007

Table of contents

Section 1 - General

1 Scope

This System Description specifies the mechanical, physical and optical characteristics of 120 mm rewritable optical discs with capacities of 4,7 Gbytes and 9,4 Gbytes. It specifies the quality of the recorded and unrecorded signals, the format of the data and the recording method, thereby allowing for information interchange by means of such discs. The data can be written, read and overwritten many times using the phase change method. These discs are identified as DVD+RW HS (High Speed).

This System Description also specifies 80 mm discs with capacities of 1,46 Gbytes and 2,92 Gbytes. These discs shall have the same characteristics as the 120 mm discs, except for some parameters related to the smaller dimensions. All parameters unique for the 80 mm discs are specified in Annex A.

This System Description specifies

 – two related but different Types of this disc (see clause 7),
 – the conditions for conformance,
 – the environments in which the disc is to be tested, operated and stored,
 – the mechanical, physical and dimensional characteristics of the disc, so as to provide mechanical interchange between data processing systems,
 – the format of the information on the disc, including the physical disposition of the tracks and sectors, the error correcting codes and the coding method,
 – the characteristics of the signals recorded on the disc, thus enabling data processing systems to read the data from the disc.

This System Description provides for the interchange of discs between optical disc drives. Together with a standard for volume and file structure, it provides for full data interchange between data processing systems.

2 Conformance

2.1 Optical Disc

A claim of conformance with this System Description shall specify the Type implemented. An optical disc shall be in conformance with this System Description if it meets all mandatory requirements specified for its Type.

2.2 Generating system

A generating system shall be in conformance with this System Description if the optical disc it generates is in accordance with 2.1.

2.3 Receiving system

A receiving system shall be in conformance with this System Description if it is able to handle both Types of optical disc according to 2.1.

2.4 Compatibility statement

A claim of conformance by a Generating or Receiving system with this System Description shall include a statement listing any other standards supported. This statement shall specify the numbers of the standards, the optical disc types supported (where appropriate) and whether support includes reading only or both reading and writing.

3 References

ECMA-43: 8-bit Coded Character Set Structure and Rules (ISO/IEC 4873)

ECMA-267: 120 mm DVD – Read-Only Disc

ECMA-268: 80 mm DVD – Read-Only Disc

ECMA-287: Safety of Electronic Equipment

DVD+ReWritable: part 1, volume 1, Single Layer:
DVD+RW 4,7 Gbytes, Basic Format Specifications, Royal Philips Electronics

DVD+ReWritable, part 2, volume 1, Dual Layer:
DVD+RW 8,5 Gbytes, Basic Format Specifications, Royal Philips Electronics

DVD+ReWritable: DVD+MRW Defect Management & Physical Formatting, Royal Philips Electronics

DVD+Recordable: part 1, volume 1, Single Layer:
DVD+R 4,7 Gbytes, Basic Format Specifications, Royal Philips Electronics

DVD+Recordable: part 2, volume 1, Dual Layer:
DVD+R 8,5 Gbytes, Basic Format Specifications, Royal Philips Electronics

VCPS: Video Content Protection System for the DVD+R/+RW Video Recording Format,
System Description, Royal Philips Electronics

4 Definitions

For the purpose of this System Description the following definitions apply:

4.1 Channel bit

The elements by which the binary values ZERO and ONE are represented by marks and spaces on the disc.

4.2 Clamping Zone

The annular part of the disc within which the clamping force is applied by the clamping device.

4.3 Digital Sum Value (DSV)

The arithmetic sum obtained from a bit stream by allocating the decimal value +1 to bits set to ONE and the decimal value −1 to bits set to ZERO.

4.4 Disc Reference Plane

A plane defined by the perfectly flat annular surface of an ideal spindle onto which the clamping Zone of the disc is clamped, and which is normal to the axis of rotation.

4.5 dummy substrate

A layer which may be transparent or not, provided for the mechanical support of the disc and, in some cases, of the recording layer as well.

4.6 entrance surface

The surface of the disc onto which the optical beam first impinges.

4.7 field

A subdivision of a sector.

4.8 groove

A trench-like feature of the disc, applied before the recording of any information, and used to define the track location. The groove is located nearer to the entrance surface than the so-called land in between the grooves. The recording is made on the groove.

4.9 interleaving

The process of reallocating the physical sequence of units of data so as to render the data more immune to burst errors.

4.10   mark

A feature of the recording layer which may take the form of an amorphous domain, a pit, or any other type or form that can be sensed by the optical system. The pattern of marks and spaces represents the data on the disc.

4.11   phase change

A physical effect by which the area of a recording layer irradiated by a laser beam is heated so as to change from an amorphous state to a crystalline state and vice versa.

4.12   Physical Sector

The smallest addressable part of a track in the Information Zone of a disc that can be accessed independently of other addressable parts of the Zone.

4.13   recording layer

A layer of the disc on which data is written during manufacture and / or use.

4.14   Reed-Solomon code (RS)

An error detection and / or correction code.

4.15   Reference velocity

The Reference velocity is the linear velocity that results in the nominal Channel bit rate of 26,156 25 Mbit/s.

4.16   space

A feature of the recording layer which may take the form of an crystalline, a non-pit, or any other type or form that can be sensed by the optical system. The pattern of marks and spaces represents the data on the disc.

4.17   substrate

A transparent layer of the disc, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer.

4.18   track

A 360° turn of a continuous spiral.

4.19   track pitch

The distance between adjacent track centrelines, measured in a radial direction.

4.20   VCPS

VCPS (Video Content Protection System) defines a method to prevent unauthorized copying and/or redistribution of video data that is recorded in the DVD+R/+RW Video Format.

4.21   wobble

A continuous sinusoidal deviation of the track from the average centreline. Location information is included as phase modulated data in the wobble.

4.22   zone

An annular area of the disc.

5 Conventions and notations

5.1 Representation of numbers

A measured value may be rounded off to the least significant digit of the corresponding specified value. For instance, it implies that a specified value of 1,26 with a positive tolerance of + 0,01 and a negative tolerance of - 0,02 allows a range of measured values from 1,235 to 1,274.

Numbers in decimal notations are represented by the digits 0 to 9.

Numbers in hexadecimal notation are represented by the hexadecimal digits 0 to 9 and A to F in parentheses.

The setting of bits is denoted by ZERO and ONE.

Numbers in binary notations and bit patterns are represented by strings of digits 0 and 1, with the most significant bit shown to the left. In a pattern of n bits, bit b_{n-1} shall be the most significant bit (msb) and bit b_0 shall be the least significant bit (lsb). Bit b_{n-1} shall be recorded first.

Negative values of numbers in binary notation are given as Two's complement.

In each data field, the data is recorded so that the most significant byte (MSB), identified as Byte 0, shall be recorded first and the least significant byte (LSB) last.

In a field of $8n$ bits, bit $b_{(8n-1)}$ shall be the most significant bit (msb) and bit b_0 the least significant bit (lsb). Bit $b_{(8n-1)}$ shall be recorded first.

5.2 Names

The names of entities, e.g. specific tracks, fields, etc., are given with an initial capital.

6 List of acronyms

a.c.	alternating current	NA	Numerical Aperture
ADIP	Address in Pre-groove	NRZ	Non Return to Zero
ASM	Asymmetry	NRZI	Non Return to Zero Inverted
BP	Byte Position	NSL	Normalized Slicing Level
BPF	Band Pass Filter	OPC	Optimum Power Control
CAV	Constant Angular Velocity	OTP	Opposite Track Path
CLD	Constant Linear Density	PAA	Physical Address in ADIP
CLV	Constant Linear Velocity	PBS	Polarizing Beam Splitter
d.c.	direct current	PI	Parity of Inner-code
DCB	Disc Control Block	PLL	Phase Locked Loop
DCC	d.c. component suppression Control	PO	Parity of Outer-code
DOW	Direct OverWrite	PP	Push-Pull
DSV	Digital Sum Value	pp	peak-to-peak
ECC	Error Correction Code	PSN	Physical Sector Number
EDC	Error Detection Code	PTP	Parallel Track Path
EI	Extended Information	RIN	Relative Intensity Noise
FDCB	Formatting DCB	RPM	Revolutions per Minute
HF	High Frequency	RS	Reed-Solomon code
ID	Identification Data	RSV	Reserved
IED	ID Error Detection code		(in use by specific applications)
LPF	Low Pass filter	RUN	Recording UNit
LSB	Least Significant Byte	SNR	Signal to Noise Ratio
lsb	Least Significant Bit	SPS	Start Position Shift
LSN	Logical Sector Number	SYNC	Synchronization code
MSB	Most Significant Byte		
msb	Most Significant Bit		

7   General description of the optical disc

The optical disc that is the subject of this System Description consists of two substrates bonded together by an adhesive layer, so that the recording layer(s) is (are) on the inside. The centering of the disc is performed on the edge of the centre hole of the assembled disc on the side currently accessed. Clamping is performed in the Clamping Zone. This System Description provides for two Types of such discs.

Type S5   consists of a substrate, a single recording layer and a dummy substrate. The recording layer can be accessed from one side only. The capacity is 4,7 Gbytes for the 120 mm sized disc and 1,46 Gbytes for the 80 mm sized disc.

Type D10   consists of two substrates and two recording layers. From each side of the disc only one of the recording layers can be accessed. The capacity is 9,4 Gbytes for the 120 mm sized disc and 2,92 Gbytes for the 80 mm sized disc.

Data can be written onto the disc as marks in the form of amorphous spots in the crystalline recording layer and can be overwritten with a focused optical beam, using the phase change effect between amorphous and crystalline states. The data can be read with a focused optical beam, using the phase change effect as the difference in the reflectivity between amorphous and crystalline states. The beam accesses the recording layer through a transparent substrate of the disc.

Figure 1 shows schematically the two Types.
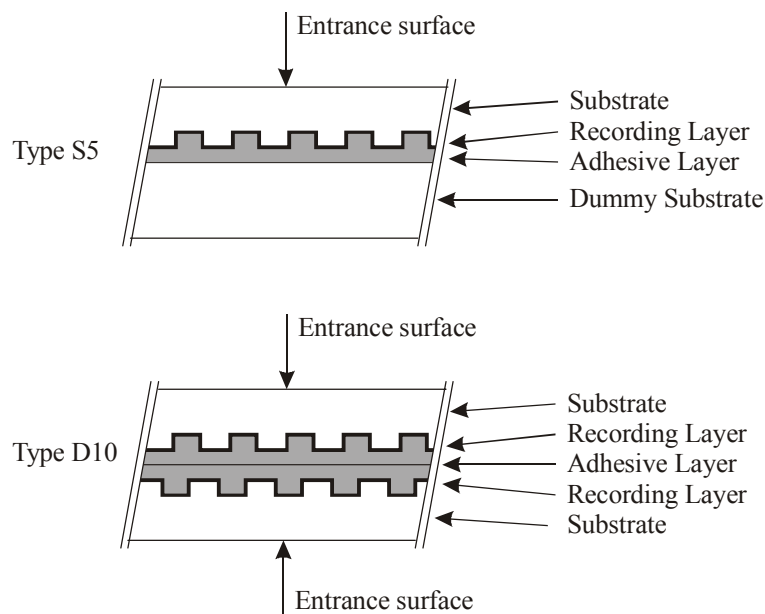
Figure 1 - Types of DVD+RW HS disc

8   General Requirements

8.1   Environments

8.1.1   Test environment

In the test environment, the air immediately surrounding the disc shall have the following properties:

temperature	: 23 °C ± 2 °C
relative humidity	: 45 % to 55 %
atmospheric pressure	: 60 kPa to 106 kPa

No condensation on the disc shall occur. Before testing, the disc shall be conditioned in this environment for 48 h minimum. It is recommended that, before testing, the entrance surface of the disc shall be cleaned according to the instructions of the manufacturer of the disc.

Unless otherwise stated, all tests and measurements shall be made in this test environment.

8.1.2   Operating environment

This System Description requires that a disc which meets all requirements of this System Description in the specified test environment shall provide data interchange over the specified ranges of environmental parameters in the operating environment.

The operating environment is the environment where the air immediately surrounding the disc shall have the following properties:

temperature	: 5 °C to 55 °C
relative humidity	: 3 % to 85 %
absolute humidity	: 1 g/m^3 to 30 g/m^3
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 10 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disc shall occur. If the disc has been exposed to conditions outside those specified in this clause, it shall be acclimatized in an allowed operating environment for at least 2 h before use.

8.1.3   Storage environment

The storage environment is defined as the environment where the air immediately surrounding the disc shall have the following properties:

temperature	: -10 °C to 55 °C
relative humidity	: 3 % to 90 %
absolute humidity	: 1 g/m^3 to 30 g/m^3
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 15 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disc shall occur.

8.1.4   Transportation

This System Description does not specify requirements for transportation; guidance is given in Annex M.

8.2   Safety requirements

The disc shall satisfy the safety requirements of Standard ECMA-287, when used in the intended manner or in any foreseeable use in an information processing system.

8.3   Flammability

The disc and its components shall be made from materials that comply with the flammability class for HB materials, or better, as specified in Standard ECMA-287.

9   Reference Drive

The Reference Drive shall be used for the measurement of optical parameters for conformance with the requirements of this System Description. The critical components of this device have the characteristics specified in this clause.

9.1   Optical system

The basic set-up of the optical system of the Reference Drive used for measuring the (over)write and read parameters is shown in Figure 2. Different components and locations of components are permitted, provided that the performance remains the same as that of the set-up in Figure 2. The optical system shall be such that the detected light reflected from the entrance surface of the disc is minimized so as not to influence the accuracy of the measurements.

The combination of polarizing beam splitter C and a quarter-wave plate D shall separate the entrance optical beam from the laser diode A and the reflected optical beam from the optical disc F. The beam splitter C shall have a p-s intensity reflectance ratio of at least 100.

A Laser diode
B Collimator lens
C Polarizing beam splitter
D Quarter-wave plate
E Objective lens

F   Optical disc
G   4 quadrant photo detector
H_1, H_2, H_3, H_4 d.c. coupled amplifiers
I_a, I_b, I_c, I_d Output currents from photo detector G
I_1, I_2 Summed output currents of H_3, H_4
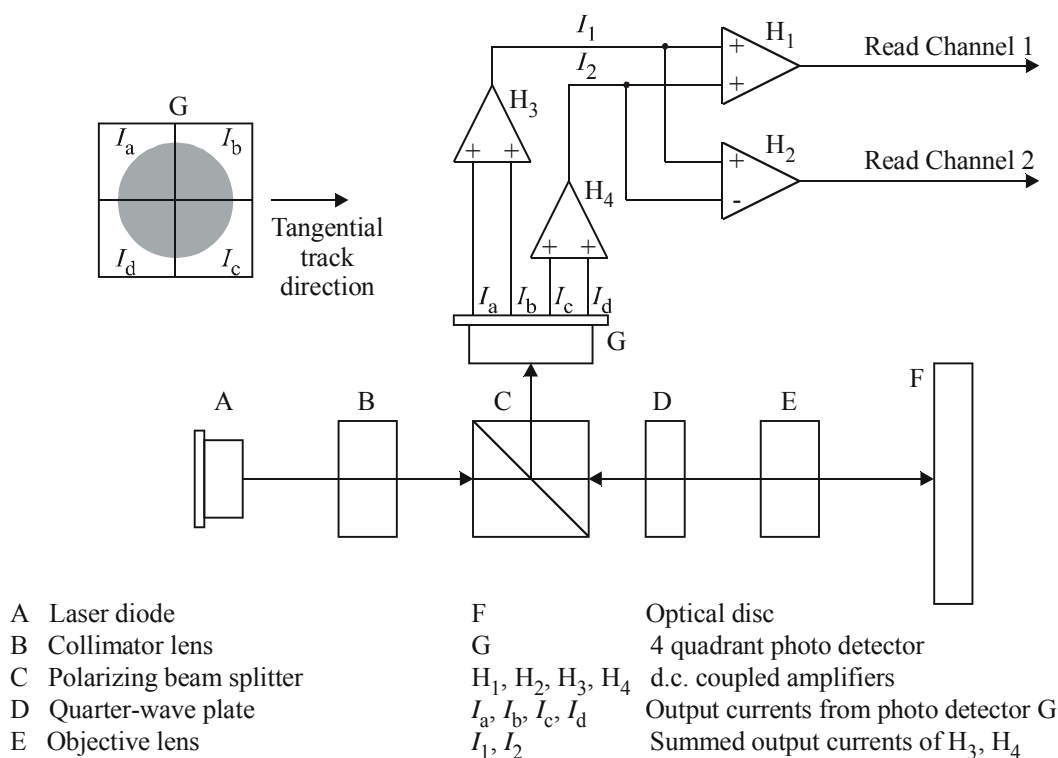
Figure 2 - Optical system of the Reference Drive

9.2   Optical beam

The focused optical beam used for writing and reading data shall have the following properties:

a) Wavelength (λ) $655 \text{ nm}^{+ 10 \text{ nm}}_{- 5 \text{ nm}}$

b) Numerical aperture of the objective lens (NA) $0,65 \pm 0,01$

c) The objective lens shall be compensated for spherical aberrations caused by a parallel substrate with nominal thickness (0,6 mm) and nominal refractive index (1,55).

d) Wave front aberration $0,033 \times \lambda$ rms max.

e) Light intensity at the rim of the pupil of the   35 % to 50 % of the maximum intensity
    objective lens   in the radial direction and 45 % to 60 %
                                                          in the tangential direction.

f) Polarization of the light   Circular

g) Read power (average)   0,7 mW $\pm$ 0,1 mW
                                                          (d.c. or HF modulated with a frequency >400 MHz)

h) Write power and pulse width   see Annex G

i) Relative Intensity Noise (RIN)* of the laser diode -134 dB/Hz max.

    *RIN (dB/Hz) = 10 log [(a.c. light power density / Hz) / d.c. light power]

9.3 Read channel 1

Read channel 1 shall be provided to generate signals from the marks and spaces in the recording layer. This Read channel shall be used for reading the user-written information, using the change in reflectivity of the marks and spaces due to the phase change effect. The read amplifiers after the photo detectors in the Read channel shall have a flat response within 1 dB from d.c. to 20 MHz.

For measurement of jitter, the characteristics of the PLL and the slicer, etc. are specified in Annex E.

9.4 Disc clamping

For measuring, the disc shall be clamped between two concentric rings covering most of the Clamping Zone (see 10.5). The top clamping area shall have the same diameters as the bottom clamping area (Figure 3). Clamping shall occur between

$$d_{in} = 22,3 \, mm \, {}^{+0,5 \, mm}_{-0,0 \, mm}$$

and

$$d_{out} = 32,7 \, mm \, {}^{+0,0 \, mm}_{-0,5 \, mm}$$

The total clamping force shall be F_1 = 2,0 N ± 0,5 N. In order to prevent warping of the disc under the moment of force generated by the clamping force and the chucking force F_2 exerted on the rim of the centre hole of the disc, F_2 shall not exceed 0,5 N (see Figure 3).
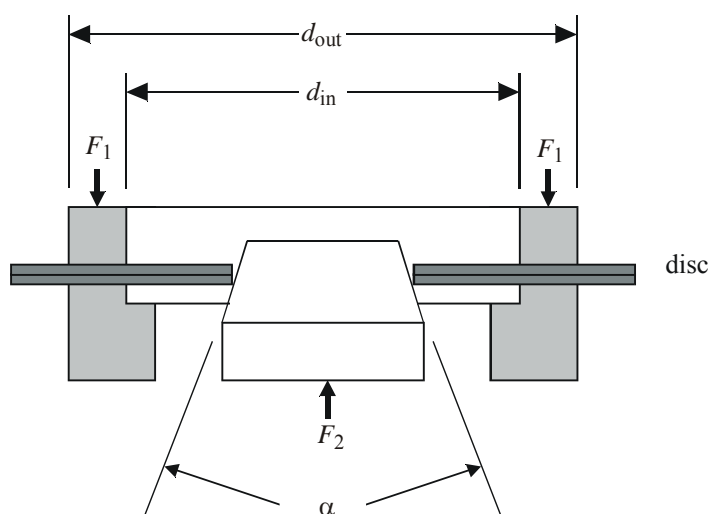
Figure 3 - Clamping and chucking conditions

The tapered cone angle, α, shall be 40,0° ± 0,5°.

9.5 Rotation of the disc

The actual rotation speed for reading the disc shall be such that it results in the Reference velocity of 3,49 m/s ± 0,03 m/s at the nominal Channel bit rate of 26,156 25 Mbit/s. The direction of rotation shall be counter-clockwise when viewed from the objective lens.

The actual rotation speed (v_{actual}) for writing the disc shall be such that it includes all velocities for which parameters are specified in the Physical format information in the ADIP Aux Frames in the Lead-in Zone of the disc (see 14.4.1.1 and 14.4.2).

Note: the rotational speed of the disc is depending on the radial position: $\text{angular velocity} = 60 \times \dfrac{v_{actual}}{2\pi \times r} \, RPM$

When testing the disc the actual speed is limited such that the angular velocity does not exceed 10 000 RPM.

9.6   Wobble channel (Read channel 2)

Read channel 2 of the drive provides the wobble signals to control the access to addressed locations on the disc during writing. The wobble signal is generated in Read Channel 2 as a signal (I_1 - I_2) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. The read amplifiers after the photo detectors in the Read channel shall have a flat response within 1 dB from d.c. to 20 MHz.

9.7   Tracking channel (Read channel 2)

Read channel 2 of the drive provides the tracking error signals to control the servos for radial tracking of the optical beam. The radial tracking error is generated in Read Channel 2 as a signal (I_1 - I_2) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens.

The method of generating the axial tracking error is not specified for the Reference Drive.

9.8   Reference servo systems

9.8.1   Normalized servo transfer function

The open-loop transfer function, $H_s(i\omega)$ for the axial and radial tracking servos is given by equation (1),

$$H_s(i\omega) = \frac{1}{3} \times \left(\frac{\omega_0}{i\omega}\right)^2 \times \frac{1 + \dfrac{3i\omega}{\omega_0}}{1 + \dfrac{i\omega}{3\omega_0}} \tag{1}$$

where

$$i = \sqrt{-1}$$

$$\omega = 2\pi f$$

$$\omega_0 = 2\pi f_0$$

and f_0 is the 0 dB crossover frequency of the open-loop transfer function.
The crossover frequencies of the lead-lag network of the servo are

lead break frequency: $f_1 = f_0 / 3$

lag break frequency: $f_2 = f_0 \times 3$

Another frequency of importance is the frequency f_X at which a sinusoidal displacement with an amplitude equal to the maximum allowed residual tracking error e_{max}, corresponds to the maximum expected acceleration α_{max}. This frequency can be calculated as follows:

$$f_X = \frac{1}{2\pi}\sqrt{\frac{\alpha_{max}}{e_{max}}}$$

Because the tracking error signals from the disc can have rather large variations, the tracking error signal fed into each reference servo loop shall be adjusted to a fixed level (effectively calibrating the total loop gain), such to guarantee the specified bandwidth.

9.8.2   **Reference Servo for Axial Tracking**

The crossover frequency of the normalized servo transfer function (H_s) for axial tracking, $f_0 = \omega_0 / (2\pi)$ shall be given by equation (2), where α_{max} is the maximum expected axial acceleration of 8,0 m/s^2, which is multiplied by a factor m = 1,5 for servo margin. The tracking error e_{max}, caused by this m×α_{max}, shall be 0,20 μm.

Thus the crossover frequency f_0 shall be given by

$$f_0 = \frac{1}{2\pi}\sqrt{\frac{3 \times m \times \alpha_{max}}{e_{max}}} = \frac{1}{2\pi}\sqrt{\frac{3 \times 1,5 \times 8}{0,20 \times 10^{-6}}} = 2,1 \text{ kHz} \tag{2}$$

For an open loop transfer function H of the Reference Servo for axial tracking, $|1+H|$ is limited as schematically shown by the shaded region of Figure 4.

Bandwidth from 100 Hz to 10 kHz

$|1+H|$ shall be within 20% of $|1+H_s|$.

Bandwidth from 26 Hz to 100 Hz

| 1+H | shall be within the limits enclosed by the following four points.

1) 41,7 dB at 100 Hz   ($|1+H_s|$ at 100 Hz - 20%)

2) 45,2 dB at 100 Hz   ($|1+H_s|$ at 100 Hz + 20%)

3) 65,1 dB at 26 Hz   ($|1+H_s|$ at 26 Hz - 20%)

4) 85,1 dB at 26 Hz   ($|1+H_s|$ at 26 Hz - 20% + 20 dB)

Bandwidth from 9,5 Hz to 26 Hz

$|1+H|$ shall be between 65,1 dB and 85,1 dB.
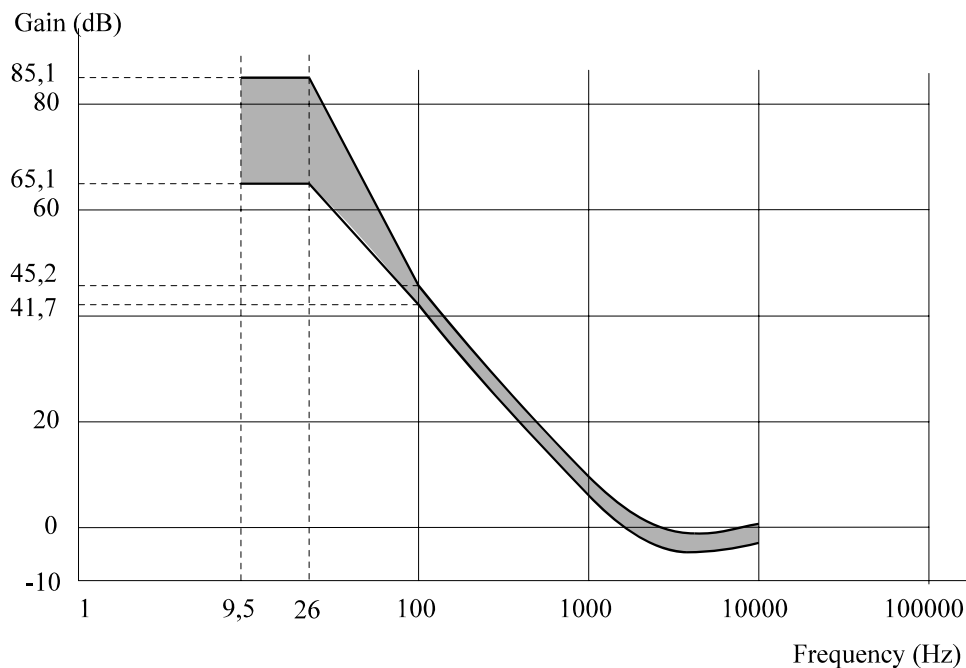
Figure 4 - Reference servo for axial tracking

9.8.3 **Reference Servo for Radial Tracking**

The crossover frequency of the normalized servo transfer function (H_s) for radial tracking, $f_0 = \omega_0 / (2\pi)$ shall be given by equation (3), where α_{max} is the maximum expected radial acceleration of 1,1 m/s², which is multiplied by a factor m = 1,5 for servo margin. The tracking error e_{max}, caused by this m×α_{max}, shall be 0,022 µm.

Thus the crossover frequency f_0 shall be given by

$$f_0 = \frac{1}{2\pi} \sqrt{\frac{3 \times m \times \alpha_{max}}{e_{max}}} = \frac{1}{2\pi} \sqrt{\frac{3 \times 1,5 \times 1,1}{0,022 \times 10^{-6}}} = 2,4 \text{ kHz} \tag{3}$$

For an open loop transfer function H of the Reference Servo for radial tracking, $|1+H|$ is limited as schematically shown by the shaded region of Figure 5.

Bandwidth from 100 Hz to 10 kHz

$|1+H|$ shall be within 20% of $|1+H_s|$.

Bandwidth from 28,2 Hz to 100 Hz

$|1+H|$ shall be within the limits enclosed by the following four points.

1) 43,7 dB at 100 Hz   ($|1+H_s|$ at 100 Hz - 20%)

2) 47,2 dB at 100 Hz   ($|1+H_s|$ at 100 Hz + 20%)

3) 65,6 dB at 28,2 Hz   ($|1+H_s|$ at 28,2 Hz - 20%)

4) 85,6 dB at 28,2 Hz   ($|1+H_s|$ at 28,2 Hz - 20% + 20 dB)

Bandwidth from 9,5 Hz to 28,2 Hz

$|1+H|$ shall be between 65,6 dB and 85,6 dB.
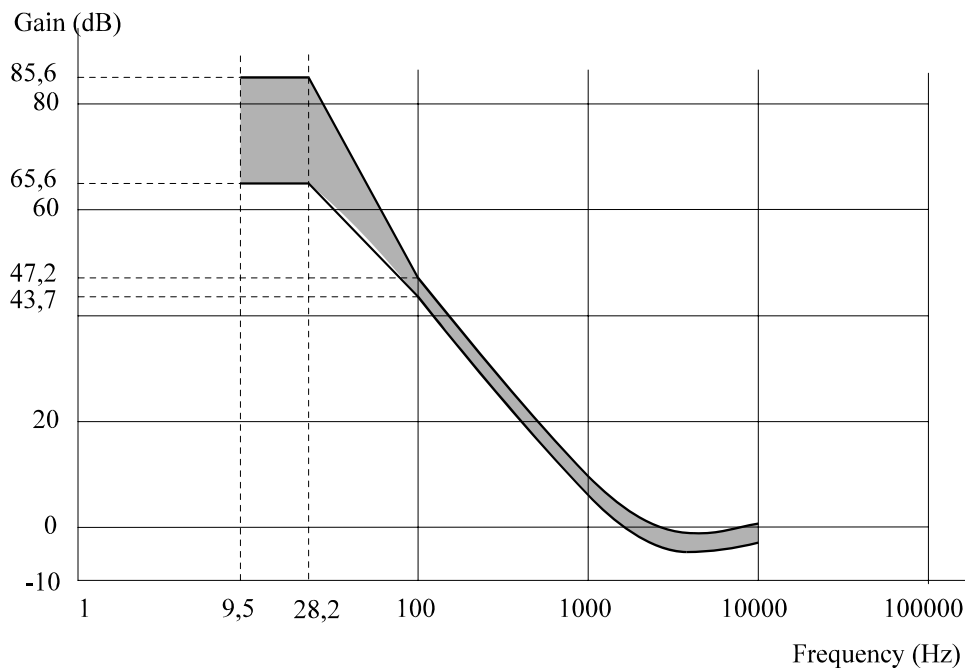
Figure 5 - Reference servo for radial tracking

This page is intentionally left blank

Section 2 - Dimensional, mechanical and physical characteristics of the disc

10   Dimensional characteristics

Dimensional characteristics are specified for those parameters deemed mandatory for interchange and compatible use of the disc. Where there is freedom of design, only the functional characteristics of the elements described are indicated. The enclosed drawing, Figure 6 shows the dimensional requirements in summarized form. The different parts of the disc are described from the centre hole to the outside rim.

View A - Transition areas and Clamping zone

View B - Rim area
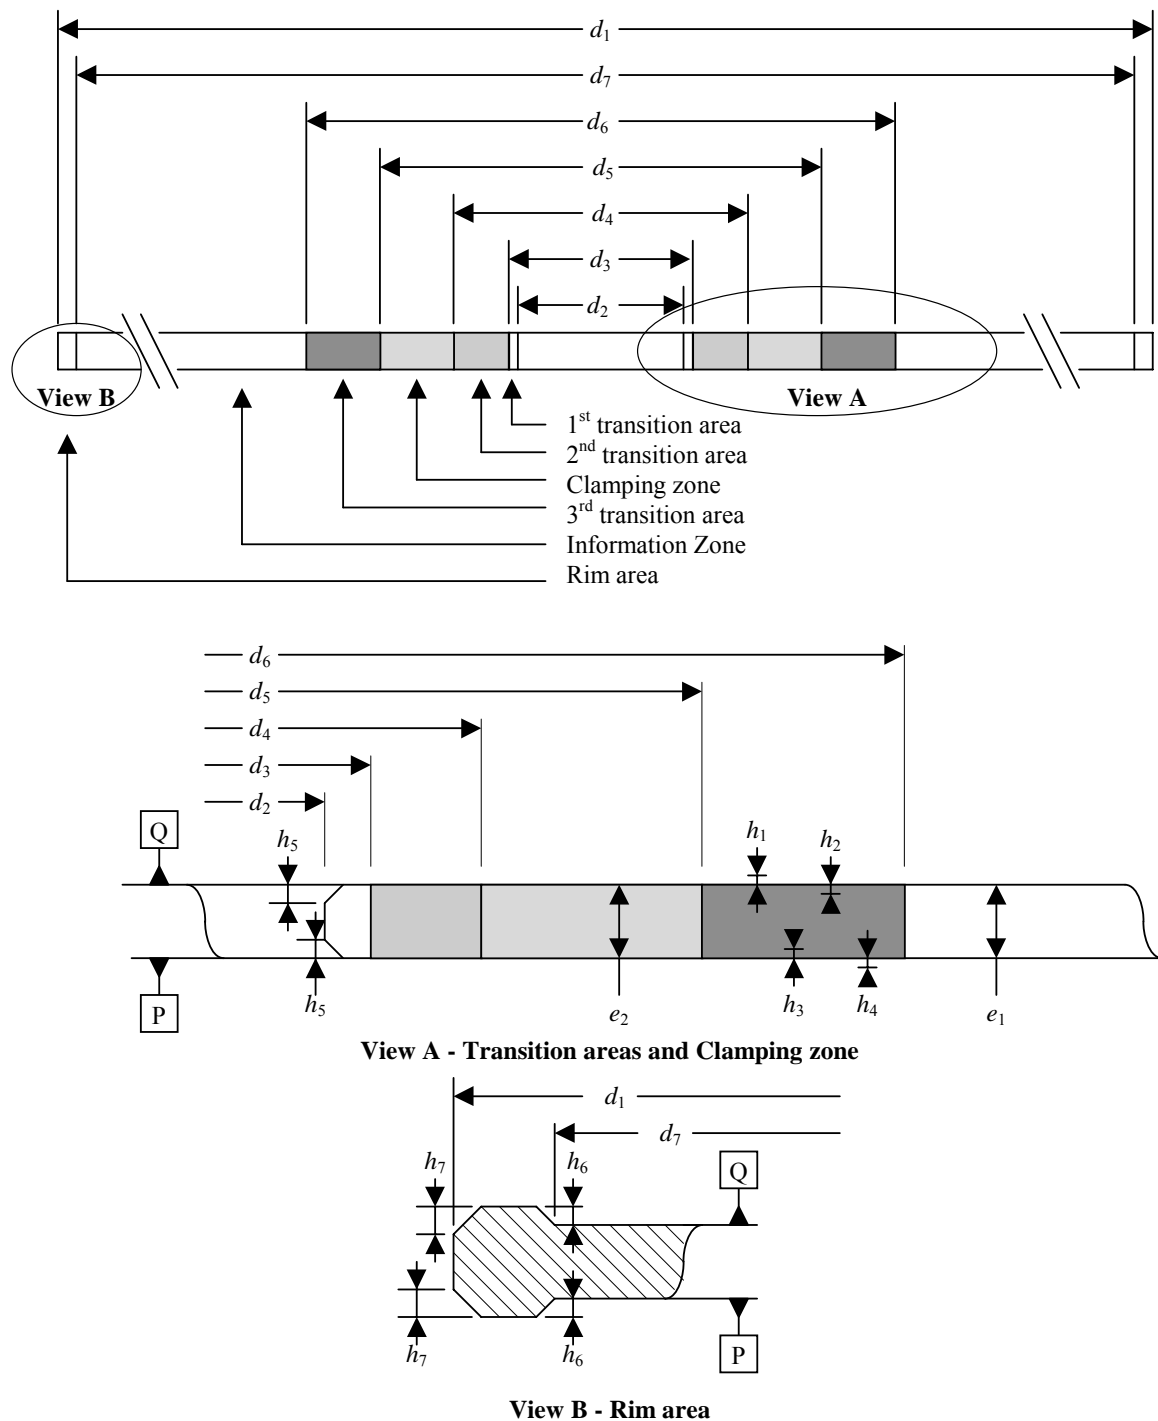
Figure 6 - Physical disc dimensions

10.1 Reference Planes

The dimensions are referred to two Reference Planes P and Q.

Reference Plane P is the primary Reference Plane. It is the plane on which the bottom surface of the Clamping Zone rests (see 10.5).

Reference Plane Q is the plane parallel to Reference Plane P at the height of the top surface of the Clamping Zone (see Figure 6).

10.2 Overall dimensions

The disc shall have an overall diameter (for 80 mm disc see Annex A)

$$d_1 = 120,00 \text{ mm} \pm 0,30 \text{ mm}$$

The centre hole of a substrate or a dummy substrate shall have a diameter (see Figure 7)

$$d_{\text{substrate}} = 15,00 \text{ mm}^{+0,15\text{mm}}_{-0,00\text{mm}}$$

The hole of an assembled disc, i.e. with both parts bonded together, shall have a diameter

$$d_2 = 15,00 \text{ mm min.}$$
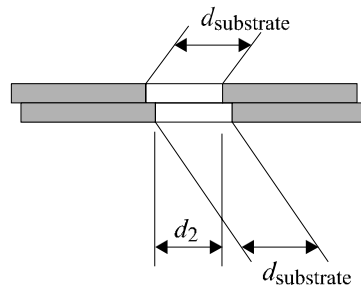
Figure 7 - Hole diameters for an assembled disc

The corners of the centre hole shall be free of any burrs or sharp features and shall be rounded off or chamfered by

$$h_5 = 0,1 \text{ mm max.}$$

The thickness of the disc shall be

$$e_1 = 1,20 \text{ mm}^{+0,30\text{mm}}_{-0,06\text{mm}}$$

10.3 First transition area

In the area defined by d_2 and

$$d_3 = 16,0 \text{ mm min.}$$

the surface of the disc is permitted to be above Reference Plane P and/or below Reference Plane Q by 0,10 mm max.

10.4 Second transition area

This area shall extend between diameter d_3 and diameter

$$d_4 = 22,0 \text{ mm max.}$$

In this area the disc may have an uneven surface or burrs up to 0,05 mm max. beyond Reference Planes P and/or Q.

10.5 **Clamping Zone**

This Zone shall extend between diameter d_4 and diameter

d_5 = 33,0 mm min.

Each side of the Clamping Zone shall be flat within 0,1 mm. The top side of the Clamping Zone, i.e. that of Reference Plane Q shall be parallel to the bottom side, i.e. that of Reference Plane P within 0,1 mm.

In the Clamping Zone the thickness e_2 of the disc shall be

$$e_2 = 1,20\,\text{mm}\,{}^{+0,20\,\text{mm}}_{-0,10\,\text{mm}}$$

10.6 **Third transition area**

This area shall extend between diameter d_5 and diameter

d_6 = 44,0 mm max.

In this area the top surface is permitted to be above Reference Plane Q by

h_1 = 0,25 mm max.

or below Reference Plane Q by

h_2 = 0,10 mm max.

The bottom surface is permitted to be above Reference Plane P by

h_3 = 0,10 mm max.

or below Reference Plane P by

h_4 = 0,25 mm max.

10.7 **Information Zone**

The Information Zone shall extend from diameter d_6 to diameter

d_7 = 117,5 mm min (for 80 mm disc see Annex A).

This Zone consists of the Lead-in Zone, the Data Zone, and the Lead-out Zone.

10.8 **Rim area**

The rim area is that area extending from diameter d_7 to diameter d_1. In this area the surfaces are permitted to both extend beyond Reference Plane Q or Reference Plane P

h_6 = 0,1 mm max.

The outer corners of the disc shall be free of any burrs or sharp features and shall be rounded off or chamfered by

h_7 = 0,2 mm max.

10.9 **Remark on tolerances**

All heights specified in the preceding clauses and indicated by h_i are independent from each other. This means that, for example, if the top surface of the third transition area is below Reference Plane Q by up to h_2, there is no implication that the bottom surface of this area has to be above Reference Plane P by up to h_3. Where dimensions have the same - generally maximum - numerical value, this does not imply that the actual values have to be identical.

11 Mechanical characteristics

11.1 Mass

The mass of the disc shall be in the range of 13,0 g to 20,0 g (for 80 mm disc see Annex A).

11.2 Moment of inertia

The moment of inertia of the disc, relative to its rotation axis, shall not exceed 0,040 g·m^2 (for 80 mm disc see Annex A).

11.3 Dynamic imbalance

The dynamic imbalance of the disc, relative to its rotation axis, shall not exceed 2,5 g·mm (for 80 mm disc see Annex A).

11.4 Axial runout

When measured by the optical system with the Reference Servo for axial tracking, the disc rotating at the Reference velocity of 3,49 m/s (see 9.5), the deviation of the recording layer from its nominal position in the direction normal to the Reference Planes shall not exceed 0,30 mm.

Some explanation about the use of the Reference Servo as a measurement tool and the way to translate the measurement results to a practical implementation for a high-speed servo is given in Annex K.

11.4.1 Tracking requirements at the Reference velocity (CLV)

The residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for axial tracking and the disc rotating at the Reference velocity, shall not exceed 0,13 μm (displacement of the objective lens needed to move the focal point of the optical beam onto the recording layer).

The measuring filter shall be a Butterworth LPF, f_c (-3 dB): 10 kHz, with slope : -80 dB/decade.

11.4.2 Tracking requirements at 3 000 RPM (CAV)

The residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for axial tracking and the disc rotating at a fixed rotational speed of 3000 RPM, shall not exceed $E_{ax}(r)$ μm, where E_{ax} is a function of the radius r according to the following specifications:

for r ≤ 29 mm: $E_{ax}(r) = 0,20$ μm

for r ≥ 29 mm: $E_{ax}(r) = \left(\dfrac{r}{29}\right)^2 \times 0,20 \,\mu m$ with r expressed in mm.

If present, the 50 Hz component shall be removed from the residual tracking error before applying these requirements (e.g. by software processing of the sampled measurement data).

11.5 Radial runout

The runout of the outer edge of the disc shall not exceed 0,30 mm peak-to-peak.

The radial runout of tracks shall not exceed 70 μm peak-to-peak.

Some explanation about the use of the Reference Servo as a measurement tool and the way to translate the measurement results to a practical implementation for a high-speed servo is given in Annex K.

11.5.1 Tracking requirements at the Reference velocity (CLV)

The residual tracking error below 1,1 kHz (= f_X as defined in 9.8.1), measured on the blank disc using the Reference Servo for radial tracking and the disc rotating at the Reference velocity of 3,49 m/s (see 9.5), shall not exceed 0,015 μm.

The measuring filter shall be a Butterworth LPF, f_c (-3 dB) : 1,1 kHz, with slope : -80 dB/decade.

The rms noise value of the residual error signal in the frequency band from 1,1 kHz to 10 kHz, measured with an integration time of 20 ms, using the Reference Servo for radial tracking, shall not exceed 0,016 μm.
The measuring filter shall be a Butterworth BPF,

> frequency range (-3 dB)   : 1,1 kHz, with slope : +80 dB/decade
>   to : 10 kHz, with slope : -80 dB/decade.

11.5.2 Tracking requirements at 3 000 RPM (CAV)

The residual tracking error below 10 kHz, measured on the blank disc using the Reference Servo for radial tracking and the disc rotating at a fixed rotational speed of 3000 RPM, shall not exceed E_{rad} (r) μm, where E_{rad} is a function of the radius r according to the following specifications:

for r ≤ 29 mm: E_{rad} (r) = 0,025 μm

for r ≥ 29 mm: $E_{rad}(r) = \left(\dfrac{r}{29}\right)^2 \times 0,025$ μm   with r expressed in mm.

If present, the 50 Hz component shall be removed from the residual tracking error before applying these requirements (e.g. by software processing of the sampled measurement data). This process effectively removes the influence of the pure eccentricity of the disc.

12 Optical characteristics in the Information Zone

12.1 Index of refraction

The index of refraction of the substrate in the Information Zone shall be $1,55 \pm 0,10$.

12.2 Thickness of the substrate

The thickness of the substrate, from the entrance surface to the recording layer, varies with the index of refraction of the substrate and shall be defined as the enclosed region in Figure 8.
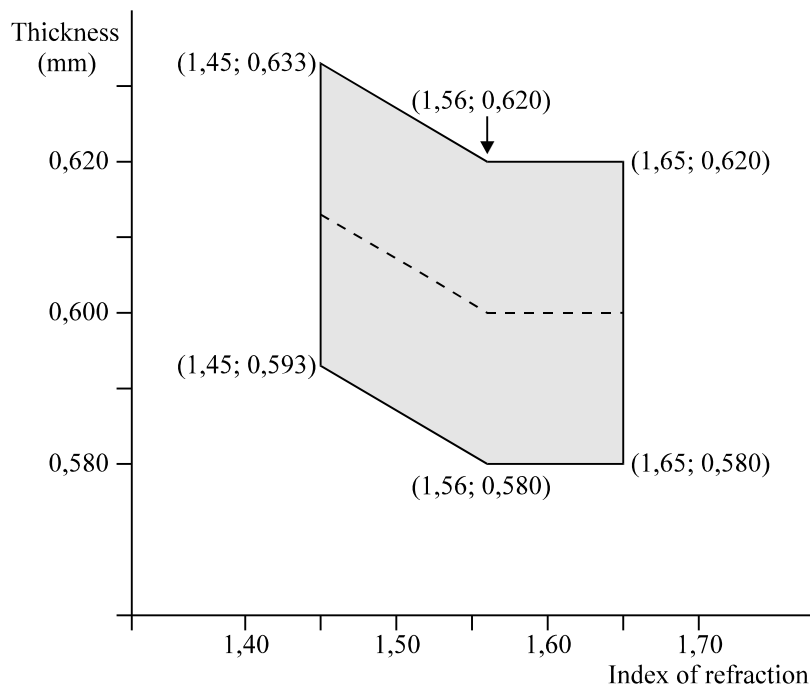
Figure 8 - Thickness of the substrate

12.3 Reflectivity

The double-pass optical transmission of the substrate and the reflectivity of the recording layer are measured together as the reflectance R of the disc. When measured according to Annex C the value of R shall be

in the Information Zone $18\% \leq R_d \leq 30\%$ in the unrecorded groove

$$18\% \leq R_{14H} \leq 30\% \text{ in the recorded groove}$$

12.4 Birefringence

The birefringence of the substrate shall not exceed 60 nm when measured according to Annex D.

12.5 Angular deviation

The angular deviation is the angle α between a parallel incident beam perpendicular to the Reference Plane P and the reflected beam (see Figure 9). The incident beam shall have a diameter in the range 0,30 mm to 3,0 mm. This angle α includes deflection due to the entrance surface and to the unparallelism of the recording layer with the entrance surface.
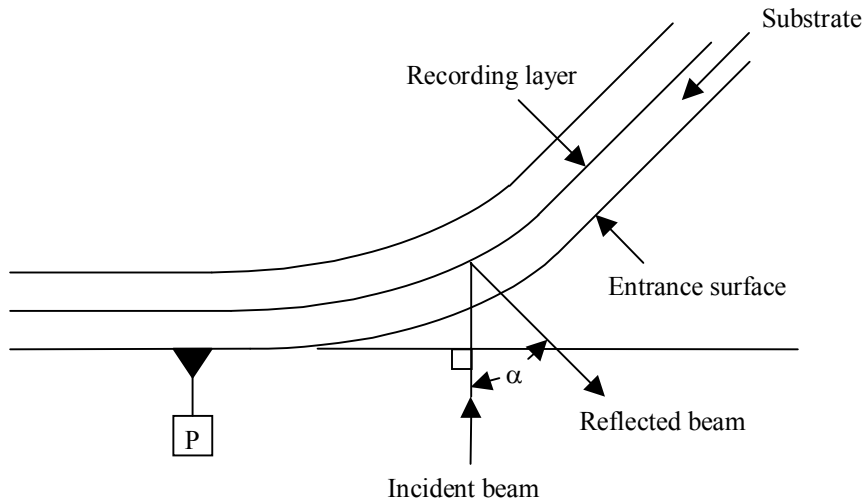
Figure 9 - Angular deviation α

The angular deviation shall be

In radial direction : $|\alpha| = 0{,}70°$ max .

The variation of α in radial direction over one revolution shall be 0,80° peak-to-peak max.

In tangential direction : $|\alpha| = 0{,}30°$ max.

This page is intentionally left blank

Section 3 - Format of information

13 Data format

The data received from the host, called Main Data, is formatted in a number of steps before being recorded on the disc.

It is transformed successively into

− a Data Frame,

− a Scrambled Frame,

− an ECC Block,

− 16 Recording Frames,

− 16 Physical Sectors,

− a Recording Unit.

These steps are specified in the following clauses.

13.1 Data Frames

A Data Frame shall consist of 2 064 bytes arranged in an array of 12 rows each containing 172 bytes (Figure 10). The first row shall start with three fields, called Identification Data (ID), ID Error Detection Code (IED), and RSV bytes, followed by 160 Main Data bytes. The next 10 rows shall each contain 172 Main Data bytes, and the last row shall contain 168 Main Data bytes followed by four bytes for recording an Error Detection Code (EDC). The 2 048 Main Data bytes are identified as D_0 to $D_{2\ 047}$.
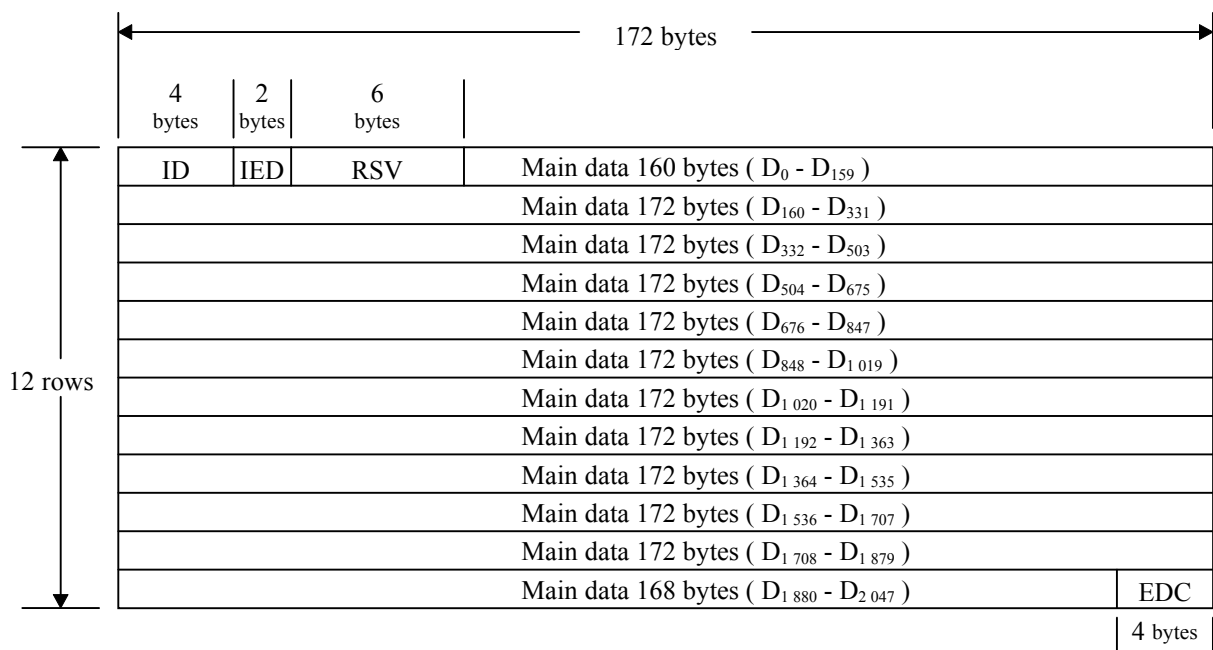
Figure 10 - Data Frame

13.1.1 Identification Data (ID)

This field shall consist of four bytes, the bits of which are numbered consecutively from b_0 (lsb) to b_{31} (msb), see Figure 11.
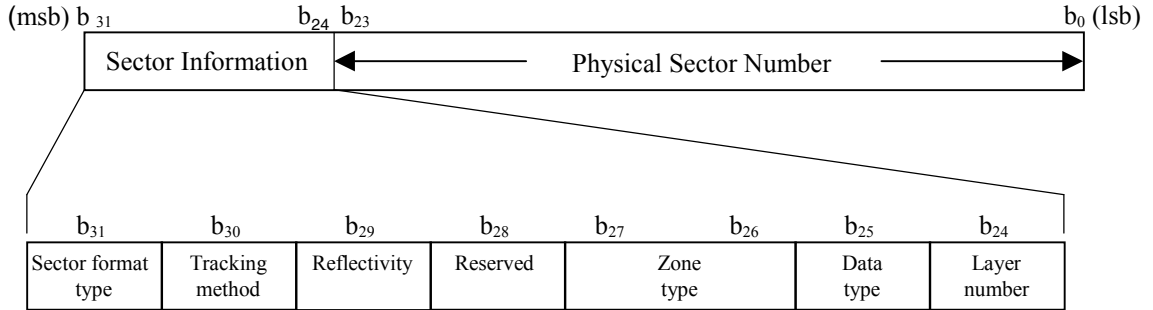
Figure 11 - Identification Data (ID)

The bits of the most significant byte, the Sector Information, shall be set as follows:

Bit b_{31}	shall be set to ZERO, indicating a CLD format
Bit b_{30}	shall be set to ONE, indicating groove tracking (see clause 14)
Bit b_{29}	shall be set to ONE indicating that the reflectance is less than 40 %
Bit b_{28}	shall be set to ZERO
Bits b_{27} to b_{26}	shall be set to ZERO ZERO in the Data Zone ZERO ONE in the Lead-in Zone ONE ZERO in the Lead-out Zone
Bit b_{25}	shall be set to ONE, indicating Rewritable data.
Bit b_{24}	shall be set to ZERO, indicating that through an entrance surface only one recording layer can be accessed

The least significant three bytes, bits b_{23} to b_0 , shall specify the Physical Sector Number in binary notation. The Physical Sector Number of the first Physical Sector of an ECC Block shall be an integer multiple of 16.

13.1.2 ID Error Detection Code (IED)

When identifying all bytes of the array shown in Figure 10 as $C_{i,j}$ for i = 0 to 11 and j = 0 to 171, the bytes of IED are represented by $C_{0,j}$ for j = 4 to 5. Their setting is obtained as follows.

$$\text{IED}(x) = \sum_{j=4}^{5} C_{0,j} x^{5-j} = I(x)\, x^2 \bmod GE(x)$$

where

$$I(x) = \sum_{j=0}^{3} C_{0,j} x^{3-j} \quad \text{and} \quad G_E(x) = (x+1)(x+\alpha)$$

α is the primitive root of the primitive polynomial $P(x) = x^8 + x^4 + x^3 + x^2 + 1$

13.1.3 RSV

This field shall consist of 6 bytes. The first byte may be set by the application. If not specified by the application, it is reserved and shall be set to (00). The remaining 5 bytes are reserved and shall all be set to (00). Under no circumstance may other data received from the host be recorded in this field.

Circumvention*: Recorders and recording drives shall be considered as circumvention devices when these are produced to record, or can easily be modified to record, in any manner, a user-defined number in this field.*

13.1.4 Error Detection Code (EDC)

This 4-byte field shall contain the parities of an Error Detection Code computed over the preceding 2 060 bytes of the Data Frame. Considering the Data Frame as a single bit field starting with the most significant bit of the first byte of the ID field and ending with the least significant bit of the EDC field, then this msb will be $b_{16\,511}$ and the lsb will be b_0. Each bit b_i of the EDC is shown as follows for $i = 0$ to 31:

$$EDC(x) = \sum_{i=0}^{31} b_i x^i = I(x) \bmod G(x)$$

where

$$I(x) = \sum_{i=32}^{16\,511} b_i x^i \quad \text{and} \quad G(x) = x^{32} + x^{31} + x^4 + 1$$

13.2 Scrambled Frames

The 2 048 Main Data bytes shall be scrambled by means of the circuit shown in Figure 12 which shall consist of a feedback bit shift register in which bits r_7 (msb) to r_0 (lsb) represent a scrambling byte at each 8-bit shift.
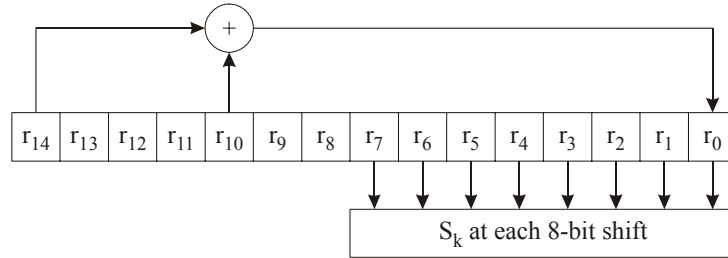
Figure 12 - Feedback shift register

At the beginning of the scrambling procedure of a Data Frame, positions r_{14} to r_0 shall be pre-set to the value(s) specified in Table 1 (the msb of the pre-set value shall be discarded). The same pre-set value shall be used for 16 consecutive Data Frames. After 16 groups of 16 Data Frames, the sequence is repeated. The initial pre-set number is equal to the value represented by bits b_7 (msb) to b_4 (lsb) of the ID field of the Data Frame. Table 1 specifies the initial pre-set value of the shift register corresponding to the 16 initial pre-set numbers.

Table 1 - Initial values of the shift register

Initial pre-set number	Initial pre-set value	Initial pre-set number	Initial pre-set value
(0)	(0001)	(8)	(0010)
(1)	(5500)	(9)	(5000)
(2)	(0002)	(A)	(0020)
(3)	(2A00)	(B)	(2001)
(4)	(0004)	(C)	(0040)
(5)	(5400)	(D)	(4002)
(6)	(0008)	(E)	(0080)
(7)	(2800)	(F)	(0005)

The part of the initial value of r_7 to r_0 is taken out as scrambling byte S_0. After that, an 8-bit shift is repeated 2 047 times and the following 2 047 bytes shall be taken from r_7 to r_0 as scrambling bytes S_1 to $S_{2\,047}$. The Main Data bytes D_k of the Data Frame become scrambled bytes D'_k where

$$D'_k = D_k \oplus S_k \quad \text{for } k = 0 \text{ to } 2\,047 \qquad (\oplus \text{ stands for Exclusive OR})$$

13.3 ECC Blocks

An ECC Block is formed by arranging 16 consecutive Scrambled Frames in an array of 192 rows of 172 bytes each (Figure 13). To each of the 172 columns 16 bytes of Parity of Outer Code are added, then, to each of the resulting 208 rows, 10 bytes of Parity of Inner Code are added. Thus a complete ECC Block comprises 208 rows of 182 bytes each. The bytes of this array are identified as $B_{i,j}$ as follows, where i is the row number and j is the column number.

$B_{i,j}$ for $i = 0$ to 191 and $j = 0$ to 171 are bytes from the Scrambled Frames

$B_{i,j}$ for $i = 192$ to 207 and $j = 0$ to 171 are bytes of the Parity of Outer Code

$B_{i,j}$ for $i = 0$ to 207 and $j = 172$ to 181 are bytes of the Parity of Inner Code

Figure 13 - ECC Block

The PO and PI bytes shall be obtained as follows.

In each of columns $j = 0$ to 171, the 16 PO bytes are defined by the remainder polynomial $R_j(x)$ to form the outer code RS (208,192,17).

$$R_j(x) = \sum_{i=192}^{207} B_{i,j} x^{207-i} = I_j(x) x^{16} \bmod G_{PO}(x)$$

where $\quad I_j(x) = \sum_{i=0}^{191} B_{i,j} x^{191-i} \quad$ and $\quad G_{PO}(x) = \prod_{k=0}^{15} (x + \alpha^k)$

In each of rows $i = 0$ to 207, the 10 PI bytes are defined by the remainder polynomial $R_i(x)$ to form the inner code RS(182,172,11).

$$R_i(x) = \sum_{j=172}^{181} B_{i,j} x^{181-j} = I_i(x) x^{10} \bmod G_{PI}(x)$$

where $\quad I_i(x) = \sum_{j=0}^{171} B_{i,j} x^{171-j} \quad$ and $\quad G_{PI}(x) = \prod_{k=0}^{9} (x + \alpha^k)$

α is the primitive root of the primitive polynomial $P(x) = x^8 + x^4 + x^3 + x^2 + 1$

13.4 Recording Frames

Sixteen Recording Frames shall be obtained by interleaving one of the 16 PO rows at a time after every 12 rows of an ECC Block (Figure 14). This is achieved by re-locating the bytes $B_{i,j}$ of the ECC Block as $B_{m,n}$ for

$$m = i + \text{int}\,[i\,/\,12] \quad \text{and} \quad n = j \quad \text{for } i \le 191$$

$$m = 13 \times (i - 191) - 1 \quad \text{and} \quad n = j \quad \text{for } i \ge 192$$

where int $[x]$ represents the largest integer not greater than x.

Thus the 37 856 bytes of an ECC Block are re-arranged into 16 Recording Frames of 2 366 bytes. Each Recording Frame consists of an array of 13 rows of 182 bytes.
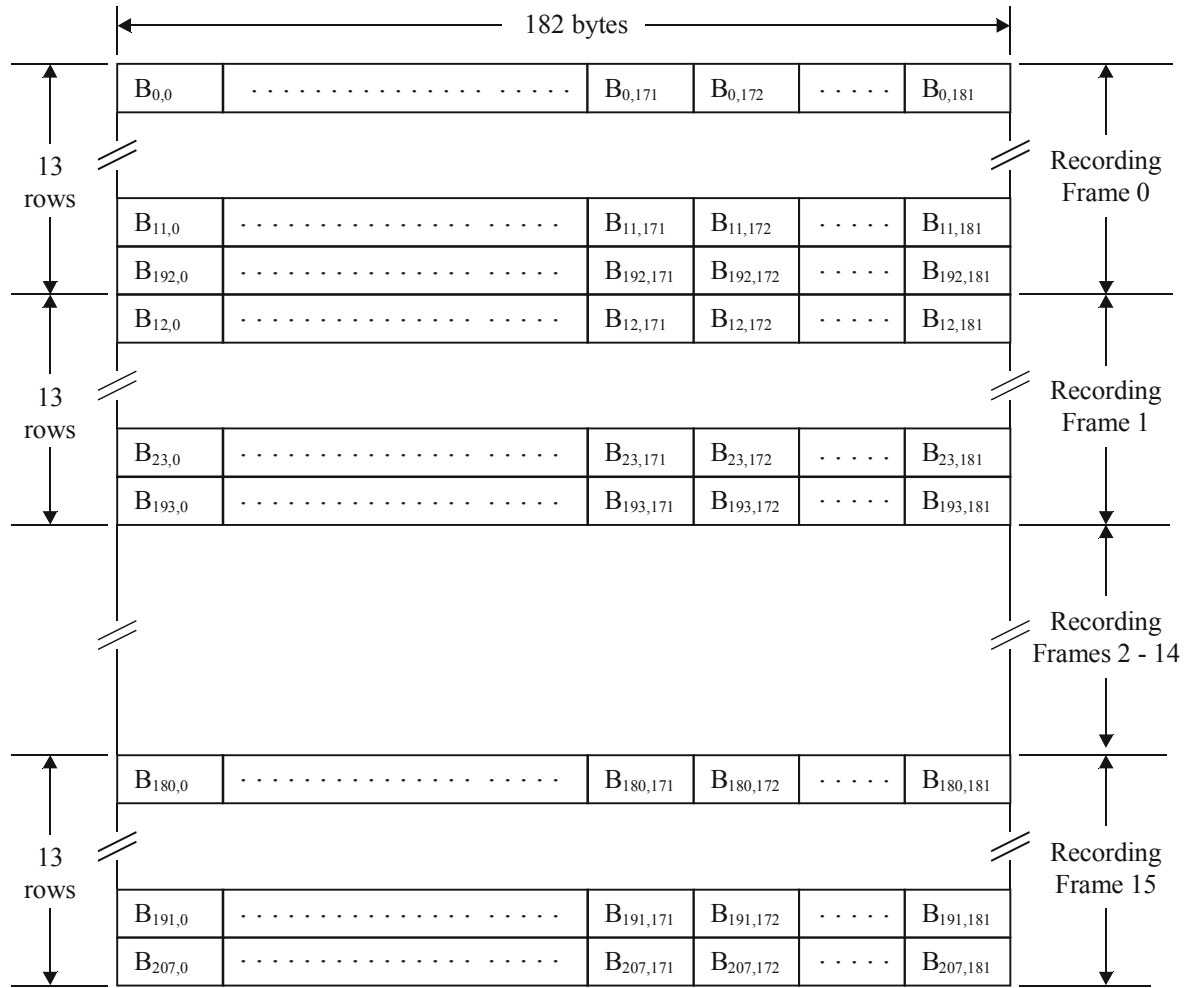
Figure 14 - Recording Frames obtained from an ECC Block

13.5 Modulation and NRZI conversion

The 8-bit bytes of each Recording Frame shall be transformed into 16-bit Code Words with the run length limitation that between 2 ONEs there shall be at least 2 ZEROs and at most 10 ZEROs (RLL(2,10)). Annex H specifies the conversion tables to be applied. The Main Conversion table and the Substitution table specify a 16-bit Code Word for each 256 8-bit bytes with one of 4 States. For each 8-bit byte, the tables indicate the corresponding Code Word, as well as the State for the next 8-bit byte to be encoded.

The 16-bit Code Words shall be NRZI-converted into Channel bits before recording on the disc (see Figure 15). The Channel clock period is the time between 2 consecutive Channel bits.
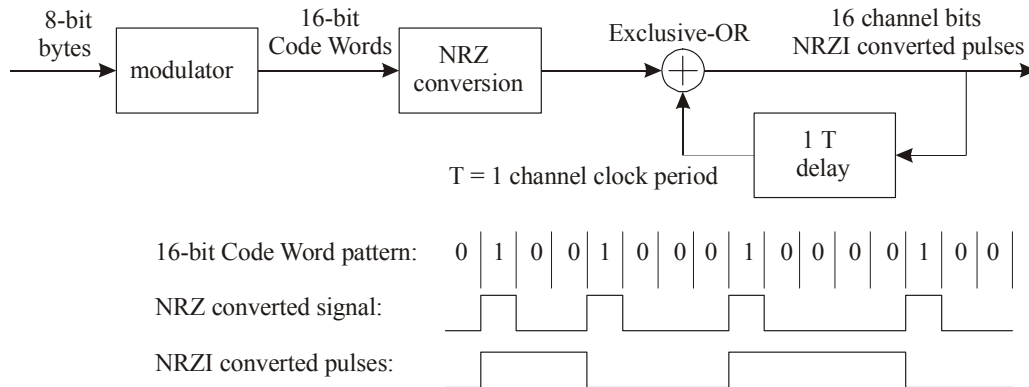
Figure 15 - NRZI conversion

13.6 Physical Sectors

The structure of a Physical Sector is shown in Figure 16. It shall consist of 13 rows, each comprising two Sync Frames. A Sync Frame shall consist of a SYNC Code from Table 2 and 1 456 Channel bits representing 91 8-bit bytes. Each row of the Physical Sector shall consist of two Sync Frames with the first 1 456 Channel bits representing the first 91 bytes of each row of a Recording Frame and the second 1 456 Channel bits representing the second 91 bytes of each row of a Recording Frame.
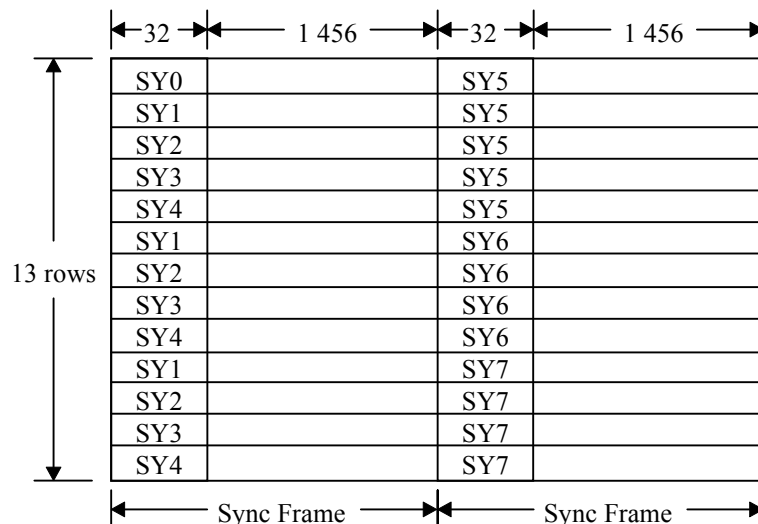
Figure 16 - Physical Sector

Recording of the Physical Sector shall start with the first Sync Frame of the first row, followed by the second Sync Frame of that row, and so on, row-by-row. The state of each SYNC Code and each subsequent set of 16 Channel bits shall follow the rules defined in 13.8.

Table 2 - SYNC Codes

State 1 and State 2 (next state is state 1)			
Primary SYNC codes		Secondary SYNC codes	
(msb)	(lsb)	(msb)	(lsb)
SY0 = 0001001001000100	0000000000010001 /	0001001000000100	0000000000010001
SY1 = 0000010000000100	0000000000010001 /	0000010001000100	0000000000010001
SY2 = 0001000000000100	0000000000010001 /	0001000001000100	0000000000010001
SY3 = 0000100000000100	0000000000010001 /	0000100001000100	0000000000010001
SY4 = 0010000000000100	0000000000010001 /	0010000001000100	0000000000010001
SY5 = 0010001001000100	0000000000010001 /	0010001000000100	0000000000010001
SY6 = 0010010010000100	0000000000010001 /	0010000010000100	0000000000010001
SY7 = 0010010001000100	0000000000010001 /	0010010000000100	0000000000010001
State 3 and State 4 (next state is state 1)			
Primary SYNC codes		Secondary SYNC codes	
(msb)	(lsb)	(msb)	(lsb)
SY0 = 1001001000000100	0000000000010001 /	1001001001000100	0000000000010001
SY1 = 1000010001000100	0000000000010001 /	1000010000000100	0000000000010001
SY2 = 1001000001000100	0000000000010001 /	1001000000000100	0000000000010001
SY3 = 1000001001000100	0000000000010001 /	1000001000000100	0000000000010001
SY4 = 1000100001000100	0000000000010001 /	1000100000000100	0000000000010001
SY5 = 1000100100000100	0000000000010001 /	1000000100000100	0000000000010001
SY6 = 1001000010000100	0000000000010001 /	1000000001000100	0000000000010001
SY7 = 1000100010000100	0000000000010001 /	1000000010000100	0000000000010001

13.7 Layout of a Recording UNit (RUN)

A RUN shall consist of an integer number (M ≥ 1) of sets of 16 Physical Sectors, each from a single ECC Block. The M ECC Blocks shall be preceded by 8 Channel bits, which are meant to reduce possible influences of inaccuracies of the linking point, while the last 8 Channel bits of the last Physical Sector shall be discarded at recording. The 8 linking Channel bits and the next SYNC Code SY0 (chosen from State 1/2 or State 3/4) shall be chosen randomly, such that the runlength constraints specified in 13.5 are fulfilled.

Each RUN of M ECC Blocks (M≥1) starting with ECC Block N shall be recorded in the following way:
8 Channel bits for linking in ECC Block N-1,
full ECC Blocks N to N + M − 2 (if M ≥ 2),
ECC Block N + M − 1, except for the last 8 Channel bits, which bits shall not be recorded.

The positioning of a Recording Unit is shown in Figure 17.

When the RUN starting with ECC Block N is to be recorded, and ECC Block N-1 has not yet been recorded, then the RUN shall be extended with a dummy ECC Block N-1 of which all Main Data bytes shall be set to (00).
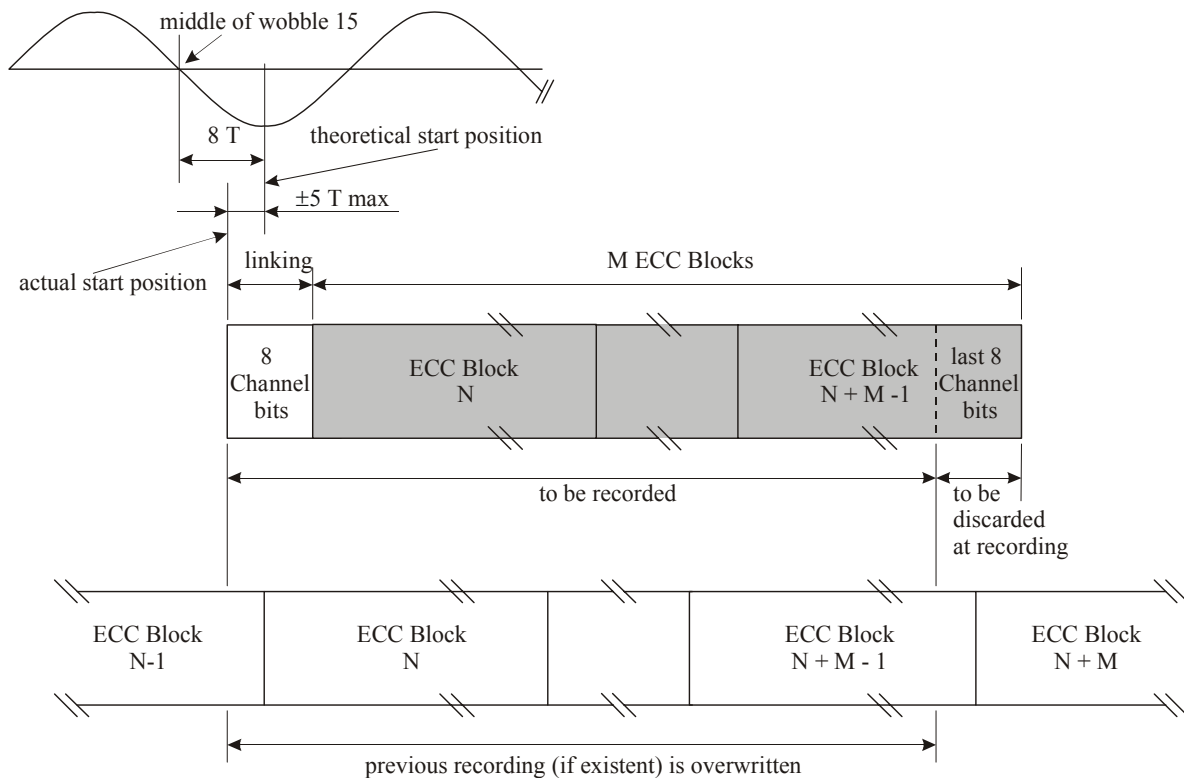
Figure 17 - Recording Unit

13.7.1 Recording Unit position

Each ECC Block, consisting of 16 Physical Sectors, shall correspond to 4 ADIP words (see 14.4.1.1).
RUNs shall be mapped onto the structure of tracks (see 14.4), such that the Physical Sector Numbers (PSN), of which the 2 least significant bits have been discarded, correspond to the local Physical Address in ADIP (PAA).
In mathematical form: PSN = 4×PAA + i , where i = 0, 1, 2, or 3
(for example: Physical Sector Numbers (030000) to (030003) correspond to Physical ADIP Address (00C000)).

The reference for the theoretical start positions is wobble 15 following the ADIP word sync unit of the ADIP words of which the 2 least significant address bits are 00 (see 14.4.1.1 and Figure 21).
The theoretical start position is 8 Channel bits after the nominal position of the zero crossing in the middle of the above mentioned wobble 15 of the wobble signal from Read channel 2.
The start of each recording shall be within ± 5 Channel bits of the theoretical start position.
During writing the Channel bit clock shall be phase locked to the wobble frequency.

13.8   d.c. component suppression control

To ensure a reliable radial tracking and a reliable detection of the HF signals, the low frequency content of the stream of Channel bit patterns should be kept as low as possible. In order to achieve this, the Digital Sum Value (DSV, see 4.3) shall be kept as close to zero as possible. At the beginning of the modulation, the DSV shall be set to 0.

The different ways of diminishing the current value of the DSV are as follows:

a)   Choice of SYNC Codes between Primary or Secondary SYNC Codes.

b)   For the 8-bit bytes in the range 0 to 87, the Substitution table offers an alternative 16-bit Code Word for all States.

c)   For the 8-bit bytes in the range 88 to 255, when the prescribed State is 1 or 4, then the 16-bit Code Word can be chosen either from State 1 or from State 4, so as to ensure that the RLL requirement is met.

In order to use these possibilities, two data streams, Stream 1 and Stream 2, are generated. Stream 1 shall start with the Primary SYNC Code and Stream 2 with the Secondary SYNC Code of the same category of SYNC Codes. As both streams are modulated individually, they generate a different DSV because of the difference between the bit patterns of the Primary and Secondary SYNC Codes.

In the cases b) and c), there are two possibilities to represent a 8-bit byte. The DSV of each stream is computed up to the 8-bit byte preceding the 8-bit byte for which there is this choice. The stream with the lowest $|DSV|$ is selected and duplicated to the other stream. Then, one of the representations of the next 8-bit byte is entered into Stream 1 and the other into Stream 2. This operation is repeated each time case b) or c) occurs.

Whilst case b) always occurs at the same pattern position in both streams, case c) may occur in one of the streams and not in the other because, for instance, the next State prescribed by the previous 8-bit byte can be 2 or 3 instead of 1 or 4. In that case the following 3-step procedure shall be applied:

1)   Compare the $|DSV|$s of both streams.

2)   If the $|DSV|$ of the stream in which case c) occurs is smaller than that of the other stream, then the stream in which case c) has occurred is chosen and duplicated to the other stream. One of the representations of the next 8-bit byte is entered into this stream and the other into the other stream.

3)   If the $|DSV|$ of the stream in which case c) has occurred is larger than that of the other stream, then case c) is ignored and the 8-bit byte is represented according to the prescribed State.

In both cases b) and c), if the $|DSV|$s are equal, the decision to choose Stream 1 or Stream 2 is implementation-defined.

The procedure for case a) shall be as follows:

1)   At the end of each Sync Frame, whether or not case b) and or case c) have occurred, the accumulated DSVs of both streams are compared. The stream with the lower $|DSV|$ is selected and duplicated to the other stream. Then the next Primary SYNC Code and the Secondary SYNC Code of the proper category are inserted each in one of the streams.

Optionally the procedure for case a) can be extended in the following way:

2)   If the DSV at the end of the resulting Sync Frame is greater than + 63 or smaller than -64, then the SYNC Code at the beginning of the Sync Frame is changed from Primary to Secondary or vice versa. If this yields a smaller $|DSV|$, the change is permanent, if the $|DSV|$ is not smaller, the original SYNC Code is retained.

During the DSV computation, the actual values of the DSV may vary between -1 000 and +1 000, thus it is recommended that the count range for the DSV be at least from -1 024 to +1 023.

14   Track format

14.1   Track shape

The area in the Information Zone (see 10.7) shall contain tracks formed from a single spiral groove. Each track shall form a 360° turn of a continuous spiral. The shape of each track is determined by the requirements in Section 5. Recordings shall be made on the groove.

The tracks in the Information Zone contain a phase modulated sinusoidal deviation from the nominal centrelines, called wobble, which contains addressing information.

The tracks shall be continuous in the Information Zone. The groove tracks shall start at a radius of
    22,00 mm max.
and end at a radius of
    58,75 mm min (for 80 mm disc see Annex A).

14.2   Track path

The track path shall be a continuous spiral from the inside (beginning of the Lead-in Zone) to the outside (end of the Lead-out Zone) when the disc rotates counter-clockwise as viewed from the optical head.

14.3   Track pitch

The track pitch is the distance measured between the average track centrelines of adjacent tracks, measured in the radial direction. The track pitch shall be 0,74 μm ± 0,03 μm. The track pitch averaged over the Information Zone shall be 0,74 μm ± 0,01 μm.

14.4   Track layout

The wobble of the tracks is a sinusoidal deviation from the nominal centrelines, with a wavelength of 4,265 6 μm ± 0,045 0 μm (equivalent to 32 Channel bits). The Total Harmonic Distortion (THD) of the oscillator for generating the wobble sine wave shall be ≤ -40 dB.

The wobble is phase modulated by inverting wobble cycles. The information contained in the wobble modulation is called Address-in-Pregroove or ADIP (see 14.4.1.1).

14.4.1   ADIP information

The data to be recorded onto the disc must be aligned with the ADIP information modulated in the wobble. Therefore 93 wobbles shall correspond to 2 Sync Frames. Of each 93 wobbles, 8 wobbles are phase modulated with ADIP information (see Figure 18).

1 wobble equals 32 Channel bits (= 32T)
one ADIP unit = 8 modulated wobbles per 2 Sync Frames
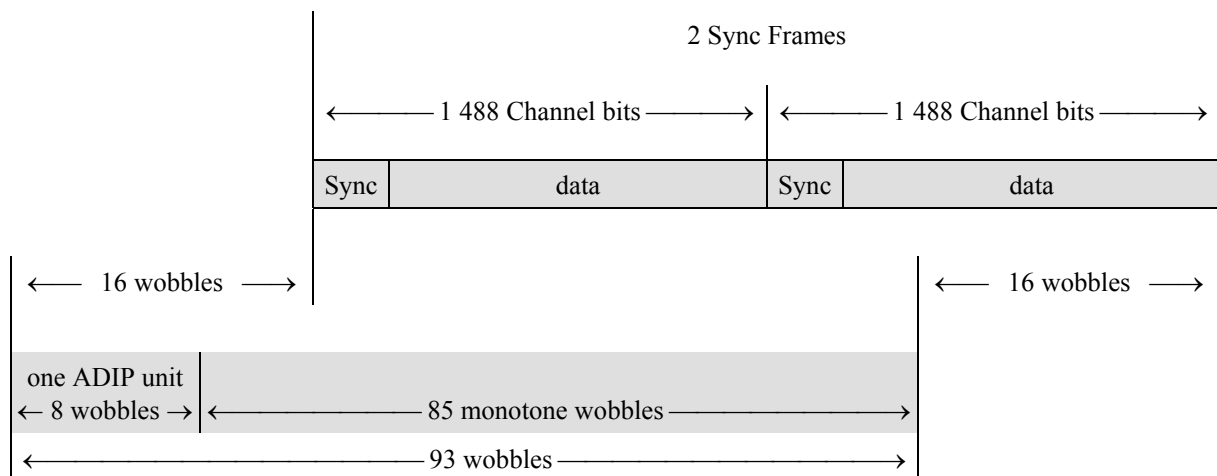
Figure 18 – General ADIP structure

14.4.1.1   ADIP word structure

52 ADIP units are grouped into one ADIP word each.
This means that one ADIP word corresponds to $4 \times 13 \times 2$ Sync Frames $\equiv$ 4 Physical Sectors.

Each ADIP word shall consist of: 1 ADIP sync unit + 51 ADIP data units.
ADIP sync unit = 4 inverted wobbles for word sync + 4 monotone wobbles.
ADIP data unit = 1 inverted wobble for bit sync + 3 monotone wobbles + 4 wobbles representing one data bit. (see 14.4.1.3)

			wobble 0	wobble 1 to 3	wobble 4 to 7		
↑	↑	sync unit	word sync			↑	↑
		data unit	bit sync		data bit 1		
	ADIP	data unit	bit sync		data bit 2	4 Physical	
4	word	:	:	:	:	Sectors	1
ADIP		:	:	:	:		ECC
words	↓	data unit	bit sync		data bit 51	↓	Block
↓							↓
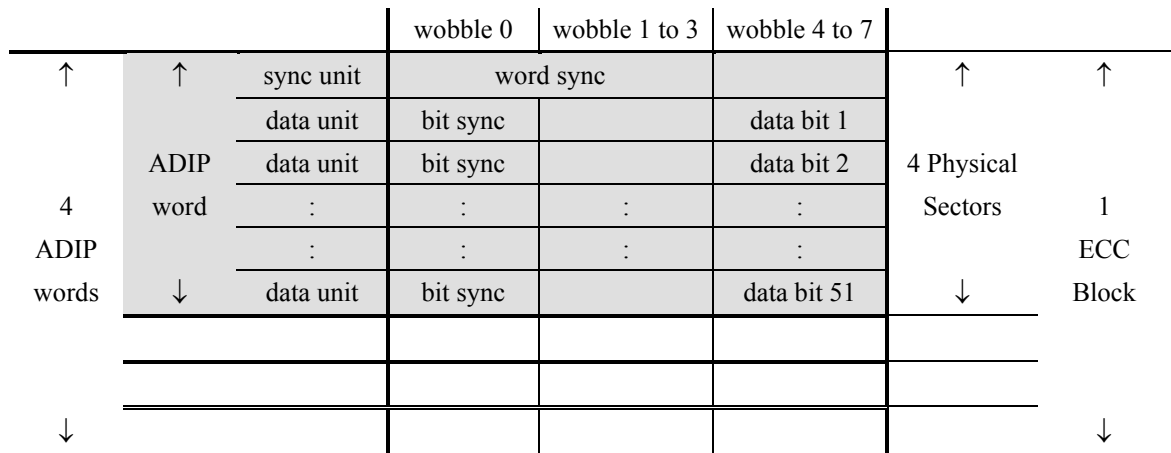
Figure 19 - ADIP word structure

The information contained in the data bits is as follows:

bit 1:   this bit is **reserved** and shall be set to ZERO.

bits 2 to 23:   these 22 bits contain a **Physical ADIP Address**.
Data bit 2 is the msb and data bit 23 is the lsb. The addresses increase by one for each next ADIP word.
The first address in the Information Zone shall be such that Physical ADIP Address (00C000) is located at radius $24{,}00^{+0,00}_{-0,20}$ mm .

Physical ADIP Address (098150), which is the first address corresponding to the Lead-out Zone, shall be located at a radius $\leq$ 58,00 mm (for 80 mm disc see Annex A).

bits 24 to 31:   these 8 bits contain **auxiliary information** about the disc.
Bit 24 to 31 from 256 consecutive ADIP words, shall form one ADIP Aux Frame with 256 bytes of information. The first byte of each ADIP Aux Frame shall be located in an ADIP word with a Physical ADIP Address that is a multiple of 256 (Physical ADIP Address = (xxxx00)).

In the Lead-in Zone of the disc the auxiliary bytes shall be used for storing Physical format information. The contents of the 256 bytes are defined in Table 3 and 14.4.2.

In the Data Zone of the disc the auxiliary bytes may be used for storing Extended format information as defined in Annex B. If not used for such purpose all bytes shall be set to (00).

In the Lead-out Zone of the disc the auxiliary bytes shall be set to (00).

bits 32 to 51:   these 20 bits contain **error correction parities** for the ADIP information (see 14.4.1.2).

14.4.1.2   ADIP error correction

For the ADIP error correction the ADIP data bits are grouped into 4-bit nibbles.
The mapping of the data bits into the nibble array is defined in Figure 20. Bit 0 is a dummy bit, which shall be considered as set to ZERO for the error corrector.

nibble N_0	bit 0	bit 1	bit 2	bit 3	↑		
nibble N_1	bit 4	bit 5	:	:		6	ADIP
:	:	:	:	:		nibbles	address
:	bit 20	:	:	bit 23	↓		
:	bit 24				↑ 2		AUX
nibble N_7	bit 28		:	bit 31	↓ nibbles		data
nibble N_8	bit 32	:	:	:	↑		nibble
:	:	:	:	:		5	based
:	:	:	:	:		nibbles	R-S
nibble N_{12}	bit 48	bit 49	bit 50	bit 51	↓		ECC

Figure 20 - ADIP error correction structure

A nibble-based RS (13,8,6) code is constructed, of which the 5 parity nibbles N_8 to N_{12}, are defined by the remainder polynomial R(x):

$$R(x) = \sum_{i=8}^{12} N_i \, x^{12-i} = I(x) \, x^5 \bmod G_{PA}(x)$$

where

$$I(x) = \sum_{i=0}^{7} N_i \, x^{7-i} \quad \text{and} \quad G_{PA}(x) = \prod_{k=0}^{4} (x + \alpha^k)$$

α is the primitive root 0010 of the primitive polynomial $P(x) = x^4 + x + 1$

All bits of the 5 parity nibbles N_8 to N_{12} shall be inverted before recording.

14.4.1.3   ADIP modulation rules

The ADIP units are modulated by inverting some of the 8 wobble cycles:

- PW is a positive wobble, which shall start moving towards the inside of the disc.
- NW is a negative wobble, which shall start moving towards the outside of the disc.
- all monotone wobbles shall be PWs.

Modulation of the ADIP word sync:
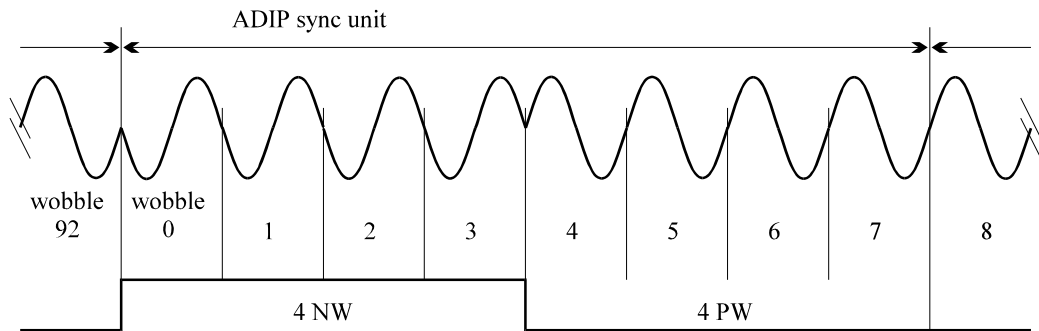
Modulation of an ADIP ZERO bit:
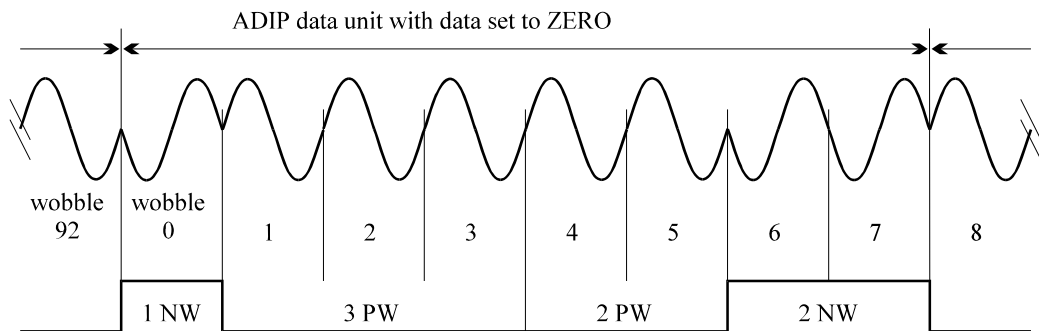
Modulation of an ADIP ONE bit:
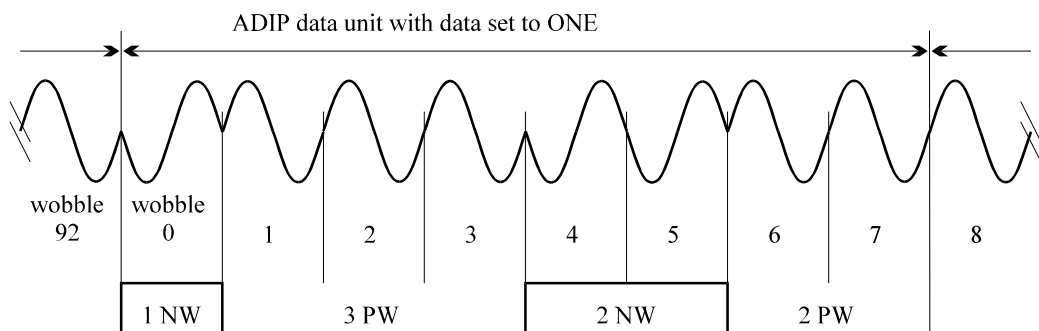
Figure 21 - ADIP modulation rules

14.4.2 **Physical format information in ADIP**

This information shall comprise the 256 bytes shown in Table 3. It contains disc information and values for the write strategy parameters to be used with the Optimum Power Control (OPC) algorithm to determine optimum laser power levels for writing (see Annex G and Annex I). The information is copied to the Control Data Zone (see 17.11.1) during initialization of the disc.

Table 3 - Physical format information

Byte number	Content	Number of bytes
0	Disc Category and Version Number	1
1	Disc size	1
2	Disc structure	1
3	Recording density	1
4 to 15	Data Zone allocation	12
16	General Flag bits	1
17	Disc Application Code	1
18	Extended Information Indicators	1
19 to 26	Disc Manufacturer ID	8
27 to 29	Media Type ID	3
30	Product revision number	1
31	number of Physical format information bytes in use in ADIP up to byte 63	1
32 to 63	Reserved - All (00)	32
64 to 95	Extended Information block 0	32
96 to 127	Extended Information block 1	32
128 to 159	Extended Information block 2	32
160 to 191	Extended Information block 3	32
192 to 223	Extended Information block 4	32
224 to 255	Extended Information block 5	32

This version of this document specifies one type of discs, with different recording velocities. The specific write parameters for each recording velocity shall be specified in one set of 2 EI blocks (see 14.4.2.3). The following type of disc (characterized by the so-called X-speed) has now been defined and its ADIP shall contain the EI Blocks as indicated in Table 4.

Table 4 - Types of discs

type of disc	basic write strategy bytes 32 to 63 (not applicable)	8x write strategy EI blocks Format 2 (3,3x, 6x & 8x speed)	remarks
"8x"	–	+	this disc shall be suited for recording speeds of 11,5, 20,9 & 27,9 m/s

+ shall be present   – shall not be used

14.4.2.1 General information – Bytes 0 to 31

Byte 0 - Disc Category and Version Number

Bits b_7 to b_4 shall specify the Disc Category,
bit b_7 shall be set to 1 indicating a disc according to the DVD+R/+RW Format (see clause 3),
bit b_6 shall be set to 0 indicating a single layer disc,
bits b_5 and b_4 shall be set to 01 indicating a DVD+RW disc.

Bits b_3 to b_0 shall specify the Version Number,
they shall be set to 0011 indicating this DVD+RW HS System Description.
This Version Number identifies amongst others that there is no basic write strategy defined in
bytes 32 to 63. Drives not acquainted with the specific Version Number of a disc should not
try to record on that disc using a basic write strategy (see Annex M).

*Note: Version number 0000 can be used for identification of test discs. Such test discs might not contain the
correct Physical format information in their ADIP Aux Frames.*

Byte 1 - Disc size and maximum transfer rate

Bits b_7 to b_4 shall specify the disc size,
they shall be set to 0000, indicating a 120 mm disc (for 80 mm disc see Annex A)

Bits b_3 to b_0 shall specify the maximum read transfer rate,
they shall be set to 1111 indicating no maximum read transfer rate is specified

Byte 2 - Disc structure

Bits b_7 to b_4 shall be set to 0000

Bits b_3 to b_0 shall specify the type of the recording layer(s):
they shall be set to 0100, indicating a rewritable recording layer.

Byte 3 - Recording density

Bits b_7 to b_4 shall specify the average Channel bit length in the Information Zone,
they shall be set to 0000, indicating 0,133 μm

Bits b_3 to b_0 shall specify the average track pitch,
they shall be set to 0000, indicating an average track pitch of 0,74 μm

Bytes 4 to 15 - Data Zone allocation

Byte 4   shall be set to (00).

Bytes 5 to 7   shall be set to (030000) to specify PSN 196 608 of the first Physical Sector
of the Data Zone

Byte 8   shall be set to (00).

Bytes 9 to 11   shall be set to (26053F) to specify PSN 2 491 711 as the last possible Physical Sector
of the Data Zone (for 80 mm disc see Annex A).

Bytes 12 to 15   shall be set to (00)

Byte 16 – General Flag bits

Bit b_7 shall be set to ZERO

Bit b_6 shall specify if the disc contains Extended format information in the ADIP Aux Frames in the
Data Zone related to the VCPS copy protection system,
shall be set to 0,   indicating no Extended format information for VCPS is present,
shall be set to 1,   indicating the Data Zone contains Extended format information for VCPS
as defined in Annex B and the VCPS System Description (see clause 3).

Bit b_5 is reserved for use in the Control Data Zone and shall be set to ZERO

Bits b_4 to b_0 are reserved and shall be set to 0 0000

Byte 17 – Disc Application Code

This byte can identify discs that are restricted to be used for special applications only. Drives not able to identify the particular application related to a specific Disc Application Code or not able to act according to the rules as defined for this particular application are not allowed to write on a disc with such a code.

> (00) identifies a disc for General Purpose use
>   (no restrictions, all drives are allowed to write on a disc carrying this code),
> all other codes are reserved and shall be registered before use.

Registration of Disc Application Codes shall be requested from Royal Philips Electronics.
(for detailed address information see backside of inner title page of this document)

Byte 18 – Extended Information indicators

Bits b_7 to b_6 are reserved and shall be set to 00

Bits b_5 to b_0 each of these bits shall indicate the presence of an Extended Information block.
Bit b_i shall be set to 1 if Extended Information block i, consisting of bytes $(64 + i \times 32)$ to $(95 + i \times 32)$, is in use. Else bit b_i shall be set to 0.

Bytes 19 to 26 – Disc Manufacturer ID

These 8 bytes shall identify the manufacturer of the disc. This name shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

If the Disc Manufacturer ID is not used these 8 bytes shall be set to (00)

Bytes 27 to 29 – Media Type ID

Disc manufacturers can have different types of media, which shall be specified by these 3 bytes. The specific type of disc is denoted in this field by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

If the Media Type ID is not used these 3 bytes shall be set to (00)

Note: Discs with different characteristics shall be identified by different and unique combinations of Disc Manufacturer ID / Media Type ID. Therefore the content of bytes 19 to 29 shall be approved by the licensors of the DVD+RW system.

Byte 30 – Product revision number

This byte shall identify the product revision number in binary notation. All discs with the same Disc Manufacturer ID and the same Media Type ID, regardless of Product revision numbers, must have the same recording properties (only minor differences are allowed: Product revision numbers shall be irrelevant for recorders). The content of this byte can be chosen freely by the disc manufacturer.

If not used this byte shall be set to (00)

Byte 31 – number of Physical format information bytes in use in ADIP up to byte 63

This byte forms one 8-bit binary number indicating the number of bytes actually in use for the basic Physical format information (in bytes 0 to 63). It shall be set to (20) indicating that only the first 32 bytes of the Physical format information are used.

14.4.2.2   **Basic write strategy parameters – Bytes 32 to 63**

Bytes 32 to 63 - Reserved - All (00)

These bytes shall be set to all (00).

14.4.2.3 **Extended Information blocks – Bytes (64 + i×32) to (95 + i×32) with i = 0 to 5**

Extended Information (EI) blocks are meant to facilitate future extensions. Each such block consists of 32 bytes. These bytes can hold for instance parameters for alternative write strategies or other advanced parameters. If a set of parameters does not fit in one Extended Information block, additional continuation blocks can be added, which additional blocks are identified by a Continuation bit.

The presence of an Extended Information block shall be indicated by the appropriate bit in byte 18. If an Extended Information block is not used, all 32 bytes shall be set to (00).

Byte (64 + i×32)   **Extended Information block i Format number / Continuation bit**

Bits b_6 to b_0 indicate the Format number which identifies the definitions of the data in bytes (65 + i×32) to (95 + i×32).

If bit b_7 is set to ONE, the related Extended Information block is not an independent block but a continuation of the preceding Extended Information block. The Format number in a continuation block shall be the same as the Format number in the preceding Extended Information block.

A disc can have several Extended Information blocks. The contents of blocks with different Format numbers have to be interpreted each according to their respective definitions. The contents of blocks with the same Format number are interpreted in the same way; the parameters specified in these blocks however can have different values.

Drives not acquainted with the specific Format number in block i, should not use the parameters in this Extended Information block (see Annex M).

Note: the contents of an EI block are identified by the Format number of the block only. The position of the EI block in the ADIP Aux Frame is irrelevant for this, so an EI block with Format number n could be allocated at any position i. Therefore drives should always check the Format numbers in the EI blocks to be sure that the write strategies are correctly interpreted.

Bytes (65 + i×32) to (95 + i×32)

Each parameter set defined for these bytes shall be identified by a unique Format number.

14.4.2.3.1 **Extended information for the "8x" write strategy**

This Extended Information block specifies the parameters for a write strategy usable at speeds ranging from 11,5 m/s up to 27,9 m/s, which is equivalent to 3,3x up to 8x the basic DVD speed (3,49 m/s). The write strategy used at these speeds is a so-called N/2 or 2T write strategy as defined in Annex G.

For optimum results, some parameters are defined at three different speeds:
- the Lower velocity, which shall be 11,5 m/s (3,3x),
- the Intermediate velocity, which shall be 20,9 m/s (6x) and
- the Upper velocity, which shall be 27,9 m/s (8x).

Because of too high rotational speeds at the inner side, the write strategy parameters for the Upper velocity shall be determined at the outer side of the disc (see 9.5).

Bit b_0 of the Specific Flag bits (byte 66) indicates if the disc can be recorded in CAV mode by using parameter values which are determined from the given sets for the above speeds by a linear interpolation.

Because the total set of parameters needed to define the full write strategy at all 3 speeds is too large to fit in one Extended Information block, an additional continuation block shall be used.

If a disc can not be recorded under these "8x" conditions, these EI blocks shall not be used (all bytes set to (00) and related Extended Information indicator bits set to ZERO).

Byte 18 – Extended Information indicators

This byte shall be set to xxxx xx11 indicating Extended Information block 0 and block 1 are in use.

Table 5 - Extended Information block 0

Byte number	Content	Number of bytes
64	Continuation bit / Format number	1
65	Reserved - set to (00)	1
66	Specific Flag bits	1
67	Lower recording velocity for the parameter set in this EI block	1
68	Upper recording velocity for the parameter set in this EI block	1
69	Intermediate recording velocity for the parameter set in this EI block	1
70	Maximum read power at Lower velocity	1
71	P_{IND} at Lower velocity	1
72	ρ at Lower velocity	1
73	ε_1 at Lower velocity	1
74	ε_2 at Lower velocity	1
75	γ_{target} at Lower velocity	1
76	Maximum read power at Upper velocity	1
77	P_{IND} at Upper velocity	1
78	ρ at Upper velocity	1
79	ε_1 at Upper velocity	1
80	ε_2 at Upper velocity	1
81	γ_{target} at Upper velocity	1
82	Maximum read power at Intermediate velocity	1
83	P_{IND} at Intermediate velocity	1
84	ρ at Intermediate velocity	1
85	ε_1 at Intermediate velocity	1
86	ε_2 at Intermediate velocity	1
87	γ_{target} at Intermediate velocity	1
88 to 89	Reserved - All (00)	2
90	T_{mp} multi pulse duration for $\geq 4T$ at Lower velocity	1
91	T_{mp} multi pulse duration for $\geq 4T$ at Upper velocity	1
92	T_{mp} multi pulse duration for $\geq 4T$ at Intermediate velocity	1
93 to 95	Reserved - All (00)	3

Table 6 - Extended Information block 1

Byte number	Content	Number of bytes
96	Continuation bit / Format number	1
97	Reserved - set to (00)	1
98	T_3 pulse duration for 3T at Lower velocity	1
99	T_{top} first pulse duration for ≥4T at Lower velocity	1
100	dT_{top} first pulse lead/lag time for ≥6T at Lower velocity	1
101	$dT_{top,5}$ first pulse lead/lag time for 5T at Lower velocity	1
102	$dT_{top,4}$ first pulse lead/lag time for 4T at Lower velocity	1
103	$dT_{top,3}$ pulse lead/lag time for 3T at Lower velocity	1
104	$dT_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Lower velocity	1
105	$dT_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Lower velocity	1
106	$dT_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Lower velocity	1
107	$dT_{era,3}$ erase lead/lag time for 3T at Lower velocity	1
108	T_3 pulse duration for 3T at Upper velocity	1
109	T_{top} first pulse duration for ≥4T at Upper velocity	1
110	dT_{top} first pulse lead/lag time for ≥6T at Upper velocity	1
111	$dT_{top,5}$ first pulse lead/lag time for 5T at Upper velocity	1
112	$dT_{top,4}$ first pulse lead/lag time for 4T at Upper velocity	1
113	$dT_{top,3}$ pulse lead/lag time for 3T at Upper velocity	1
114	$dT_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Upper velocity	1
115	$dT_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Upper velocity	1
116	$dT_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Upper velocity	1
117	$dT_{era,3}$ erase lead/lag time for 3T at Upper velocity	1
118	T_3 pulse duration for 3T at Intermediate velocity	1
119	T_{top} first pulse duration for ≥4T at Intermediate velocity	1
120	dT_{top} first pulse lead/lag time for ≥6T at Intermediate velocity	1
121	$dT_{top,5}$ first pulse lead/lag time for 5T at Intermediate velocity	1
122	$dT_{top,4}$ first pulse lead/lag time for 4T at Intermediate velocity	1
123	$dT_{top,3}$ pulse lead/lag time for 3T at Intermediate velocity	1
124	$dT_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Intermediate velocity	1
125	$dT_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Intermediate velocity	1
126	$dT_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Intermediate velocity	1
127	$dT_{era,3}$ erase lead/lag time for 3T at Intermediate velocity	1

Byte 64 - Extended Information block 0 Continuation bit / Format number

This byte shall be set to 0000 0010 indicating Format 2 and this block not being a continuation block, for which bytes 65 to 95 have the following meaning:

Byte 65 - Reserved

This byte is reserved and shall be set to (00)

Byte 66 – Specific Flag bits

Bits b_7 to b_1 are reserved and shall be set to 0000 000

Bit b_0 shall specify if the disc is recordable in CAV mode:
it shall be set to 0,   indicating recording in CAV mode with parameter values derived from the specified ones for 3,3x, 6x and 8x by a linear interpolation is possible (by piece-wise interpolation between 3,3x and 6x and between 6x and 8x),
it shall be set to 1,   indicating that CAV mode is not specified. In this case only recording in CLV mode at the specified Lower, Intermediate and Upper velocity has been tested.

Byte 67 – Lower recording velocity for the parameter set in this EI block

This byte indicates the lowest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{Lower,EI\ 0} \text{ (}n\text{ rounded off to an integral value)}$$

It shall be
set to (2E) indicating a Lower writing speed of about 11,5 m/s (3,3x).

Byte 68 – Upper recording velocity for the parameter set in this EI block

This byte indicates the highest recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{Upper,EI\ 0} \text{ (}n\text{ rounded off to an integral value)}$$

It shall be
set to (70) indicating an Upper writing speed of about 28 m/s (8x).

Byte 69 – Intermediate recording velocity for the parameter set in this EI block

This byte indicates the intermediate recording velocity of the disc for the parameters as defined in this EI block. This recording velocity shall be specified as a number n such that

$$n = 4 \times v_{Intermediate,EI\ 0} \text{ (}n\text{ rounded off to an integral value)}$$

It shall be
set to (54) indicating an Intermediate writing speed of about 21 m/s (6x).

Byte 70 - Maximum read power, P_r at Lower velocity

This byte shall specify the maximum read power P_r in milliwatts at the Lower velocity as a number n such that

$$n = 20 \times (P_r - 0{,}7)$$

Byte 71 - P_{IND} at Lower velocity

P_{IND} is the starting value for the determination of P_{target} used in the OPC algorithm, see Annex I.
This byte shall specify the indicative value P_{IND} of P_{target} in milliwatts at the Lower velocity as a number n such that

$$n = 5 \times (P_{IND} - 5)$$

Byte 72 - ρ at Lower velocity

This byte shall specify the Write power multiplication factor ρ at the Lower velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times \rho$$

Byte 73 - ε_1 at Lower velocity

This byte shall specify the Erase/Write power ratio ε_1 at the Lower velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 200 \times \varepsilon_1$$

Byte 74 - ε_2 at Lower velocity

This byte shall specify the Cooling/Write power ratio ε_2 at the Lower velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 1\ 000 \times \varepsilon_2$$

Byte 75 - γ_{target} at Lower velocity

This byte shall specify the target value for γ, γ_{target} at the Lower velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 20 \times \gamma_{target}$$

Byte 76 - Maximum read power, P_r at Upper velocity

This byte shall specify the maximum read power P_r in milliwatts at the Upper velocity as a number n such that

$$n = 20 \times (P_r - 0{,}7)$$

Byte 77 - P_{IND} at Upper velocity

P_{IND} is the starting value for the determination of P_{target} used in the OPC algorithm, see Annex I.
This byte shall specify the indicative value P_{IND} of P_{target} in milliwatts at the Upper velocity as a number n such that

$$n = 5 \times (P_{IND} - 5)$$

Byte 78 - ρ at Upper velocity

This byte shall specify the Write power multiplication factor ρ at the Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 100 \times \rho$$

Byte 79 - ε_1 at Upper velocity

This byte shall specify the Erase/Write power ratio ε_1 at the Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 200 \times \varepsilon_1$$

Byte 80 - ε_2 at Upper velocity

This byte shall specify the Cooling/Write power ratio ε_2 at the Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 1\ 000 \times \varepsilon_2$$

Byte 81 - γ_{target} at Upper velocity

This byte shall specify the target value for γ, γ_{target} at the Upper velocity used in the OPC algorithm (see Annex I) as a number n such that

$$n = 20 \times \gamma_{target}$$

Byte 82 - Maximum read power, P_r at Intermediate velocity

This byte shall specify the maximum read power P_r in milliwatts at the Intermediate velocity as a number n such that

$$n = 20 \times (P_r - 0{,}7)$$

Byte 83 - P_{IND} at Intermediate velocity

P_{IND} is the starting value for the determination of P_{target} used in the OPC algorithm, see Annex I.
This byte shall specify the indicative value P_{IND} of P_{target} in milliwatts at the Intermediate velocity as a number n such that

$n = 5 \times (P_{IND} - 5)$

Byte 84 - ρ at Intermediate velocity

This byte shall specify the Write power multiplication factor ρ at the Intermediate velocity used in the OPC algorithm (see Annex I) as a number n such that

$n = 100 \times \rho$

Byte 85 - ε_1 at Intermediate velocity

This byte shall specify the Erase/Write power ratio ε_1 at the Intermediate velocity used in the OPC algorithm (see Annex I) as a number n such that

$n = 200 \times \varepsilon_1$

Byte 86 - ε_2 at Intermediate velocity

This byte shall specify the Cooling/Write power ratio ε_2 at the Intermediate velocity used in the OPC algorithm (see Annex I) as a number n such that

$n = 1\,000 \times \varepsilon_2$

Byte 87 - γ_{target} at Intermediate velocity

This byte shall specify the target value for γ, γ_{target} at the Intermediate velocity used in the OPC algorithm (see Annex I) as a number n such that

$n = 20 \times \gamma_{target}$

Bytes 88 to 89 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 90 – T_{mp} multi pulse duration for $\geq$4T at Lower velocity

This byte shall specify the duration of the second and next pulses of the multi pulse train when the current mark is a 4T or greater mark for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times {T_{mp}}/{T_W} \qquad \text{and} \qquad 3 \leq n \leq 16$$

Byte 91 – T_{mp} multi pulse duration for $\geq$4T at Upper velocity

This byte shall specify the duration of the second and next pulses of the multi pulse train when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times {T_{mp}}/{T_W} \qquad \text{and} \qquad 3 \leq n \leq 16$$

Byte 92 – T_{mp} multi pulse duration for $\geq$4T at Intermediate velocity

This byte shall specify the duration of the second and next pulses of the multi pulse train when the current mark is a 4T or greater mark for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times {T_{mp}}/{T_W} \qquad \text{and} \qquad 3 \leq n \leq 16$$

Bytes 93 to 95 - Reserved - All (00)

These bytes shall be set to all (00).

Byte 96 - Extended Information block 1 Continuation bit / Format number

This byte shall be set to 1000 0010 indicating Format 2 and this block being a continuation block, for which bytes 97 to 127 have the following meaning:

Byte 97 - Reserved

This byte is reserved and shall be set to (00)

Byte 98 – T_3 pulse duration for 3T at Lower velocity

This byte shall specify the duration of the pulse when the current mark is a 3T mark for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_3}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 99 – T_{top} first pulse duration for ≥4T at Lower velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 100 – dT_{top} first pulse lead/lag time for ≥6T at Lower velocity

When the current mark is a ≥6T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 101 – $dT_{top,5}$ first pulse lead/lag time for 5T at Lower velocity

When the current mark is a 5T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,5}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 102 – $dT_{top,4}$ first pulse lead/lag time for 4T at Lower velocity

When the current mark is a 4T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,4}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 103 – dT$_{top,3}$ pulse lead/lag time for 3T at Lower velocity

When the current mark is a 3T mark, this byte shall specify the lead or lag time of the pulse relative to the trailing edge of the first Channel bit of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,3}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 104 – dT$_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Lower velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the last pulse of the multi pulse train relative to the leading edge of the last Channel bit of the data pulse, for recording at Lower velocity (see Annex G). dT$_{lp,O}$ adds to the length of the last pulse such that this becomes $T_{mp} + dT_{lp,O}$. The value of dT$_{lp,O}$ is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{lp,O}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 105 – dT$_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Lower velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,O}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 106 – dT$_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Lower velocity

When the length of the current mark is an even number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,E}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 107 – dT$_{era,3}$ erase lead/lag time for 3T at Lower velocity

When the length of the current mark is 3T, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Lower velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,3}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 108 – T$_3$ pulse duration for 3T at Upper velocity

This byte shall specify the duration of the pulse when the current mark is a 3T mark for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_3}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 109 – T_{top} first pulse duration for ≥4T at Upper velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 110 – dT_{top} first pulse lead/lag time for ≥6T at Upper velocity

When the current mark is a ≥6T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 111 – $dT_{top,5}$ first pulse lead/lag time for 5T at Upper velocity

When the current mark is a 5T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,5}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 112 – $dT_{top,4}$ first pulse lead/lag time for 4T at Upper velocity

When the current mark is a 4T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,4}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 113 – $dT_{top,3}$ pulse lead/lag time for 3T at Upper velocity

When the current mark is a 3T mark, this byte shall specify the lead or lag time of the pulse relative to the trailing edge of the first Channel bit of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top,3}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 114 – $dT_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Upper velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the last pulse of the multi pulse train relative to the leading edge of the last Channel bit of the data pulse, for recording at Upper velocity (see Annex G). $dT_{lp,O}$ adds to the length of the last pulse such that this becomes $T_{mp} + dT_{lp,O}$. The value of $dT_{lp,O}$ is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{lp,O}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 115 – dT$_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Upper velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,O}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 116 – dT$_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Upper velocity

When the length of the current mark is an even number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,E}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 117 – dT$_{era,3}$ erase lead/lag time for 3T at Upper velocity

When the length of the current mark is 3T, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Upper velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,3}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 118 – T$_3$ pulse duration for 3T at Intermediate velocity

This byte shall specify the duration of the pulse when the current mark is a 3T mark for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_3}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 119 – T$_{top}$ first pulse duration for ≥4T at Intermediate velocity

This byte shall specify the duration of the first pulse of the multi pulse train when the current mark is a 4T or greater mark for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as an unsigned binary number n such that

$$n = 16 \times \frac{T_{top}}{T_W} \qquad \text{and} \qquad 3 \leq n \leq 24$$

Byte 120 – dT$_{top}$ first pulse lead/lag time for ≥6T at Intermediate velocity

When the current mark is a ≥6T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{top}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 121 – dT$_{top,5}$ first pulse lead/lag time for 5T at Intermediate velocity

When the current mark is a 5T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \dfrac{dT_{top,5}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 122 – dT$_{top,4}$ first pulse lead/lag time for 4T at Intermediate velocity

When the current mark is a 4T mark, this byte shall specify the lead or lag time of the first pulse of the multi pulse train relative to the trailing edge of the first Channel bit of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \dfrac{dT_{top,4}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 123 – dT$_{top,3}$ pulse lead/lag time for 3T at Intermediate velocity

When the current mark is a 3T mark, this byte shall specify the lead or lag time of the pulse relative to the trailing edge of the first Channel bit of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \dfrac{dT_{top,3}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 124 – dT$_{lp,O}$ last pulse lead/lag time for 5T, 7T, 9T & 11T at Intermediate velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the last pulse of the multi pulse train relative to the leading edge of the last Channel bit of the data pulse, for recording at Intermediate velocity (see Annex G). dT$_{lp,O}$ adds to the length of the last pulse such that this becomes T$_{mp}$ + dT$_{lp,O}$. The value of dT$_{lp,O}$ is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \dfrac{dT_{lp,O}}{T_W} \qquad \text{and} \qquad -8 \leq n \leq 8$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 125 – dT$_{era,O}$ erase lead/lag time for 5T, 7T, 9T & 11T at Intermediate velocity

When the length of the current mark is an odd number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \dfrac{dT_{era,O}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 126 – dT$_{era,E}$ erase lead/lag time for 4T, 6T, 8T, 10T & 14T at Intermediate velocity

When the length of the current mark is an even number of Channel bits, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,E}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Byte 127 – dT$_{era,3}$ erase lead/lag time for 3T at Intermediate velocity

When the length of the current mark is 3T, this byte shall specify the lead or lag time of the erase pulse relative to the trailing edge of the data pulse, for recording at Intermediate velocity (see Annex G). The value is expressed in fractions of the Channel bit clock period as a two's compliment binary number n such that

$$n = 16 \times \frac{dT_{era,3}}{T_W} \qquad \text{and} \qquad -24 \leq n \leq 16$$

(positive numbers indicate a lead time, negative numbers indicate a lag time)

Section 4 - Format of the Information Zone

15 General description of the Information Zone

The Information Zone shall contain all information on the disc relevant for data interchange. It shall be divided in three parts: the Lead-in Zone, the Data Zone and the Lead-out Zone. In double-sided discs there is one Information Zone per side. The Data Zone is intended for the recording of User Data. The Lead-in Zone contains control information and an area for disc and drive testing. The Lead-out Zone allows for a continuous smooth lead-out and also contains control information and a disc and drive test Zone.

The Lead-in Zone, the Data Zone and the Lead-out Zone constitute the Rewritable area in which the information is recorded using the Phase change effect.

16 Layout of the Information Zone

The Information Zone of single-sided and of each side of double-sided discs shall be sub-divided as shown in Table 7. The radii indicated in Table 7 for some of the Zones are the nominal values of the centre of the first (or last) track of the Zone.

Table 7 - Layout of the Information Zone of a fully formatted disc (for 80 mm disc see Annex A)

	Description	Nominal radius in mm	PSN of the first Physical Sector	Number of Physical Sectors
Lead-in	Initial Zone	start 22,000 mm	(01D830)	52 304 nominal
	Inner Disc Test Zone	start 23,400 mm	(02A480)	2 048
	Inner Drive Test Zone		(02AC80)	12 288
	Guard Zone 1		(02DC80)	512
	Reserved Zone 1	start 23,782 mm	(02DE80)	4 096
	Reserved Zone 2	start 23,886 mm	(02EE80)	64
	Inner Disc Identification Zone		(02EEC0)	256
	Reserved Zone 3		(02EFC0)	64
	Reference Code Zone	start 23,896 mm	(02F000)	32
	Buffer Zone 1		(02F020)	480
	Control Data Zone		(02F200)	3 072
	Buffer Zone 2		(02FE00)	512
Data	Data Zone	start 24,000 mm	(030000)	2 295 104
Lead-out	Buffer Zone 3	start 58,000 mm	(260540)	768
	Outer Disc Identification Zone		(260840)	256
	Guard Zone 2		(260940)	4 096
	Reserved Zone 4	start 58,053 mm	(261940)	4 096
	Outer Drive Test Zone		(262940)	12 288
	Outer Disc Test Zone		(265940)	2 048
	Guard Zone 3	start 58,246 mm end ≥ 58,500 mm	(266140)	24 400 nominal

16.1 Physical Sector Numbers (PSNs)

The first Physical Sector of the Data Zone shall have PSN (030000). The PSNs increase by 1 for each next Physical Sector in the whole Information Zone. (Figure 22).
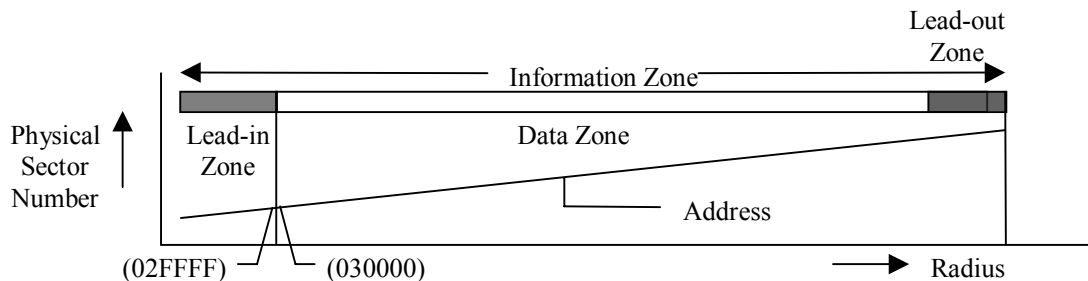
Figure 22 - Physical Sector numbering

17 Lead-in Zone

The Lead-in Zone is the innermost Zone of the Information Zone. It shall consist of the parts shown in Figure 23.

The Physical Sector Number of the first and last Physical Sector of each part is indicated in Figure 23 in hexadecimal and decimal notation and the number of Physical Sectors in each part are indicated in decimal notation.

A maiden disc does not have any data recorded in the Lead-in Zone. After finalization of the disc, the Lead-in Zone shall be recorded according to 17.1 to 17.12.

17.1 Initial Zone

The Main Data of the Data Frames in this Zone, when recorded, shall be set to all (00). The recording in the Initial Zone shall start at radius 22,6 mm max. This System Description does not specify the number of Physical Sectors in the Initial Zone.

Note: The Physical Sector Number of the first Physical Sector of the Data Zone is large enough so as to prevent a Physical Sector Number ≤ 0 to occur in the Initial Zone.

17.2 Inner Disc Test Zone

2 048 Physical Sectors reserved for disc manufacturer testing. This Zone shall be filled with Main Data set to (00).

17.3 Inner Drive Test Zone

12 288 Physical Sectors reserved for drive testing and OPC algorithm. This Zone shall be filled with Main Data set to (00).

17.4 Guard Zone 1

This Guard Zone is used as a protection for separating test writing zones from information zones containing user data. If recorded, this Zone shall be filled with Main Data set to (00). This zone shall contain 512 Physical Sectors.

17.5 Reserved Zone 1

4 096 Physical Sectors (= 256 ECC Blocks) reserved for Defect Management use. If not used all bytes shall be set to (00).

17.6 Reserved Zone 2

64 Physical Sectors reserved for Defect Management use. If not used all bytes shall be set to (00).

17.7 Inner Disc Identification Zone

256 Physical Sectors reserved for information agreed upon by the data interchange parties. Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 22) or recorded with all (00) Main Data. Each ECC Block in this Zone following one recorded with all (00) Main Data shall also be recorded with all (00) Main Data.

Physical Sector 173 183	Initial Zone all Physical Sectors with Main Data set to (00)	Physical Sector (02A47F)
Physical Sector 173 184	Inner Disc Test Zone 2 048 Physical Sectors	Physical Sector (02A480)
Physical Sector 175 231		Physical Sector (02AC7F)
Physical Sector 175 232	Inner Drive Test Zone 12 288 Physical Sectors	Physical Sector (02AC80)
Physical Sector 187 519		Physical Sector (02DC7F)
Physical Sector 187 520	Guard Zone 1 512 Physical Sectors with Main Data set to (00)	Physical Sector (02DC80)
Physical Sector 188 031		Physical Sector (02DE7F)
Physical Sector 188 032	Reserved Zone 1 4 096 Physical Sectors	Physical Sector (02DE80)
Physical Sector 192 127		Physical Sector (02EE7F)
Physical Sector 192 128	Reserved Zone 2 64 Physical Sectors	Physical Sector (02EE80)
Physical Sector 192 191		Physical Sector (02EEBF)
Physical Sector 192 192	Inner Disc Identification Zone 256 Physical Sectors	Physical Sector (02EEC0)
Physical Sector 192 447		Physical Sector (02EFBF)
Physical Sector 192 448	Reserved Zone 3 64 Physical Sectors	Physical Sector (02EFC0)
Physical Sector 192 511		Physical Sector (02EFFF)
Physical Sector 192 512	Reference Code Zone 32 Physical Sectors	Physical Sector (02F000)
Physical Sector 192 543		Physical Sector (02F01F)
Physical Sector 192 544	Buffer Zone 1 480 Physical Sectors with Main Data set to (00)	Physical Sector (02F020)
Physical Sector 193 023		Physical Sector (02F1FF)
Physical Sector 193 024	Control Data Zone 3 072 Physical Sectors	Physical Sector (02F200)
Physical Sector 196 095		Physical Sector (02FDFF)
Physical Sector 196 096	Buffer Zone 2 512 Physical Sectors	Physical Sector (02FE00)
Physical Sector 196 607		Physical Sector (02FFFF)
Physical Sector 196 608	Data Zone	Physical Sector (030000)

Figure 23 - Lead-in Zone

17.8   Reserved Zone 3

64 Physical Sectors reserved for Defect Management use. If not used all bytes shall be set to (00).

17.9   Reference Code Zone

The recorded Reference Code Zone shall consist of the 32 Physical Sectors from two ECC Blocks which generate a specific Channel bit pattern on the disc. This shall be achieved by setting to (AC) all 2 048 Main Data bytes of each corresponding Data Frame. Moreover, no scrambling shall be applied to these Data Frames, except to the first 160 Main Data bytes of the first Data Frame of each ECC Block.

17.10   Buffer Zone 1

This Zone shall consist of 480 Physical Sectors from 30 ECC Blocks. The Main Data of the Data Frames in this Zone shall be set to all (00).

17.11 Control Data Zone

This Zone shall consist of 3 072 Physical Sectors from 192 ECC Blocks. The content of the 16 Physical Sectors of each ECC Block is repeated 192 times, unless specified otherwise. The structure of a Control Data Block shall be as shown in Figure 24.

Physical format information
2 048 bytes
Disc manufacturing information
2 048 bytes
Content provider information
14 × 2 048 bytes

Figure 24 - Structure of a Control Data Block

17.11.1 Physical format information

This information shall comprise the 2 048 bytes shown in Table 8. It contains disc and format information.

Table 8 - Physical format information

Byte number	Content	Number of bytes
0	Disc Category and Version Number	1
1	Disc size	1
2	Disc structure	1
3	Recording density	1
4 to 15	Data Zone allocation	12
16	General Flag bits	1
17	Disc Application Code	1
18	Extended Information Indicators	1
19 to 26	Disc Manufacturer ID	8
27 to 29	Media Type ID	3
30	Product revision number	1
31	number of Physical format information bytes in use in ADIP up to byte 63	1
32 to 63	Basic write strategy parameters	32
64 to 95	Extended Information block 0	32
96 to 127	Extended Information block 1	32
128 to 159	Extended Information block 2	32
160 to 191	Extended Information block 3	32
192 to 223	Extended Information block 4	32
224 to 255	Extended Information block 5	32
256 to 2 047	Reserved - All (00)	1 792

The information in bytes 0 to 255 are copied from the ADIP auxiliary data during initialization of the disc and may be modified during use to reflect the actual status of the disc (e.g. the actual end of the Data Zone). All 256 bytes have the same definitions and contents as the Physical format information defined in Table 3 and 14.4.2, except the following bytes:

Byte 0 - Disc Category and Version Number

Bits b_7 to b_4 same as 14.4.2

Bits b_3 to b_0 same as 14.4.2

     Temporarily drives can set bits b_7 to b_0 to other values in order to increase the compatibility.

Byte 1 - Disc size and maximum transfer rate

Bits b_7 to b_4 same 14.4.2

Bits b_3 to b_0 shall specify the maximum read transfer rate.

     These bits may be set to one of the following values (depending on the maximum read-out speed needed by the application):
     0000: specify a maximum transfer rate of 2,52 Mbits/s (see note at 27.3)
     0001: specify a maximum transfer rate of 5,04 Mbits/s (see note at 27.3)
     0010: specify a maximum transfer rate of 10,08 Mbits/s
     1111: specify no maximum transfer rate is specified.
     All other combinations are reserved and shall not be used.

Bytes 4 to 15 - Data Zone allocation

Bytes 4 to 8   same as 14.4.2

Bytes 9 to 11   in the first 16 ECC Blocks of the Control Data Zone:

     shall specify the Sector Number of the last Physical Sector of the Recorded part of the Data Zone.

     in the remaining 176 ECC Blocks of the Control Data Zone:

     shall all be set to the Sector Number of the last Physical Sector of the Recorded part of the Data Zone, or shall all be set to (26053F) to specify PSN 2 491 711 as the last possible Physical Sector of the Data Zone (for 80 mm disc see Annex A).

Bytes 12 to 15   same as 14.4.2

Byte 16 – General Flag bits

Bit b_7 same as 14.4.2

Bit b_6 same as 14.4.2

Bit b_5 shall specify if Buffer Zone 2 in the Lead-in Zone contains VCPS related information,
     shall be set to 0,   indicating no VCPS related information is present in Buffer Zone 2,
     shall be set to 1,   indicating Buffer Zone 2 contains VCPS related information as defined in the VCPS System Description (see clause 3).

Bits b_4 to b_0 same as 14.4.2

Bytes 256 to 2 047 - Reserved - All (00)

All remaining bytes are reserved and shall be set to all (00).

17.11.2   **Disc manufacturing information**

This System Description does not specify the format and the content of these 2 048 bytes. They shall be ignored in interchange.

17.11.3   Content provider information

These 28 672 bytes shall be set to all (00).
Under no circumstance may data received from the host be recorded in this field.

Circumvention: Recorders and recording drives shall be considered as circumvention devices when these are produced to record, or can easily be modified to record, in any manner, a user-defined number in this field.

17.12   Buffer Zone 2

This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description (see clause 3). If no VCPS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

18   Data Zone

2 295 104 Physical Sectors of user data area (for 80 mm disc see Annex A).

The start radius of the Data Zone is determined by the location of Physical ADIP Address (00C000) and the maximum end radius is determined by the location of Physical ADIP Address (098150) (see 14.4.1.1, bit 2 to 23 and 13.7.1).

19   Lead-out Zone

The Lead-out Zone is the outermost zone of the Information Zone. It shall consist of the parts specified in Figure 25.

The Physical Sector Number of the first and the last Physical Sector of each part is indicated in Figure 25 in hexadecimal and decimal notation and the number of Physical Sectors in each part is indicated in decimal notation. (for 80 mm disc see Annex A)

	Data Zone	
---		---
Physical Sector 2 491 712	Buffer Zone 3	Physical Sector (260540)
	768 Physical Sectors	
Physical Sector 2 492 479	with Main Data set to (00)	Physical Sector (26083F)
Physical Sector 2 492 480	Outer Disc Identification Zone	Physical Sector (260840)
	256 Physical Sectors	
Physical Sector 2 492 735		Physical Sector (26093F)
Physical Sector 2 492 736	Guard Zone 2	Physical Sector (260940)
	4 096 Physical Sectors	
Physical Sector 2 496 831	with Main Data set to (00)	Physical Sector (26193F)
Physical Sector 2 496 832	Reserved Zone 4	Physical Sector (261940)
	4 096 Physical Sectors	
Physical Sector 2 500 927	with Main Data set to (00)	Physical Sector (26293F)
Physical Sector 2 500 928	Outer Drive Test Zone	Physical Sector (262940)
	12 288 Physical Sectors	
Physical Sector 2 513 215		Physical Sector (26593F)
Physical Sector 2 513 216	Outer Disc Test Zone	Physical Sector (265940)
	2 048 Physical Sectors	
Physical Sector 2 515 263		Physical Sector (26613F)
Physical Sector 2 515 264	Guard Zone 3	Physical Sector (266140)
	nominal 24 400 Physical Sectors	
Physical Sector 2 539 663	with Main Data set to (00)	Physical Sector (26C08F)

Figure 25 - Lead-out Zone

19.1   Buffer Zone 3

This recorded Zone shall consist of 768 Physical Sectors. The start location of Buffer Zone 3 is (260540) (for 80 mm disc see Annex A). The Main Data of the Data Frames in this Zone shall be set to all (00).

19.2   Outer Disc Identification Zone

256 Physical Sectors reserved for information agreed upon by the data interchange parties. Each set of 16 Physical Sectors from one ECC Block is either a Disc Control Block (DCB) (see clause 22) or recorded with all (00) Main Data. The contents of this Zone shall be equivalent to the contents of the Inner Disc Identification Zone.

19.3   Guard Zone 2

This Guard Zone is used as a protection for separating test writing zones from information zones containing user data. This Zone shall be filled with Main Data set to (00). This zone shall contain 4 096 Physical Sectors.

19.4   Reserved Zone 4

4 096 Physical Sectors are reserved and shall be set all (00).

19.5   Outer Drive Test Zone

12 288 Physical Sectors reserved for drive testing and OPC algorithm.

19.6   Outer Disc Test Zone

2 048 Physical Sectors reserved for disc manufacturer testing.

19.7   Guard Zone 3

This Zone shall be filled with Main Data set to (00) or may be left unrecorded.

20   Assignment of Logical Sector Numbers (LSNs)

Logical Sector Numbers (LSNs) shall be assigned contiguously increasing by one from LSN 0, starting from the first PSN (030000) to the end of the Data Zone (see also Annex J).

21 Formatting

The disc shall be considered fully formatted if all areas in the Information Zone have been recorded. The Main data bytes in the ECC blocks can contain relevant data or can be set to dummy data (all bytes (00)). All ECC blocks, including those with dummy data, shall comply with clause 13.

The disc shall be considered partially formatted if at least the Inner Disc Test Zone, the Inner Drive Test Zone, the Guard Zone 1, the Reserved Zone 1, the Reserved Zone 2, the Inner Disc Identification Zone, the Reserved Zone 3, the Reference Code Zone, the Buffer Zone 1, the Control Data Zone and the Buffer Zone 2 in the Lead-in Zone have been recorded.
To indicate the status of the disc, the Disc Identification Zones shall contain a Formatting Disc Control Block (FDCB) (see 22.2).

Note: To enable data retrieval by DVD - Read-Only drives, the disc shall be formatted or recorded sequentially.

Formatting can be done in two different ways:

1) Pre-formatting, which is the conventional way of formatting used for many storage media. After the pre-formatting process, the disc is fully formatted. User Data shall not be recorded to the disc until the pre-formatting process is complete.
This process consists of the following steps:

– write Lead-in Zone
– write Data Zone
– write Lead-out Zone
– verify the Data Zone (optional)

2) Background formatting, which is a formatting process that runs in the background during use of the disc on a recorder. After the Background formatting process, the disc is fully formatted. User Data may be recorded to the disc during the Background formatting process. The disc may be interchanged at any time after the first step.
This process consists of the following steps:

– Initialization
– De-icing
– Finalization
– Verification

Initialization shall always be applied to a maiden disc, while the other steps are optional.

A third way of using the disc is
3) Sequential recording without formatting, where the disc is recorded by appending data to the end of the Data Zone.

21.1 Pre-formatting

If Pre-formatting is applied, this shall be done before any User Data is recorded onto the disc.
The Inner Disc Identification Zone and the Outer Disc Identification Zone shall contain an FDCB according to 22.2 indicating pre-formatting in progress.
All other Zones shall be recorded according to clause 17, 18 and 19.

After fully formatting the disc and before ejecting the disc, the drive shall update the FDCB.

21.1.1 Verification

Optionally the Data Zone can be certified. During this process every ECC Block in the Data Zone is checked for correctness.

21.2 Background formatting

Because the Pre-formatting process can be rather time consuming, and the user may want to use a blank disc immediately, Background formatting can be used instead of Pre-formatting. During the Background formatting process only a minimum amount of data will be recorded onto the disc, after which the disc can be used by the application. A disc on which a Background formatting process is active, may be formatted further by the recorder in the background during the moments that the application is not accessing the disc. Recording of User Data into previously unrecorded areas shall be considered formatting of that area.

21.2.1 Initialization

It is recommended that the Background formatting process starts with recording the Inner Disc Test Zone, the Inner Drive Test Zone, the Guard Zone 1, the Reserved Zone 1, the Reserved Zone 2, the Inner Disc Identification Zone, the Reserved Zone 3, the Reference Code Zone, the Buffer Zone 1, the Control Data Zone and the Buffer Zone 2 in the Lead-in Zone (see Table 7). In any case, these areas shall be recorded before the disc is ejected.

The Inner Disc Identification Zone shall contain an FDCB according to the definitions in 22.2.
All other Zones shall be recorded according to clause 17.

Optionally the Buffer Zone 3, the Outer Disc Identification Zone, and the Guard Zone 2 in the Lead-out Zone can be recorded.

After initialization the disc can be released for the application.

21.2.2 De-icing

De-icing is the process of recording all ECC blocks in the Data Zone. During the de-icing phase, unrecorded areas in the Data Zone shall be filled with ECC blocks containing all (00) bytes or with User Data when requested. When the de-icing process is activated on a partially formatted disc with a Temporary Lead-out, the Temporary Lead-out shall be overwritten with ECC blocks with bits b_{27} to b_{26} in the ID field of the Data Frames set to ZERO ZERO, indicating Data Zone (see 21.3).

All recorded areas shall be registered in the Formatting bitmap of a Formatting Disc Control Block (FDCB) in the Inner (and Outer) Disc Identification Zone. During the time intervals when the drive is idle, the De-icing process, controlled by the drive, can proceed in the background. When the application requests disc access, the De-icing process is suspended and the control of the disc is returned to the application. Application requested writes to previously unrecorded areas shall be registered in the FDCB. During background De-icing the drive should keep the FDCB updated. When an eject is requested during background De-icing, the drive may add a Temporary Lead-out Zone immediately following the last written ECC Block in the Data Zone (no unrecorded areas shall be present between the Lead-in Zone and such Temporary Lead-out Zone) according to the rules in 21.3 and the drive shall update the FDCB before ejecting the disc.

21.2.3 Finalization

When the De-icing process has finished and all areas in the Data Zone have been recorded, the drive shall add the Lead-out Zone according to clause 19.

The Outer Disc Identification Zone shall contain the same DCBs as the Inner Disc Identification Zone (see clause 22).

The Lead-in Zone shall be finished by adding the Initial Zone according to clause 17.

21.2.4 Verification (optional)

Verification is the process of reading and checking all ECC blocks in the Data Zone. If an ECC block is found unreliable, this block can be replaced using a Defect Management system.

The Last Verified Address (LVA) pointer in the Formatting Disc Control Block (FDCB) in the Inner and Outer Disc Identification Zone shall register the area that has been checked. During the time intervals when the disc is idle, the Verification process, controlled by the drive, can proceed in the background. When the application requests disc access, the Verification process is suspended and the control of the disc is returned to the application. During background Verification the drive should keep the FDCB updated. When an eject is requested during background Verification, the drive shall update the FDCB before ejecting the disc.

21.3 Sequential recording without formatting

If the disc is used for contiguously sequential recording only, a Temporary Lead-out Zone immediately following the last recorded User Data should be recorded before ejecting the disc. The application can write additional data to the disc by overwriting the Temporary Lead-out Zone with User Data immediately followed by a new Temporary Lead-out Zone.

When a disc is going to be used for sequential recording without formatting, it shall be initialized in the same way as for Background formatting (see 21.2.1) and as long as there are unrecorded areas, the FDCB shall be used in the same way as during the De-icing process (see 21.2.2).
The Formatting status in the FDCB (see 22.2) shall be set to "partially formatted", the Last Written Address shall be set to the last PSN of the last contiguously recorded ECC Block in the Data Zone, and the Formatting Bitmap shall not be used. All other bits shall be set to their relevant meaning.

The Temporary Lead-out Zone shall fulfil the following rules:

- Bits b_{27} to b_{26} in the ID field of the Data Frames in the Temporary Lead-out Zone shall be set to ONE ZERO, indicating Lead-out Zone.

- The length of the Temporary Lead-out Zone shall be at least 64 ECC Blocks.
  For optimum compliance with the DVD – Read-Only standard (ECMA–267) the rules as given in Table 9 should be followed (for 80 mm disc see Annex A).

Table 9

Length of the Recorded part of the Data Zone (end radius)	End of the Temporary Lead-out Zone (radius)
less than 34,0 mm	35,0 mm min.
34,0 mm to 57,5 mm	end radius Data Zone + 1,0 mm min.
57,5 to 58,0 mm	58,5 mm

- The Temporary Lead-out Zone should be filled with all Main Data (00).

- Optionally, the 49[th] till the 64[th] ECC Block in the Temporary Lead-out may contain a Temporary Outer Disc Identification Zone according to the definitions as given in 19.2.

- It is allowed to have an unrecorded area between the end of the Temporary Lead-out Zone and Buffer Zone 3 located at radius 58 mm.

22 Disc Control Blocks

Disc Control ECC Blocks are provided as a structure on the disc to include additional information for interchange between the data interchange parties. DCBs are recorded in the Inner and Outer Disc Identification Zones. All DCBs shall have the same format for the first 40 data bytes. A special DCB is defined to reflect the status of the formatting process and to hold some general information.

Each type of DCB (i.e. with some specific Content Descriptor other than (00000000), (FFFFFFFE) or (FFFFFFFF)) shall occur only once in each of the Inner and Outer Disc Identification Zones.

22.1 General format of Disc Control Blocks

The Main Data of each Disc Control Block shall be according to Table 10.

Table 10 – General format of each Disc Control Block

Physical Sector of each DCB	Main Data BP	Description
0	D_0 to D_3	Content Descriptor
0	D_4 to D_7	Unknown Content Descriptor Actions
0	D_8 to D_{39}	Drive ID
0	D_{40} to $D_{2\,047}$	Content Descriptor Specific
1 to 15	$D_0 - D_{2\,047}$	Content Descriptor Specific

Bytes D_0 to D_3 – Content Descriptor

if set to (00000000)

the DCB is unused.
The Content Descriptor of all subsequent DCBs in this Inner or Outer Disc Identification Zone
shall be set to (00000000).
All remaining bytes, D_4 to $D_{2\,047}$ of Physical Sector 0 and D_0 to $D_{2\,047}$ of Physical Sector 1 to 15 in Table 10 shall be set to (00).

if set to (46444300)

this DCB shall be as defined in 22.2

if set to (57444300)

this DCB shall be as defined in 22.3

if set to (FFFFFFFE)

this DCB is bad and shall not be used.

Note: If any damaged DCB is replaced at an other location, the original location shall be overwritten with a DCB with the Content Descriptor set to (FFFFFFFE) and all remaining bytes set to (00). The List of DCBs (see 22.2, Physical Sector 0 / bytes D_{128} to D_{191}) shall be updated accordingly.

if set to (FFFFFFFF)

this DCB was previously used and is now available for reuse.
All remaining bytes, D_4 to $D_{2\,047}$ of Physical Sector 0 and D_0 to $D_{2\,047}$ of Physical Sector 1 to 15 in Table 10 shall be set to (00).

All other values for the Content Descriptor are reserved.

Each new DCB added to the Inner or the Outer Disc Identification Block shall be written at the first unused DCB (Content Descriptor = (00000000) or (FFFFFFFF)).

Each DCB with a Content Descriptor not set to (00000000), (FFFFFFFE) or (FFFFFFFF) in the Inner Disc Identification Zone shall have an identical DCB in the Outer Disc Identification Zone. The order of the DCBs in the Inner Disc Identification Zone is not necessarily the same as the order in the Outer Disc Identification Zone.

Bytes D_4 to D_7 – Unknown Content Descriptor Actions

These bits are provided to specify required actions when the content and use of the DCB are unknown to the drive (i.e. the content descriptor is not set to a known assigned value). These bytes form a field consisting of 32 individual bits.

Bits b_{31} to b_4 Reserved
These bits shall be set to all ZERO.

Bit b_3 DCB overwrite
if set to ONE, modifying the current DCB shall not be allowed,
else it shall be set to ZERO.

Bit b_2 Formatting
if set to ONE, reformatting of the disc shall not be allowed,
else it shall be set to ZERO.

Bit b_1 DCB read protect
if set to ONE, the information in this DCB is meant for use by the drive only and shall not be
transferred outside the drive,
else it shall be set ZERO.

Bit b_0 Data Zone write
if set to ONE, recording shall not be allowed in the Data Zone,
else it shall be set to ZERO.

Bytes D_8 to D_{39} Drive ID

Bytes D_8 to D_{39} shall contain a unique descriptor, identifying the drive that has last written the DCB. The format of this unique drive identifier shall be as follows:

- Bytes D_8 to D_{23} shall identify the manufacturer of the drive. This name shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

- Bytes D_{24} to D_{35} shall identify the model name/type number of the drive. This model name/type number shall be represented by characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

- Bytes D_{36} to D_{39} shall contain a unique serial number of the drive. The 4 bytes shall form one 32-bit binary number.

Bytes D_{40} to $D_{2\ 047}$ Content Descriptor Specific

Bytes specified by the format description for the DCB with the actual Content Descriptor value.

Physical Sector 1 to 15: Bytes D_0 to $D_{2\ 047}$ Content Descriptor Specific

Bytes specified by the format description for the DCB with the actual Content Descriptor value.

22.2   Format of the Formatting DCB (FDCB)

Both the Inner and Outer Disc Identification Zone shall contain one DCB reflecting the status of the disc. The FDCB in the Inner and Outer Disc Identification Zones shall be identical and have the content as defined in Table 11.

Table 11 – Format of the FDCB

Physical Sector of ECC block	Main Data byte position	Description	number of bytes
0	D_0 to D_3	Content Descriptor	4
0	D_4 to D_7	Unknown Content Descriptor Actions	4
0	D_8 to D_{39}	Drive ID	32
0	D_{40} to D_{43}	FDCB update count	4
0	D_{44} to D_{47}	Formatting status and mode	4
0	D_{48} to D_{51}	Last written address	4
0	D_{52} to D_{55}	Last verified address	4
0	D_{56} to D_{59}	Bitmap Start Address	4
0	D_{60} to D_{63}	Bitmap Length	4
0	D_{64} to D_{95}	Disc ID	32
0	D_{96} to D_{127}	Application dependent	32
0	D_{128} to D_{191}	List of DCBs	16×4
0	D_{192} to $D_{2\,047}$	Reserved and set to (00)	1 856
1 to 9	D_0 to $D_{2\,047}$	Formatting bitmap	9×2 048
10 to 15	D_0 to $D_{2\,047}$	Reserved and set to (00)	6×2 048

Physical Sector 0 / bytes D_0 to D_3 – Content Descriptor

these bytes identify the Formatting DCB and shall be set to (46444300), representing the characters "FDC" and the version number 0.

Physical Sector 0 / bytes D_4 to D_7 – Unknown Content Descriptor Actions

shall be set to (0000000D) indicating that if this DCB is not known to the system, the DCB shall not be overwritten, the disc shall not be reformatted, writing to the Data Zone shall not be allowed, while transferring the DCB information from the drive to the host computer is allowed.

Physical Sector 0 / bytes D_8 to D_{39} – Drive ID

these bytes shall contain the drive ID as specified in 22.1.

Physical Sector 0 / bytes D_{40} to D_{43} – FDCB update count

these bytes shall specify the total number of update operations of the FDCB. This field shall be set to (00000000) during the creation of the FDCB, and shall be incremented by one each time the FDCB is re-written.

Physical Sector 0 / byte D_{44} to D_{47} – Formatting status and mode

byte D_{44} – Formatting status flags

bits 7 to 6	bit 5	bits 4 to 0
Formatting status	Formatting open	Reserved

bits 7 to 6:

ZERO ZERO = disc is not formatted/recorded
ZERO ONE   = disc has been partially formatted/recorded
ONE ZERO   = disc has been fully formatted/recorded by user
ONE ONE   = disc has been fully formatted by manufacturer

bit 5:

ZERO = the FDCB on the disc reflects the actual status of the disc
ONE   = the Formatting process of the drive is active and the FDCB on the disc might not reflect the actual status of the disc

bits 4 to 0: reserved

byte D_{45} – Verification status flags

bits 7 to 6	bits 5 to 0
Verification status	Reserved

bits 7 to 6:

ZERO ZERO = disc is not verified
ZERO ONE   = disc has been partially verified
ONE ZERO   = disc has been fully verified by user
ONE ONE   = disc has been fully verified by manufacturer

bits 5 to 0: reserved

byte D_{46} – Recording status flags

bit 7	bits 6 to 5	bits 4 to 0
Lead-in status	Lead-out status	reserved

bit 7:

ZERO = Lead-in is recorded from address (02A480) to address (02FFFF)
ONE   = Lead-in is fully recorded

bits 6 to 5:

ZERO ZERO = No Lead-out has been recorded
ZERO ONE   = Temporary Lead-out has been recorded adjoining the actual last sector of the Data Zone
ONE ZERO   = Lead-out is recorded from address (260540) to address (26193F) (see clause 19 and 21.2.1) (for 80 mm disc see Annex A)
ONE ONE   = Lead-out is fully recorded adjoining the actual last sector of the Data Zone

bits 4 to 0: reserved

byte D_{47} – Reserved

set to (00)

Physical Sector 0 / bytes D_{48} to D_{51} – Last Written Address (LWA)

these 4 bytes shall indicate the last PSN of the last ECC Block of the contiguously recorded part of the Data Zone (not including any type of Lead-out Zone) starting from address (030000). (There shall be no unrecorded ECC Blocks between address (030000) and the LWA.) As long as the first ECC Block of the Data Zone is unrecorded, the LWA shall be set to (00000000), indicating that the LWA is not (yet) in use.

Note: some older drives might set the LWA to (0002FFFF) or (00030000) in case the first ECC Block is still unrecorded. Such a setting should be interpreted the same as (00000000).

After formatting has been finished, the LWA may also be set to (00000000).

Physical Sector 0 / bytes D_{52} to D_{55} – Last Verified Address (LVA)

these 4 bytes shall indicate the last PSN of the last ECC Block of the contiguously verified part of the Data Zone starting from address (030000). If not in use the LVA may also be set to (00000000).

Physical Sector 0 / bytes D_{56} to D_{59} – Bitmap Start Address (BSA)

these 4 bytes shall indicate the first PSN of the first ECC Block represented in the Formatting bitmap. This value shall be $\geq$ (00030000) and less than the Last Written Address.
They shall be set to (00000000) if the disc is fully Formatted or if the Formatting Bitmap is not used.

Physical Sector 0 / bytes D_{60} to D_{63} – Bitmap Length

these 4 bytes shall indicate the number of ECC Blocks represented in the Formatting bitmap. They shall be set to (00000000) if the disc is fully Formatted or if the Formatting Bitmap is not used.

Physical Sector 0 / bytes D_{64} to D_{95} – Disc ID

these 32 bytes shall be recorded with a random, statistically unique, 256-bit binary number at initialization of the disc.

Physical Sector 0 / bytes D_{96} to D_{127} – Application dependent

this field shall consist of 32 bytes and is reserved for use by the application to store information such as specific copy protection data. If this setting is not specified by the application, the bytes shall be set to (00).

Physical Sector 0 / bytes D_{128} to D_{191} – List of DCBs

To improve the robustness and the time to access the actually valid DCBs, it is recommended to store a list representing the 16 locations of the Inner/Outer Disc Identification Zone with the Content Descriptor of the DCB contained in each of these locations. This list shall be formatted according to Table 12.

Table 12 – Format of the List of DCBs

Physical Sector of ECC block	Main Data byte position	Description	number of bytes
0	D_{128} to D_{131}	Content Descriptor of DCB in location 0	4
0	D_{132} to D_{135}	Content Descriptor of DCB in location 1	4
0	:	:	:
0	$D_{(128+i\times4)}$ to $D_{(131+i\times4)}$	Content Descriptor of DCB in location i	4
0	:	:	:
0	D_{188} to D_{191}	Content Descriptor of DCB in location 15	4

bytes $D_{(128+i\times4)}$ to $D_{(131+i\times4)}$ – Content Descriptor of DCB in location i

each group of 4 bytes shall represent the Content Descriptor (see 22.1, bytes D_0 to D_3) of the DCB in the specified location in the Disc Identification Zone (Inner or Outer) holding this FDCB.
Location i in the Inner Disc Identification Zone shall be the ECC Block starting with PSN (02EEC0) + i×16.
Location i in the Outer Disc Identification Zone shall be the ECC Block starting with PSN (260840) + i×16.

The List of DCBs shall include the FDCB itself. The position of the FDCB is not restricted to location 0.
If not used the List of DCBs shall be set to all (00000000).
Note: older drives might not be able to maintain the information in the List of DCBs accurately.

Physical Sector 0 / bytes D_{192} to $D_{2\ 047}$ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 1 to 9 / bytes D_0 to $D_{2\ 047}$ – Formatting bitmap

Physical Sectors 1 to 9 of the FDCB contain a bitmap, where each bit reflects the recording status of one ECC block. Bit 0 (the lsb) of Main Data byte D_0 of Sector 1 represents the first ECC block, indicated by the Bitmap Start Address, bit 1 of Main Data byte D_0 of Sector 1 represents the next ECC block, following the ECC Block indicated by the Bitmap Start Address, etc. All remaining bits in Physical Sectors 1 to 9 following the bitmap shall be set to ZERO.

The ECC blocks in the bitmap are identified by a sequence number *i*, where *i* starts at 0 for the ECC block at the Bitmap Start Address. Bit *n* of Main Data byte D_m of Sector *k* represents the *i* th ECC block from the Bitmap Start Address:

$i = [(k\text{-}1)\times2\ 048+m]\times8+n,$ where $k = 1 .. 9,\ m = 0 .. 2\ 047, n = 0 .. 7$

Address of the first Physical Sector of the *i* th ECC block = Bitmap Start Address + i×16.

If the bit representing the *i* th ECC block is set to ONE, then the *i* th ECC block has not been recorded.

If the bit representing the *i* th ECC block is set to ZERO, then the *i* th ECC block has been recorded.

Physical Sector 10 to 15 / bytes D_0 to $D_{2\ 047}$ – Reserved

all bytes in these sectors shall be set to (00)

22.3   Format of the Write inhibit DCB (WDCB)

Both the Inner and Outer Disc Identification Zone may optionally contain a DCB reflecting the write protect status of the disc. The WDCB in the Inner and Outer Disc Identification Zones shall be identical and have the content as defined in Table 13.

Table 13 – Format of the WDCB

Physical Sector of ECC block	Main Data byte position	Description	number of bytes
0	D_0 to D_3	Content Descriptor	4
0	D_4 to D_7	Unknown Content Descriptor Actions	4
0	D_8 to D_{39}	Drive ID	32
0	D_{40} to D_{43}	WDCB update count	4
0	D_{44} to D_{47}	Write protect Actions	4
0	D_{48} to D_{63}	Reserved and set to (00)	16
0	D_{64} to D_{95}	WDCB Password	32
0	D_{96} to $D_{2\,047}$	Reserved and set to (00)	1 952
1 to 15	D_0 to $D_{2\,047}$	Reserved and set to (00)	15×2 048

Physical Sector 0 / bytes D_0 to D_3 – Content Descriptor

these bytes identify the Write inhibit DCB and shall be set to (57444300), representing the characters "WDC" and the version number 0.

Physical Sector 0 / bytes D_4 to D_7 – Unknown Content Descriptor Actions

shall be set to (0000000F) indicating that if this DCB is not known to the system, the DCB shall not be overwritten, the disc shall not be reformatted, writing to the Data Zone shall not be allowed, and transferring the DCB information from the drive to the host computer shall not be allowed.

Physical Sector 0 / bytes D_8 to D_{39} – Drive ID

these bytes shall contain the drive ID as specified in 22.1.

Physical Sector 0 / bytes D_{40} to D_{43} – WDCB update count

these bytes shall specify the total number of update operations of the WDCB. This field shall be set to (00000000) during the creation of the WDCB, and shall be incremented by one each time the WDCB is re-written.

Physical Sector 0 / byte D_{44} to D_{47} – Write protect Actions

These bits are provided to specify allowed and required actions. These bytes form a field consisting of 32 individual bits.

Bits b_{31} to b_8 Reserved
These bits shall be set to all ZERO.

Bit b_7 Write protect Change
if set to ZERO, the Write protect Status bits b_6 to b_0 may be modified,

if set to ONE and the password received from the host is the same as the WDCB Password in this DCB, the Write protect Status bits b_6 to b_0 may be modified,

if set to ONE and the password received from the host is the different from the WDCB Password in this DCB, the Write protect Status bits b_6 to b_0 shall not be modified.

Bits b_6 to b_2 Reserved
These bits shall be set to all ZERO.

Bits b_1, b_0 Write protect Status
if set to ONE/ONE recording in any area on the disc shall not be allowed,

if set to ONE/ZERO recording in the actual User Data Area[*] defined by an applied Defect Management System shall not be allowed,

if set to ZERO/ONE recording in the Data Zone on the disc (all of the area between the end of the Lead-in Zone and the start of the Lead-out Zone) shall not be allowed,

if set to ZERO/ZERO recording in all areas on the disc is allowed.

Physical Sector 0 / bytes D_{48} to D_{63} – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 0 / byte D_{64} to D_{95} – WDCB Password

These bytes shall contain a user defined password consisting of up to 32 characters from the G0 set + SPACE according to ECMA-43. Trailing bytes not used shall be set to (00).

If all bytes of the WDCB Password field are set to (00), then all 32 bits of the Write protect Actions field shall be set to ZERO.

If the WDCB Password field is set to all (FF), then the disc is permanently write protected and further recording on the disc shall not be allowed. Bits b_7, b_1 and b_0 of the Write protect Actions field shall be set to ONE.

Physical Sector 0 / bytes D_{96} to $D_{2\ 047}$ – Reserved

these bytes are reserved and shall be set to (00)

Physical Sector 1 to 15 / bytes D_0 to $D_{2\ 047}$ – Reserved

all bytes in these sectors shall be set to (00)

---

[*] Note: the "User Data Area" is the part of the Data Zone meant for storing the User Data in case a Defect Management System is applied. This means that possible Sparing and Table Areas of a Defect Management System located in the Data Zone of the disc can be excluded from the write inhibition, in which case the Defect Management System can stay enabled.

Section 5 - Characteristics of the groove

23　General

All recordings shall occur only in grooved areas. The groove centreline is deviated from the average track centreline with a phase modulated sinewave. Physical addressing information can be decoded from this phase modulated wobble.

The format of the groove information on the disc is defined in 14.4. Clause 25 specifies the requirements for the signals from grooves, as obtained when using the Reference Drive as defined in clause 9.

24　Method of testing

24.1　Environment

All signals in clause 25 shall be within their specified ranges with the disc in the test environment conditions defined in 8.1.1.

24.2　Reference Drive

All signals specified in clause 25 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests.

24.2.1　Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

24.2.2　Read power

The optical power incident on the read-out surface of the disc (used for reading the information) shall be 0,7 mW ± 0,1 mW.

24.2.3　Read channels

The drive shall have two read channels. Read Channel 1 gives a signal $(I_1 + I_2)$ related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal $(I_1 - I_2)$ related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in clause 9.

For measurement of the push-pull and track cross signals, the read channel signals shall be filtered by a 1st order LPF with a f_c(-3 dB) of 30 kHz.

For measurement of the wobble signal, the read channel signals shall be filtered by a 1st order Band Pass Filter with frequency range (-3 dB): 25 kHz, slope +20 dB/decade to 4,0 MHz, slope −20 dB/decade.

24.2.4　Tracking

During the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed 0,20 μm,

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed 0,022 μm

24.3   Definition of signals

All signals are linearly related to currents through a photo detector, and are therefore linearly related to the optical power falling on the detector.
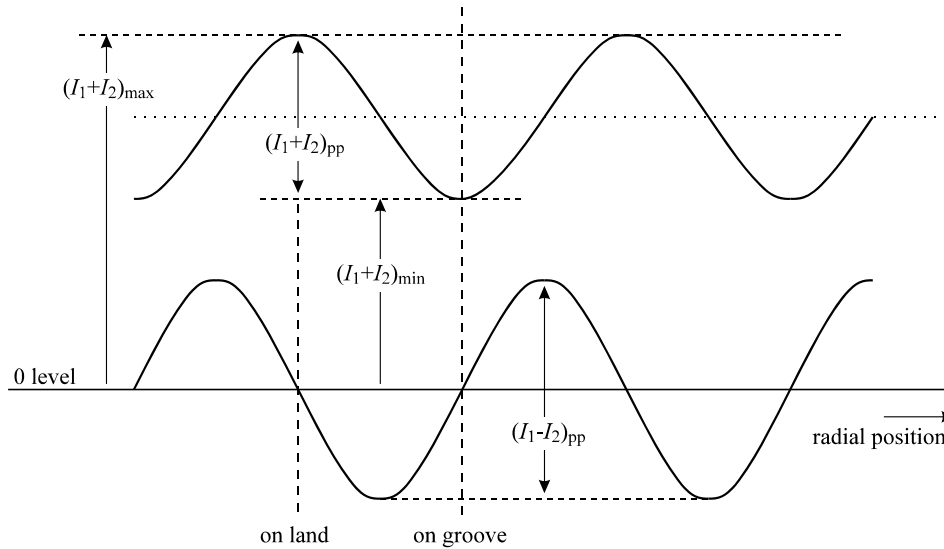
Figure 26 - Signals from grooves in the Read Channels when crossing the tracks

Push-pull signal

The push-pull signal is the filtered sinusoidal difference signal $(I_1 - I_2)$ in Read Channel 2, when the focus of the optical beam crosses the tracks. The signal can be used by the drive for radial tracking.

Track cross signal

The track cross signal is the filtered sinusoidal sum signal $(I_1 + I_2)$ in Read Channel 1, when the focus of the optical beam crosses the tracks.

Wobble signal

The wobble signal I_W is the filtered sinusoidal difference signal $(I_1 - I_2)$ in Read Channel 2, while the drive meets the minimum tracking requirement.

25 Characteristics of the groove signals

25.1 Phase depth

The phase depth of the groove shall not exceed 90°.

25.2 Push-pull signal

The peak-to-peak value of the push-pull signal PP shall meet the following requirements:

a) before recording: $0{,}28 \leq \dfrac{(I_1 - I_2)_{pp}}{\left[(I_1 + I_2)_{max} + (I_1 + I_2)_{min}\right]/2} \leq 0{,}56$

The max variation of the push-pull signal before recording shall be:

$$\frac{PP_{max} - PP_{min}}{PP_{max} + PP_{min}} < 0{,}15$$

b) after recording: $0{,}25 \leq \dfrac{(I_1 - I_2)_{pp}}{\left[(I_1 + I_2)_{max} + (I_1 + I_2)_{min}\right]/2} \leq 0{,}56$

c) Ratio of push-pull signal of unrecorded groove to push-pull signal of recorded groove shall be in the range of 0,75 to 1,25.

25.3 Track Cross signal

The Track Cross signal for the unrecorded disc shall meet the following requirement:

The $(I_1 + I_2)_{min}$ value shall be generated at the groove centre.

25.4 Normalized wobble signal

The deviation from the track centreline shall be measured by the normalized wobble signal. The amount of distance that the centre of the wobble groove deviates from the average track centreline can be calculated according to Annex L.

The wobble signal shall be measured in an empty track during the monotone wobble part, at locations where the amplitude is not enhanced due to the positive interference of the wobble from adjacent tracks.

The normalized wobble signal shall be

$$0{,}20 \leq \frac{I_{W,pp\text{-}min}}{(I_1 - I_2)_{pp}} \leq 0{,}30$$

At locations where the amplitude of the wobble signal is enhanced due to the positive interference of the wobble from adjacent tracks, the maximum wobble signal shall be

$$\frac{I_{W,pp\text{-}max}}{I_{W,pp\text{-}min}} \leq 2{,}6$$

25.5 Characteristics of the wobble

The average Narrow band SNR of the wobble signal before recording shall be greater than 45 dB. The measurement shall be made using a resolution bandwidth of 1 kHz.

The average Narrow band SNR of the wobble signal after recording shall be greater than 38 dB. The measurement shall be made using a resolution bandwidth of 1 kHz.

This page is intentionally left blank

Section 6 - Characteristics of the recording layer

26 Method of testing

The format of the information on the disc is defined in clause 13. Clause 27 specifies the requirements for the signals from recorded marks, as obtained when using the Reference Drive as defined in clause 9.

This clause 27 specifies the average quality of the rewritable information. Local deviations from the specified values, called defects, can cause tracking errors or errors in the Data fields. These errors are covered by Clause 29 and Section 7.

26.1 Environment

All signals in 27.2.2 to 27.2.7 shall be within their specified ranges with the disc in the test environment conditions defined in 8.1.1.

26.2 Reference Drive

All signals specified in 27.2.2 to 27.2.7 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests.

26.2.1 Optics and mechanics

The focused optical beam shall have the properties defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

26.2.2 Read power

The optical power incident on the read-out surface of the disc (used for reading the information) shall be 0,7 mW ± 0,1 mW.

26.2.3 Read channels

The drive shall have two read channels. Read Channel 1 gives a signal ($I_1 + I_2$) related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal ($I_1 - I_2$) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in clause 9.

For measurement of the push-pull and track cross signals, the read channel signals shall be filtered by a 1st order LPF with a f_c(-3 dB) of 30 kHz.

The signal from Read channel 1 is not equalized except when measuring jitter. The threshold level for binarizing the read signal shall be controlled to minimize the effects of mark and space size changes due to parameter variations during writing. Jitter measurements shall be made using the Read Channel 1 with the characteristics in Annex E.

26.2.4 Tracking

During recording and during the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed 0,20 μm,

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed 0,022 μm when running at the Reference velocity and shall not exceed 0,045 μm when running at a higher velocity.

Note: At high recording or playback velocities, advanced servo systems might be needed to achieve tracking errors below these maximum values.

26.2.5 Scanning velocity

Write tests are performed at each of the recording velocities defined in 14.4.2 with its related write strategy.

All read tests are performed at the Reference velocity.

26.3 Write conditions

Marks and spaces are written on the disc by pulsing a laser.

26.3.1 Write pulse waveform

The laser power is modulated according to the write pulse waveform given in Annex G.

A 3T to 14T is written by applying a multiple-pulse train of write pulses.

The recording power has three levels: the Write power (Pw), the Erase power (Pe), and the Cooling power (Pc), which are the optical powers incident at the entrance surface of the disc and used for writing marks and spaces. The values of these power levels shall be optimized according to Annex I.

The actual recording powers, Pw, Pe, and Pc shall be within 5 % of their optimum values.

26.3.2 Write power

The optimized recording powers, Pwo, Peo and Pco shall meet the following conditions

for the 3,3x (Lower) recording speed defined in 14.4.2.3.1:

$20,0 \text{ mW} \leq Pwo \leq 40,0 \text{ mW}$

$4,0 \text{ mW} \leq Peo \leq 16,0 \text{ mW}$

$0,1 \text{ mW} \leq Pco \leq 0,7 \text{ mW}$

for the 6x (Intermediate) recording speed defined in 14.4.2.3.1:

$20,0 \text{ mW} \leq Pwo \leq 45,0 \text{ mW}$

$4,0 \text{ mW} \leq Peo \leq 16,0 \text{ mW}$

$0,1 \text{ mW} \leq Pco \leq 0,7 \text{ mW}$

for the 8x (Upper) recording speed defined in 14.4.2.3.1:

$20,0 \text{ mW} \leq Pwo \leq 45,0 \text{ mW}$

$4,0 \text{ mW} \leq Peo \leq 16,0 \text{ mW}$

$0,1 \text{ mW} \leq Pco \leq 0,7 \text{ mW}$

26.4 Measurement conditions

The test for jitter shall be carried out on any group of five adjacent tracks, designated (m-2), (m-1), m, (m+1), (m+2), in the Information Zone of the disc. The jitter shall be measured on recordings made at all velocities specified in the Extended Information blocks defined under 14.4.2.3.

For measurement of jitter the system described in Annex E shall be used.

The Jitter shall be measured according to the following procedure:

Write random data on all five tracks 10 times each as specified in 26.3.1

Read the data of track m under the conditions specified in 26.2.

27 Characteristics of the recorded signals

The following signals shall be measured, after recording with the write conditions as specified in 26.3.1.

27.1 Channel bit length

The average Channel bit length over each RUN shall be

133,3 nm ± 1,4 nm

27.2 Definition of signals

All signals are linearly related to currents through a photo-diode detector, and are therefore linearly related to the optical power falling on the detector.

27.2.1 High frequency signals (HF)

The HF signal is obtained by summing the currents of the four elements of the photo detector as generated in Read Channel 1. These currents are modulated by the effects of the marks and spaces representing the information on the recording layer.

97-0002-A
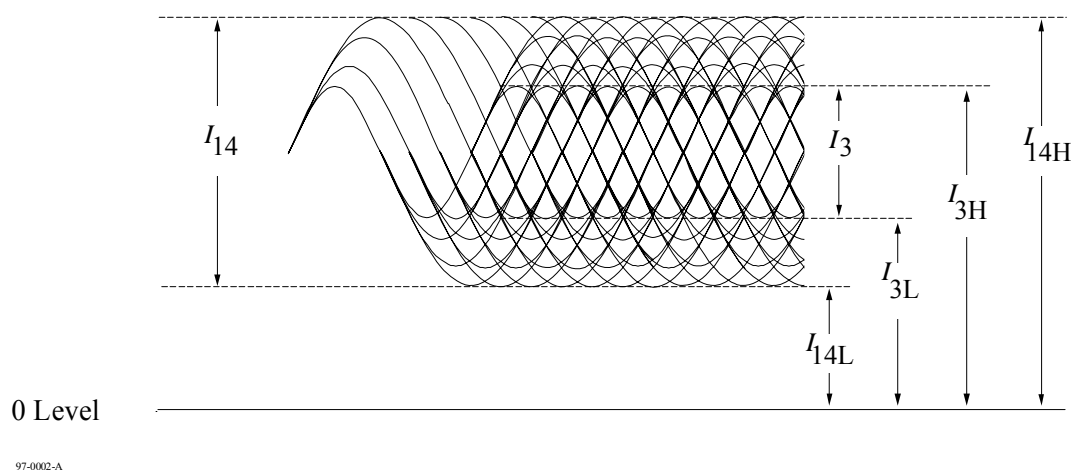
Figure 27 -Signals from spaces and marks in Read channel 1

27.2.2 Modulated amplitude

The modulated amplitude I_{14} is the peak-to-peak value of the HF signal generated by the largest mark and space lengths (see Figure 27). The peak value I_{14H} shall be the peak value of the HF signal before a.c. coupling. The modulated amplitude I_3 is the peak-to-peak value generated by the shortest mark and space lengths. The 0 Level is the signal level obtained from the measuring device when no disc is inserted. These parameters shall meet the following requirements under all conditions, also such as a different number of overwrites, and when recordings have been made at different speeds.

$$I_{14}\big/I_{14H} \geq 0,55$$

$$I_{3}\big/I_{14} \geq 0,15$$

Within one disc, $(I_{14Hmax} - I_{14Hmin})\big/I_{14Hmax} \leq 0,25$

Within one revolution, $(I_{14Hmax} - I_{14Hmin})\big/I_{14Hmax} \leq 0,15$

27.2.3 **Reflectance×Modulation product**

The Reflectance of the disc (see 12.3) multiplied by the Modulation (= normalized I_{14} modulated amplitude)

shall be $RxM = R_{14H} \times {I_{14}}/{I_{14H}}$, $RxM \geq 0,11$

27.2.4 **Signal asymmetry**

The signal asymmetry shall meet the following requirement: $-0,05 \leq \left[\dfrac{\dfrac{I_{14H}+I_{14L}}{2} - \dfrac{I_{3H}+I_{3L}}{2}}{I_{14}} \right] \leq +0,15$

27.2.5 **Normalized Slicing Level jump**

Between any 2 consecutive ECC Blocks, the Normalized Slicing Level (NSL) jump shall be:

$$\left| \frac{(I_{3H,2}+I_{3L,2})-(I_{3H,1}+I_{3L,1})}{(I_{3H,2}-I_{3L,2})+(I_{3H,1}-I_{3L,1})} \right| \leq 0,65 \ ,$$

where $I_{3H,1}$ and $I_{3L,1}$ are the I_3 levels just before the linking position
and $I_{3H,2}$ and $I_{3L,2}$ are the I_3 levels just after the linking position.

This requirement shall be fulfilled also after a different number of overwrites for the 2 ECC Blocks (up to 500 DOW cycles), and when the 2 ECC Blocks have been recorded at different speeds.

27.2.6 **Jitter**

Jitter is the standard deviation σ of the time variations of the binary read signal. This binary read signal is created by a slicer, after feeding the HF signal from the HF read channel through an equalizer and LPF (see Annex E). The jitter of the leading and trailing edges is measured relative to the PLL clock and normalized by the Channel bit clock period.

The jitter shall be measured at the Reference velocity using the circuit specified in Annex E.
The jitter measurement shall be using the conditions specified in 26.4.
The measured jitter shall not exceed 9,0 %.

27.2.6.1 **Overwrite stability**

The following test shall be applied to verify the stability of the overwrite capabilities of the disc after some storage time. For this purpose a band of at least 5 tracks shall be (over)written 10 times, at a velocity of 8x, with nominal recording powers and the write strategy parameters set to the values as defined in 14.4.2.3.1. Next the disc has to be stored at 55 °C ± 2 °C for 24 hours.

After 24 hours the original recorded tracks shall be overwritten once and the jitter is measured (jitter$_{10+1}$). A new, empty area of the disc, close to the original recording, shall be (over)written 11 times and also here the jitter is measured (jitter$_{11}$).
The difference in the measured jitter values shall be defined as $\Delta \text{jitter}^2 = \text{jitter}_{10+1}^2 - \text{jitter}_{11}^2$,

where: $\Delta \text{jitter} \leq 6,0 \ \%$.

Additionally the number of PI errors over any 8 consecutive ECC Blocks shall not exceed 280 (see 29.2).

27.2.7 **Track Cross signal**

The Track Cross signal is the filtered sinusoidal sum signal ($I_1 + I_2$) in Read Channel 1 when the focus of the optical beam crosses the tracks. The Track Cross signal shall meet the following requirement:

$$\frac{(I_1+I_2)_{\text{pp}}}{(I_1+I_2)_{\text{max}}} \geq 0,13$$

27.3 **Read stability**

When read with a read power of 0,8 mW at a temperature of 55 °C, all parameters specified in 27.2.2 to 27.2.7 shall be within their specified ranges after 1 000 000 repeated reads.

Note: Reading with the same read power at lower speeds than the reference speed might degrade the read stability.

28 Additional testing conditions

Recorded DVD+RW discs compliant with this DVD+RW HS System Description shall also fulfil the following basic signal specifications when measured with the Pick Up Head according to the DVD – Read-Only Standard (see ECMA-267).

28.1 Test environment

All conditions are the same as in 26.1 to 26.2.5. except for the following.

28.1.1 Optics

The focused optical beam used for reading data shall have the following properties:

a) Wavelength (λ)   650 nm $\pm$ 5 nm
b) Numerical aperture of the objective lens (NA)   0,60 $\pm$ 0,01

c) The objective lens shall be compensated for spherical aberrations caused by a parallel substrate with nominal thickness (0,6 mm) and nominal refractive index (1,55).

d) Wave front aberration   0,033 $\times \lambda$ rms max.

e) Light intensity at the rim of the pupil of the objective lens   60 % to 70 % of the maximum intensity in the radial direction and over 90 % in the tangential direction.

f) Polarization of the light   Circular

g) Read power   0,7 mW $\pm$ 0,1 mW

h) Relative Intensity Noise (RIN)* of laser diode   -134 dB/Hz max.

   *RIN (dB/Hz) = 10 log [(a.c. light power density / Hz) / d.c. light power]

28.2 Definition of signals

For the definition of the following signals see 27.2 and the underlying subclauses.

28.2.1 Modulated amplitude

$$\frac{I_{14}}{I_{14H}} \geq 0,55$$

$$\frac{I_3}{I_{14}} \geq 0,15$$

Within one disc, $\frac{(I_{14Hmax} - I_{14Hmin})}{I_{14Hmax}} \leq 0,33$ (with PBS)

Within one disc, $\frac{(I_{14Hmax} - I_{14Hmin})}{I_{14Hmax}} \leq 0,20$ (without PBS)

Within one revolution, $\frac{(I_{14Hmax} - I_{14Hmin})}{I_{14Hmax}} \leq 0,15$ (with PBS)

Within one revolution, $\frac{(I_{14Hmax} - I_{14Hmin})}{I_{14Hmax}} \leq 0,10$ (without PBS)

28.2.2 Signal asymmetry

$$-0,05 \leq \left[\frac{\frac{I_{14H} + I_{14L}}{2} - \frac{I_{3H} + I_{3L}}{2}}{I_{14}} \right] \leq +0,15$$

28.2.3 Jitter

The jitter shall be measured at the Reference velocity using the circuit specified in Annex E.
The jitter measurement shall be using the conditions specified in 26.4.
The measured jitter shall not exceed 9,0 %.

28.2.4 Track Cross signal

The Track Cross signal (see 24.3) shall meet the following requirement: $\dfrac{\left(I_1 + I_2\right)_{pp}}{\left(I_1 + I_2\right)_{max}} \geq 0{,}10$

28.2.5 Differential phase tracking error signal

The output currents of the four quadrants of the split photo detector shown in Figure 28 are identified by I_a, I_b, I_c, and I_d.

The differential phase tracking error signal shall be derived from the phase differences between the sum of the currents of diagonal pairs of photo detector elements when the light beam crosses the tracks:

{Phase $(I_a + I_c)$ - Phase$(I_b + I_d)$} , see Figure 29 and Annex F.

The phase difference signals shall be low-pass filtered with f_c(-3 dB) of 30 kHz.

This differential phase tracking error signal shall meet the following requirements (see Figure 29):

Amplitude

At the positive 0 crossing $\overline{\Delta t}/T$ shall be in the range 0,5 to 1,1 at 0,10 μm radial offset, where $\overline{\Delta t}$ is the average time difference derived from the phase differences between the sum of the currents of diagonal pairs of photo detector elements, and T is the Channel bit clock period .

Asymmetry (see Figure 29)

The asymmetry shall meet the following requirement: $\dfrac{\left|T_1 - T_2\right|}{\left|T_1 + T_2\right|} \leq 0{,}20$

where T_1 is the positive peak value of $\overline{\Delta t}/T$

and T_2 is the negative peak value of $\overline{\Delta t}/T$

97-0047-A
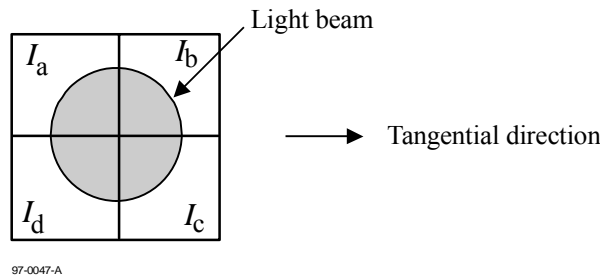
Figure 28 - Quadrant photo detector
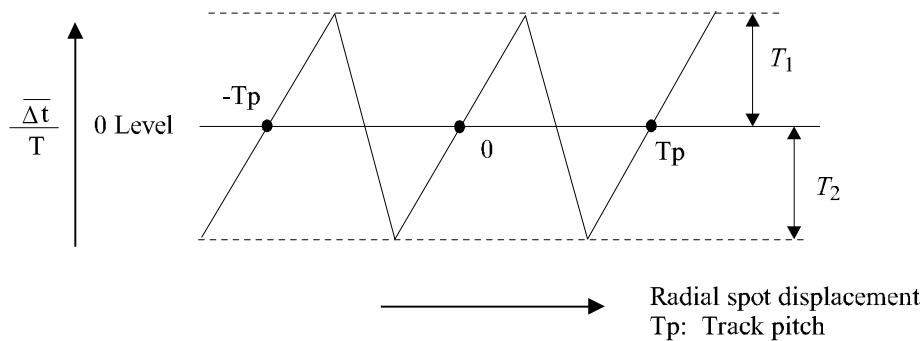
Figure 29 - Differential phase tracking error signal

28.2.6 **Tangential push-pull signal**

This signal shall be derived from the instantaneous level of the differential output $(I_a+I_d) - (I_b+I_c)$. It shall meet the following requirements, see Figure 30:

$$0 \leq \frac{\left[(I_a + I_d) - (I_b + I_c)\right]_{pp}}{I_{14}} \leq 0,9$$
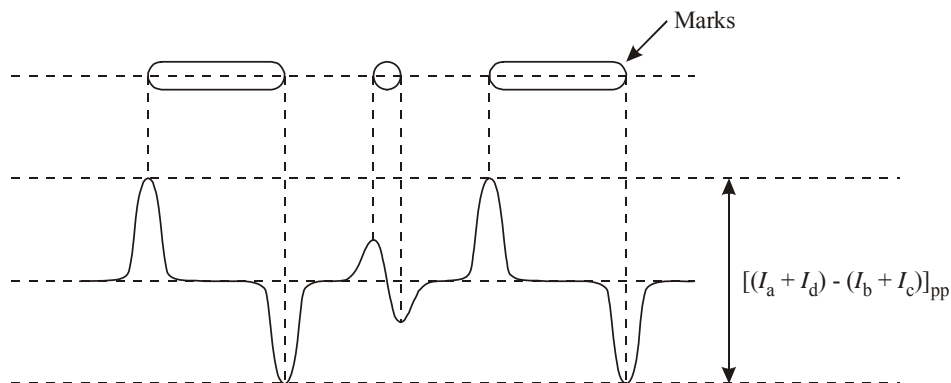
Figure 30 – Tangential push-pull signal

29 Quality of the recording layer

For the integrity of the data on the disc, the recording layer shall fulfil the following initial quality requirements.

29.1 Defects

Defects are air bubbles and black spots. Their diameter shall meet the following requirements:

- for air bubbles it shall not exceed 100 μm,

- for black spots causing birefringence it shall not exceed 200 μm,

- for black spots not causing birefringence it shall not exceed 300 μm.

In addition, over a distance of 80 mm in scanning direction of tracks, the following requirements shall be met:

- the total length of defects larger than 30 μm shall not exceed 300 μm,

- there shall be at most 6 such defects.

29.2 Data errors

A byte error occurs when one or more bits in a byte have a wrong value, as compared to their original recorded value.

A row of an ECC Block as defined in 13.3 that has at least 1 byte in error constitutes a PI error.

If a row of an ECC Block as defined in 13.3 contains more than 5 erroneous bytes, the row is said to be "PI-uncorrectable".

The disc shall be recorded with arbitrary data in one single uninterrupted writing action from the start of the Lead-in Zone until the end of the Lead-out Zone ("Disc-At-Once" mode).

During playback after the initial recording, the errors as detected by the error correction system shall meet the following requirements:

- in any 8 consecutive ECC Blocks the total number of PI errors before correction shall not exceed 280,

- in any ECC Block the number of PI-uncorrectable rows should not exceed 4.

This page is intentionally left blank

Section 7 - Characteristics of user data

30   Method of testing

Clause 31 describes a series of measurements to test conformance of the user data on the disc with this System Description. It checks the legibility of the user-written data. The data is assumed to be arbitrary. The data may have been written by any drive in any operating environment (see 8.1.2). The read tests shall be performed on the Reference Drive as defined in clause 9.

Whereas clause 26 disregards defects, clause 31 includes them as an unavoidable deterioration of the read signals. The severity of a defect is determined by the correctability of the ensuing errors by the error detection and correction circuit in the read channel defined below. The requirements in clause 31 defines a minimum quality of the data, necessary for data interchange.

30.1   Environment

All signals in 31.1 to 31.2 shall be within their specified ranges with the disc in any environment in the range of allowed operating environments defined in 8.1.2. It is recommended that before testing, the entrance surface of the disc shall be cleaned according to the instructions of the manufacturer of the disc.

30.2   Reference Drive

All signals specified in clause 31 shall be measured in the indicated channels of the Reference Drive as defined in clause 9. The drive shall have the following characteristics for the purpose of these tests:

30.2.1   Optics and mechanics

The focused optical beam shall have the properties already defined in 9.2 a) to i). The disc shall rotate as specified in 9.5.

30.2.2   Read power

The optical power incident on the entrance surface of the disc (used for reading the information) shall be 0,7 mW ± 0,1 mW.

30.2.3   Read channels

The drive shall have two read channels. Read Channel 1 gives a signal ($I_1 + I_2$) related to the total amount of light in the exit pupil of the objective lens. Read Channel 2 gives a signal ($I_1 - I_2$) related to the difference in the amount of light in the two halves of the exit pupil of the objective lens. These channels can be implemented as given in 9.3 and 9.6.

The signal from Read channel 1 is equalized and filtered before processing. The threshold level for binarizing the read signal shall be controlled to minimize the effects of mark and space size changes due to parameter variations during writing. For measurement of the disc quality as specified in clause 31, the equalizer, filter and slicer, and the characteristics of the PLL shall be the same as specified in Annex E for the jitter measurement.

30.2.4   Error correction

Correction of errors in the data bytes shall be carried out by an error detection and correction system based on the definition in 13.3.

30.2.5   Tracking

During the measurement of the signals, the axial tracking error between the focus of the optical beam and the recording layer shall not exceed 0,20 μm,

and the radial tracking error between the focus of the optical beam and the centre of a track shall not exceed 0,022 μm

31 Minimum quality of a Recording Unit

This clause specifies the minimum quality of the data of a Recording Unit as required for data interchange. The quality shall be measured on the Reference Drive as defined in clause 9 and Annex E.

A byte error occurs when one or more bits in a byte have a wrong value, as detected by the ECC and/or EDC circuits.

31.1 Tracking

The focus of the optical beam shall not jump tracks unintentionally.

31.2 User-written data

The user-written data in a Recording Unit as read in Read channel 1 shall not contain any byte errors that cannot be corrected by the error correction defined in 13.3. To relieve this requirement, a defect management system can be used, which autonomously replaces unreliable Recording Units (see clause 3).

Annex A   80 mm DVD+RW disc

(normative)

The DVD+RW HS Format also allows an 80 mm disc with capacities of 1,46 Gbytes and 2,92 Gbytes. All mechanical, physical and optical characteristics shall be equal to those of the 120 mm discs specified in this document, except for the following items:

see: **10.2 Overall dimensions**

The disc shall have an overall diameter d_1 = 80,00 mm ± 0,30 mm

see: **10.7 Information Zone**

The Information Zone shall extend from diameter d_6 to diameter

d_7 = 77,5 mm min.

This Zone consists of the Lead-in Zone, the Data Zone, and the Lead-out Zone.

see: **11.1 Mass**

The mass of the disc shall be in the range of 6,0 g to 9,0 g.

see: **11.2 Moment of inertia**

The moment of inertia of the disc, relative to its rotation axis, shall not exceed 0,010 g·m^2.

see: **11.3 Dynamic Imbalance**

The dynamic imbalance of the disc, relative to its rotation axis, shall not exceed 1,5 g·mm.

see: **14.1 Track shape**

The tracks shall be continuous in the Information Zone. The groove tracks shall start at a radius of 22,00 mm max. and end at a radius of 38,75 mm min.

see: **14.4.1.1 ADIP word structure, bits 2 to 23**

Physical ADIP Address (0379CC), which is the first address corresponding to the Lead-out Zone, shall be located at a radius ≤ 38,00 mm.

see: **14.4.2.1 General information - Bytes 0 to 31**

Byte 1 – Disc size and maximum transfer rate

Bits b_7 to b_4 shall specify the disc size, they shall be set to 0001, indicating a 80 mm disc

Bytes 4 to 15 – Data Zone allocation

Bytes 9 to 11 shall be set to (0DE72F) to specify PSN 911 151 as the last possible Physical Sector of the Data Zone.

see: **16 Layout of the Information Zone**

Table 7 – Layout of the Information Zone of a fully formatted disc

	Description	Nominal radius in mm	PSN of the first Physical Sector	Number of Physical Sectors
Lead-in	all the same as 120 mm disc	---	---	---
Data	Data Zone	start 24,000 mm	(030000)	714 544
Lead-out	Buffer Zone 3	start 38,000 mm	(0DE730)	768
	Outer Disc Identification Zone		(0DEA30)	256
	Guard Zone 2		(0DEB30)	4 096
	Reserved Zone 4	start 38,082 mm	(0DFB30)	4096
	Outer Drive Test Zone		(0E0B30)	12 288
	Outer Disc Test Zone		(0E3B30)	2 048
	Guard Zone 3	start 38,375 mm end ≥ 38,500 mm	(0E4330)	7 936 nominal

see: **17.11.1 Physical format information**

Bytes 4 to 15 – Data Zone allocation

Bytes 9 to 11   in the first 16 ECC Blocks of the Control Data Zone:

shall specify the Sector Number of the last Physical Sector of the Recorded part of the Data Zone.

in the remaining 176 ECC Blocks of the Control Data Zone:

shall all be set to the Sector Number of the last Physical Sector of the Recorded part of the Data Zone, or shall all be set to (0DE72F) to specify PSN 911 151 as the last possible Physical Sector of the Data Zone.

see: **18 Data Zone**

714 544 Physical Sectors of user data area.

The start radius of the Data Zone is determined by the location of Physical ADIP Address (00C000) and the maximum end radius is determined by the location of Physical ADIP Address (0379CC) (see 14.4.1.1, bit 2 to 23 and 13.7.1)

see: **19 Lead-out Zone**

	Data Zone	
---		---
Physical Sector 911 152	Buffer Zone 3 768 Physical Sectors	Physical Sector (0DE730)
Physical Sector 911 919		Physical Sector (0DEA2F)
Physical Sector 911 920	Outer Disc Identification Zone 256 Physical Sectors	Physical Sector (0DEA30)
Physical Sector 912 175		Physical Sector (0DEB2F)
Physical Sector 912 176	Guard Zone 2 4 096 Physical Sectors with Main Data set to (00)	Physical Sector (0DEB30)
Physical Sector 916 271		Physical Sector (0DFB2F)
Physical Sector 916 272	Reserved Zone 4 4 096 Physical Sectors	Physical Sector (0DFB30)
Physical Sector 920 367		Physical Sector (0E0B2F)
Physical Sector 920 368	Outer Drive Test Zone 12 288 Physical Sectors	Physical Sector (0E0B30)
Physical Sector 932 655		Physical Sector (0E3B2F)
Physical Sector 932 656	Outer Disc Test Zone 2 048 Physical Sectors	Physical Sector (0E3B30)
Physical Sector 934 703		Physical Sector (0E432F)
Physical Sector 934 704	Guard Zone 3 7 936 Physical Sectors with Main Data set to (00)	Physical Sector (0E4330)
Physical Sector 942 639		Physical Sector (0E622F)

Figure 25 – Lead-out Zone

see: **19.1 Buffer Zone 3**

The start location of Buffer Zone 3 is (0DE730).

see: **21.3 Sequential recording**

Table 9

Length of the Recorded part of the Data Zone (end radius)	End of the Temporary Lead-out Zone (radius)
less than 34,0 mm	35,0 mm min.
34,0 mm to 37,5 mm	end radius Data Zone + 1,0 mm min.
37,5 to 38,0 mm	38,5 mm

It is allowed to have an unrecorded area between the end of the Temporary Lead-out Zone and Buffer Zone 3 located at radius 38 mm.

see: **22.2 Format of the FDCB**

Byte D_{46} – Recording status flag

bit 6 to bit 5:

ZERO ZERO = No Lead-out has been recorded
ZERO ONE = Temporary Lead-out has been recorded
ONE ZERO = Lead-out is recorded from address (0DE730) to address (0DFB2F)
                    (see clause 19 and 21.2.1)
ONE ONE   = Lead-out is fully recorded adjoining the actual last sector of the Data Zone

This page is intentionally left blank

Annex B   Structure for Extended format information in the Data Zone

(normative)

The ADIP Aux Frames in the Data Zone may be used to store information needed to support specific applications, such as e.g. encryption/decryption keys needed for a copy-protection system. This annex only specifies the general structure for such information.

B.1   Extended format information

The Extended Format Information consists of a table of contents (EFI TOC) and up to 16 distinct regions that contain additional format information. The EFI TOC defines the location and contents of the regions contained in the Extended Format Information, see B.1.1. The EFI TOC shall be stored in the ADIP Aux Frames (see 14.4.1.1) in the Data Zone, starting at the ADIP word that has Physical ADIP Address (00C000). The regions of the Extended Format Information shall be located in the ADIP Aux Frames in the Data Zone and/or shall be present as pre-recorded areas in the main data channel. Each region contains one or more copies of a data block of a particular type, as indicated in the EFI TOC.

Figure B.1 schematically shows an example lay-out, based on the VCPS copy-protection system, with the EFI TOC and the VCPS-defined regions that are contained in the ADIP Aux Frames in the Data Zone. The EFI TOC consists of 8 consecutive copies of an ETOC block, where each ETOC block contains the complete EFI TOC information (see B.1.1). The VCPS-defined hash region contains one or more copies of the DKB hash value, as specified in the EFI TOC. The VCPS-defined DKB region contains one or more copies of the DKB, as specified in the EFI TOC. Gaps may exist between any two regions. All bytes in the ADIP Aux Frames in the gaps shall be set to (00).
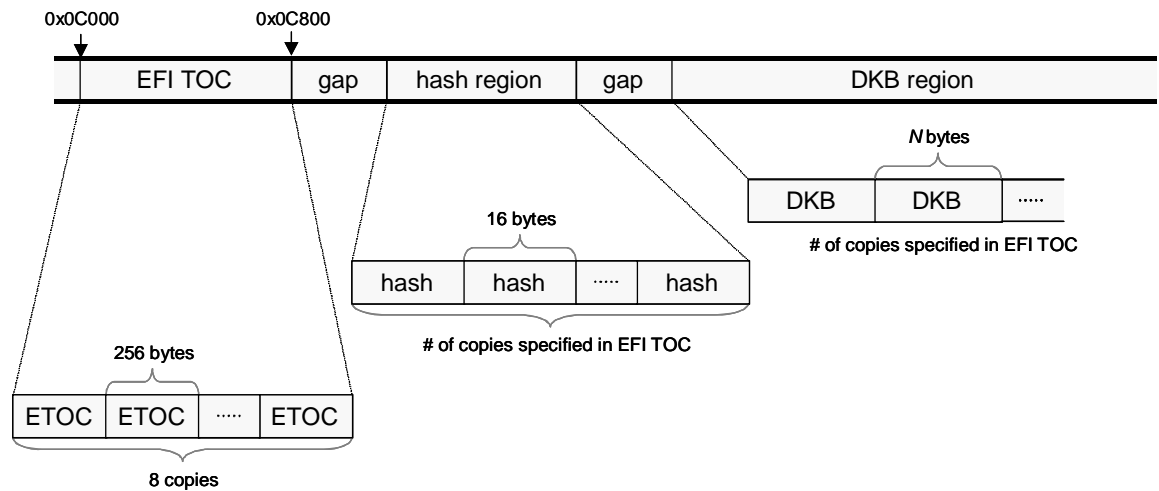
Figure B.1 – Example lay-out of Extended format information in ADIP

B.1.1   EFI TOC

The EFI TOC starts at the ADIP word that has Physical Address (00C000). The length of the EFI TOC is 8 ADIP Aux Frames, which is equivalent to 2048 consecutive ADIP words. As shown in Figure B.1, the EFI TOC consists of 8 consecutive copies of an ETOC block. The ETOC block consists of at most 16 Region Descriptors, as defined in Figure B.2. The combined size of all Region Descriptors contained in the ETOC block shall be no more than 256 bytes. Remaining bytes shall be set to all zeros, such that the size of the ETOC block is exactly 256 bytes.

Bit Byte	7	6	5	4	3	2	1	0
0 :				Region Descriptor #1				
: :				Region Descriptor #2				
:				:				
: :				Region Descriptor #n				
:				(00)				
:				:				
255				(00)				

Figure B.2 – ETOC block

Region Descriptor #i: Region Descriptor #*i* contains information with respect to the *i*-th region of the Extended Format Information ($1 \leq i \leq n \leq 16$). A Region Descriptor consists of a Basic Region Descriptor followed by zero or more Extended Region Descriptors. The format of a Basic Region Descriptor is defined in Figure B.3. The format of an Extended Region Descriptor is defined in Figure B.4.

Bit Byte	7	6	5	4	3	2	1	0
0	(msb)							
1				Region Type Identifier				
2								(lsb)
3	Extent			Version number				
4	(msb)							
5				Region Start Address				(lsb)
6	(msb)							
:				Data Block Size				
9								(lsb)
10				Repeat Count				
11				Reserved				Private
12	(msb)							
:				Alternative Location				
15								(lsb)

Figure B.3 – Basic Region Descriptor

Region Type Identifier: The type of the data block that is contained in the region. Data blocks stored in different regions having the same Region Type Identifier shall be identical.

Extent: The Extent bit shall indicate if this Basic Region Descriptor is followed by an Extended Region Descriptor, as follows:
0: This Basic Region Descriptor is not followed by an Extended Region Descriptor.
1: This Basic Region Descriptor is followed by an Extended Region Descriptor.

Version Number: The revision of the data block type that is contained in the region.

Region Start Address: If the data block is stored in the ADIP Aux Frames, the Region Start Address is given as the Physical ADIP Address of the ADIP word that contains the first byte of the data block, divided by 256. The Region Start Address shall be greater than or equal to (00C8). If the data block is not stored in the ADIP Aux Frames, the Region Start Address shall be zero. In that case the Alternative Location shall be non-zero and specify the location of the data block in the main data channel.

Data Block Size: The size in bytes of a single copy of the data block in the region. The Data Block Size shall be set to zero if the data block is not contained in the ADIP Aux Frames.

Repeat Count: The number of consecutive copies of the data block that are contained in the region. If the data block is stored in the ADIP Aux Frames and the region extends through the end of the Disc, Repeat Count shall be set to 0. The Repeat Count shall be set to zero if the data block is not contained in the ADIP Aux Frames.

Reserved: All reserved bits shall be set to '0'.

Private: The Private bit shall indicate if a Drive is permitted to output the contents of the region, as follows:
    0: A Drive is permitted to output the contents of the region.
    1: A Drive is not permitted to output the contents of the region.

Alternative Location: In addition to, or alternative to storage in the ADIP Aux Frames, the data block may be stored in a contiguous area of the main data channel. In that case, the Alternative Location specifies the first Physical Sector Number of the location in the main data channel that contains one or more copies of the data block. Otherwise, Alternative Location shall be set to zero. Note that the format of the data block as contained in the main data channel may be different from the format of the data block as contained in the ADIP Aux Frames.

Bit Byte	7	6	5	4	3	2	1	0
0	(msb)							
1				Region Type Identifier				
2								(lsb)
3	Extent			Version number				
4								
:				Reserved				
15								

Figure B.4 – Extended Region Descriptor

Region Type Identifier: the Region Type Identifier shall be identical to the Region Type Identifier contained in the preceding Basic Region Descriptor.

Extent: The Extent bit shall indicate if this Extended Region Descriptor is followed by another Extended Region Descriptor, as follows:
    0: This Extended Region Descriptor is not followed by another Extended Region Descriptor.
    1: This Extended Region Descriptor is followed by another Extended Region Descriptor.

Version Number: the Version Number shall be identical to the Version Number contained in the preceding Basic Region Descriptor.

Reserved: All reserved bytes shall be set to (00).

This page is intentionally left blank

Annex C   Measurement of light reflectivity

(normative)

C.1   Calibration method

The reflectivity of a disc can be measured in several ways. The two most common methods are:
- parallel method,
- focused method.

For use in players the focused method with the help of a reference disc with known reflectance is the most relevant and easiest one, while for the calibration of the reference disc the parallel method is easier.

When measuring the reflectivity in the focused way, only the light returned by the reflective layer of the disc (I_m) will fall onto the photo detector. The reflected light coming from the front surface of the disc and the light coming from the parasitic reflections inside the disc will mainly fall outside the photo detector. Because in the parallel method only the "total" reflected power ($I_{//}$) can be measured, a calculation is needed to determine the "main" reflectance from the reflective layer.

A good reference disc shall be chosen, for instance 0,6 mm glass disc with a golden reflective mirror. This reference disc shall be measured by a parallel beam as shown in figure C.1
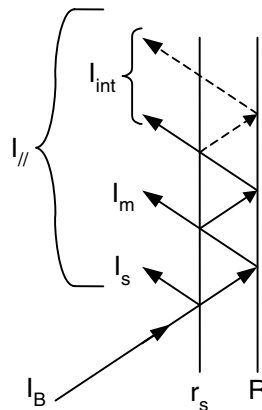
Figure C.1 - Reflectivity calibration

In this figure the following applies:

R   = reflectance of the recording layer (including the double pass substrate transmittance)

r_s = reflectance of the entrance surface

R_{ref} = reflectance as measured by the focussed beam (is by definition = I_m/I_B)

$R_{//}$ = reflectance as measured by the parallel beam (is by definition = $I_{//}/I_B$)

I_B = power of incident beam

I_s = reflected power from entrance surface

I_m = reflected power from recording layer

I_{int} = reflected power from internal reflections between entrance surface and recording layer

$I_{//}$ = measured reflected power ($I_s + I_m + I_{int}$)

The reflectance of the entrance surface is defined by :

$$r_s = \left(\frac{n-1}{n+1}\right)^2 ,$$ where n is the index of refraction of the substrate.

The main reflected power $I_m = I_{//} - I_s - I_{int}$ which leads to:

$$R_{ref} = \left[\frac{(1-r_s)^2 \times (R_{//} - r_s)}{1 - r_s \times (2 - R_{//})}\right]$$

The reference disc shall be measured on a reference drive. The total detector current $(I_1 + I_2)$ obtained from the reference disc, and measured by the focused beam is equated to I_m as determined above.

Now the arrangement is calibrated and the focused reflectance is a linear function of the reflectivity of the recording layer and the double pass substrate transmission, independently from the reflectivity of the entrance surface.

C.2   Measuring method

Reflectivity in the unrecorded Information Zone

A method of measuring the reflectance using the reference drive.

(1)   Measure the total detector current $(I_1 + I_2)_s$ from the reference disc with calibrated reflectance R_{ref}.

(2)   Measure the total detector current $(I_1 + I_2)_g$ from a groove track in an area of the disc under investigation where the groove track and the two adjacent tracks on each side of the track to be measured have been erased. Erasure of these tracks shall be done by irradiating the tracks using only the Pe power as determined from the OPC algorithm (see Annex I).

(3)   Calculate the unrecorded disc reflectance R_d as follows

$$R_d = \frac{(I_1 + I_2)_g}{(I_1 + I_2)_s} \times R_{ref}$$

Reflectivity in the recorded Information Zone

A method of measuring the reflectance using the reference drive.

(1)   Measure the total detector current $(I_1 + I_2)_s$ from the reference disc with calibrated reflectance R_{ref}.

(2)   Measure I_{14H} from a recorded groove track in an area of the disc under investigation where at least the two adjacent tracks on each side of the track to be measured also have been recorded. Recording of these tracks shall be done using the optimum powers as determined from the OPC algorithm (see Annex I).

(3)   Calculate the recorded disc reflectance R_{14H} as follows:

$$R_{14H} = \frac{I_{14H}}{(I_1 + I_2)_s} \times R_{ref}$$

Annex D   Measurement of birefringence
(normative)

D.1   Principle of the measurement

In order to measure the birefringence, circularly polarized light in a parallel beam is used. The phase retardation is measured by observing the ellipticity of the reflected light.
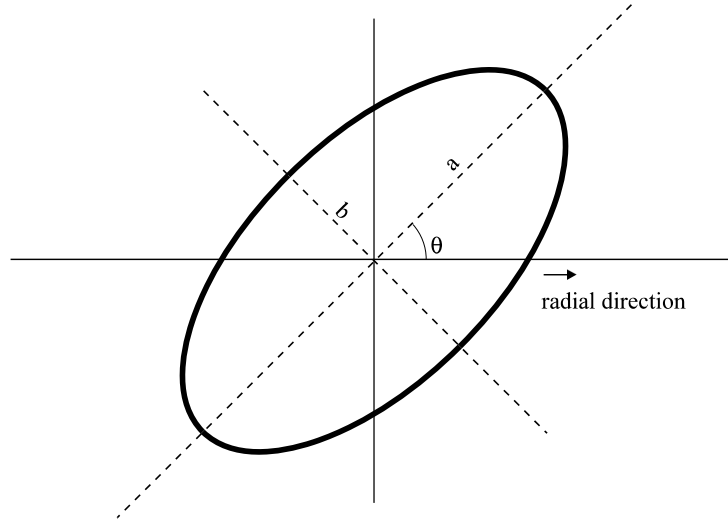
Figure D.1 - Ellipse with ellipticity $e = b/a$ and orientation θ

The orientation θ of the ellipse is determined by the orientation of the optical axis

$$\theta = \gamma - \pi/4 \tag{1}$$

where γ is the angle between the optical axis and the radial direction.

The ellipticity, $e = b/a$, is a function of the phase retardation δ

$$e = \tan\left[\frac{1}{2}\left(\frac{\pi}{2} - \delta\right)\right] \tag{2}$$

When the phase retardation δ is known the birefringence BR can be expressed as a fraction of the wavelength

$$BR = \frac{\lambda}{2\pi}\delta \text{ nm} \tag{3}$$

Thus, by observing the elliptically polarized light reflected from the disc, the birefringence can be measured and the orientation of the optical axis can be assessed as well.

D.2   Measurements conditions

The measurement of the birefringence specified above shall be made under the following conditions.
Mode of measurement in reflection, double pass through the substrate.

Wavelength λ of the laser light	640 nm ± 15 nm
Beam diameter (FWHM)	1,0 mm ± 0,2 mm
Angle β of incidence in radial direction relative to the radial plane perpendicular to Reference Plane P	7,0° ± 0,2°
Disc mounting	horizontally
Rotation	less than 1 Hz
Temperature and relative humidity	as specified in 8.1.1

D.3   Example of a measurement set-up

Whilst this System Description does not prescribe a specific device for measuring birefringence, the device shown schematically in figure D.2 as an example, is well suited for this measurement.
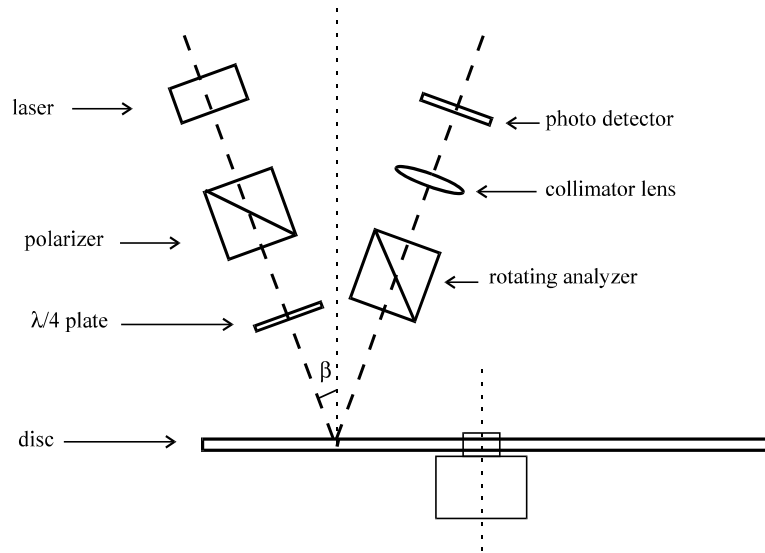
Figure D.2 - Example of a device for the measurement of birefringence

Light from a laser source, collimated into a polarizer (extinction ratio $\approx 10^{-5}$), is made circular by a λ/4 plate. The ellipticity of the reflected light is analyzed by a rotating analyzer and a photo detector. For every location on the disc, the minimum and the maximum values of the intensity are measured. The ellipticity can then be calculated as

$$e^2 = I_{min}/I_{max} \qquad\qquad (4)$$

Combining equations (2), (3), and (4) yields

$$BR = \frac{\lambda}{4} - \frac{\lambda}{\pi}\arctan\sqrt{\frac{I_{min}}{I_{max}}}$$

This device can be easily calibrated as follows
− I_{min} is set to 0 by measuring a polarizer or a λ/4 plate,
− $I_{min} = I_{max}$ when measuring a mirror

Apart of the d.c. contribution of the front surface reflection, a.c. components may occur, due to the interference of the reflection(s) of the front surface with the reflection(s) from the recording layer. These a.c. reflectivity effects are significant only if the disc substrate has an extremely accurate flatness and if the light source has a high coherence.

Annex E   Measuring conditions for operation signals

(normative)

E.1   System diagram for jitter measurement and determination of the characteristics of user data

The general system diagram shall be as shown in figure E.1.
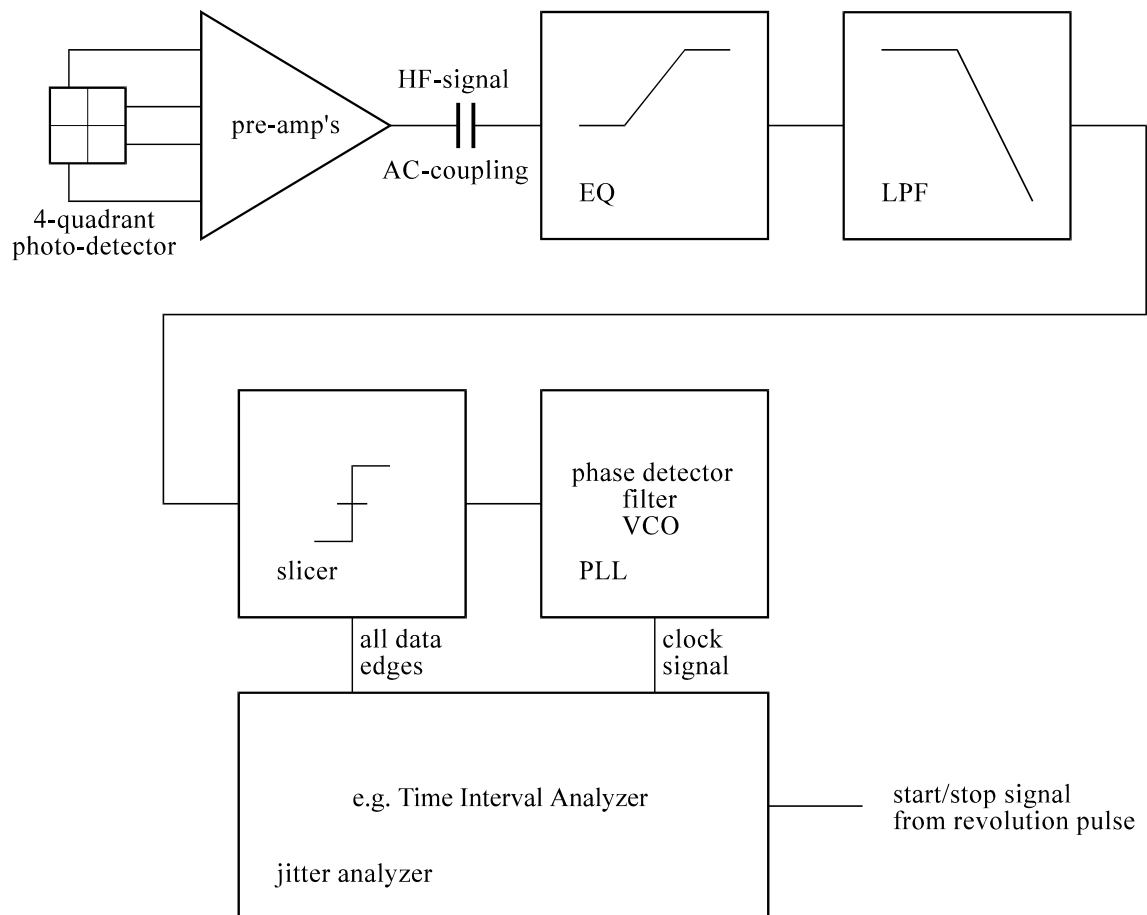
Figure E.1 - General diagram for jitter measurement

E.2   Open loop transfer function for PLL

The open-loop transfer function for the PLL shall be as shown in figure E.2
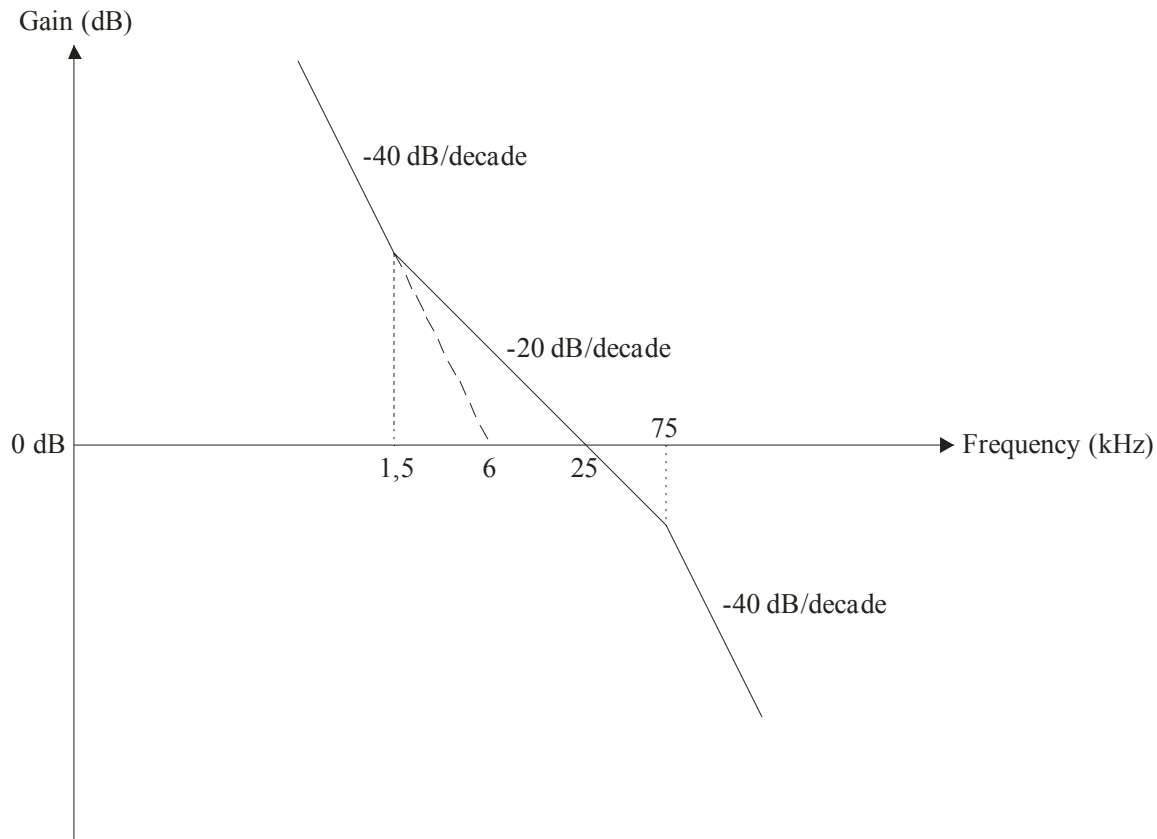
Figure E.2 - Schematic representation of the open-loop transfer function for PLL

E.3   Slicer

The slicer shall be a 1^{st} order, integrating feed-back auto-slicer with a -3 dB closed-loop bandwidth of 5 kHz.

E.4   Conditions for measurement

The bandwidth of the pre-amplifier of the photo detector shall be greater than 20 MHz in order to prevent group-delay distortion.

Equalizer: 3-tap transversal filter with transfer function $H(z) = 1,364\, z^{-2} - 0,182\, (1 + z^{-4})$

Low-pass filter: 6th order Bessel filter, f_c (-3 dB) = 8,2 MHz

   Filtering plus equalization :

      - Gain variation : 1 dB max. (below 7 MHz)

      - Group delay variation : 1 ns max. (below 7 MHz)

      - (Gain at 5,0 MHz - Gain at 0 Hz) = 3,2 dB $\pm$ 0,3 dB

a.c. coupling (high-pass filter) = 1st order, f_c (-3 dB) = 1 kHz

Correction of the angular deviation : only d.c. deviation shall be corrected.
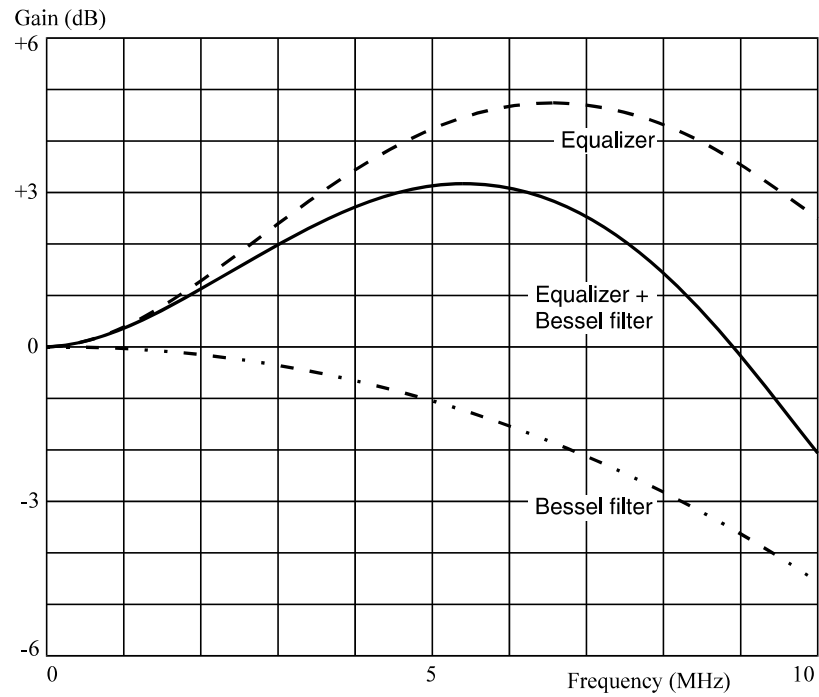
Figure E.3 - Frequency characteristics for the equalizer and the low-pass filter

E.5   Measurement

The jitter of all leading and trailing edges over one revolution shall be measured.

This page is intentionally left blank

Annex F   Measurement of the differential phase tracking error

(normative)

F.1   Measuring method for the differential phase tracking error

The reference circuit for the measurement of the tracking error shall be that shown in figure F.1. Each output of the diagonal pairs of elements of the quadrant photo detector shall be converted to binary signals independently after equalization of the wave form with the transfer function defined by:

$$H(i\omega) = (1 + 1,6 \times 10^{-7} \times i\omega) / (1 + 4,7 \times 10^{-8} \times i\omega)$$

The gain of the comparators shall be sufficient to reach full saturation on the outputs, even with minimum signal amplitudes. Phases of the binary pulse signal edges (signals B1 and B2) shall be compared to each other to produce a time-lead signal C1 and a time-lag signal C2. The phase comparator shall react to each individual edge with signal C1 or C2, depending on the sign of Δt_i. A tracking error signal shall be produced by smoothing the C1, C2 signals with low-pass filters and by subtracting by means of a unity gain differential amplifier. The low-pass filters shall be 1st order filters with a cut-off frequency (-3 dB) of 30 kHz.

Special attention shall be given to the implementation of the circuit because very small time differences have to be measured (1 % of T equals only 0,38 ns). Careful averaging is needed.

The average time difference between two signals from the diagonal pairs of elements of the quadrant detector shall be

$$\overline{\Delta t} = \frac{1}{N} \sum \Delta t_i$$

where N is the number of edges, both rising and falling.

F.2   Measurement of $\overline{\Delta t}$ /T without time interval analyzer

The relative time difference $\overline{\Delta t} / T$ is represented by the amplitude of the tracking error signal provided that the amplitudes of the C1 and C2 signals and the frequency component of the read-out signals are normalized. The relation between the tracking error amplitude $\overline{\Delta TVE}$ and the time difference is given by:

$$\overline{\Delta TVE} = \frac{\sum \Delta t_i}{\sum T_i} \text{Vpc} = \frac{\sum \Delta t_i}{N \text{nT}} \text{Vpc} = \frac{\overline{\Delta t}}{T} \times \frac{\text{Vpc}}{\text{n}}$$

where:

Vpc is the amplitude of the C1 and C2 signals
T_i is the actual length of the read-out signal in the range 3T to 14T
n.T is the weighted average value of the actual lengths
N.n.T is the total averaging time.

The specification for the tracking gain can now be rewritten by using the tracking error amplitude as follows:

$$0,5 \times (\text{Vpc}/\text{n}) \leq \overline{\Delta TVE} \leq 1,1 \times (\text{Vpc}/\text{n}) \quad \text{at 0,1 μm radial offset.}$$

$$H(j\omega) = \frac{1+1.6\times10^{-7}\times i\omega}{1+4.7\times10^{-8}\times i\omega}$$
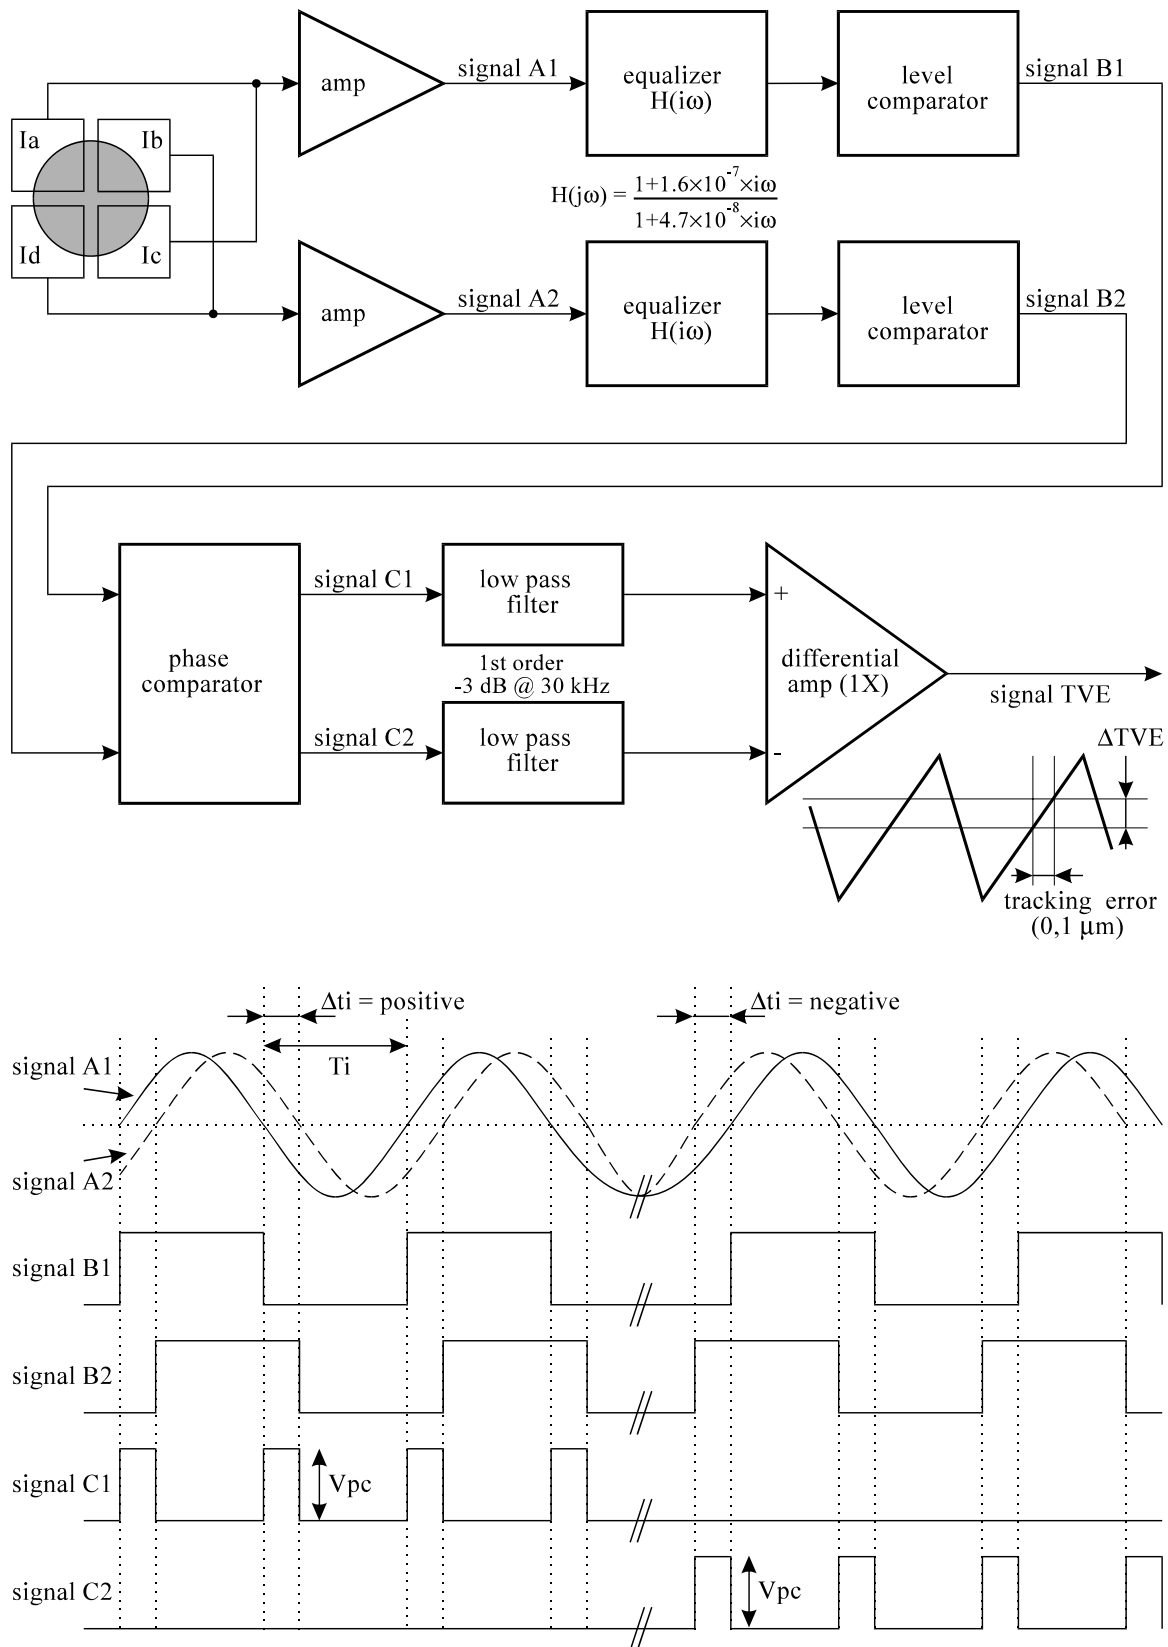
Figure F.1 - Circuit for tracking error measurements

F.3 Calibration of the circuit

Assuming that Vpc equals ≈ 5 V and that the measured value of n equals ≈ 5, then the above relation between the tracking error amplitude $\overline{\Delta TVE}$ and the time difference $\overline{\Delta t}$ can be simplified to:

$$\overline{\Delta TVE} = \frac{\overline{\Delta t}}{T} \times \frac{Vpc}{n} \approx \frac{\overline{\Delta t}}{T}$$

The average runlength n of the 8-to-16 modulated signal is depending on the data content and the averaging time. Therefore the circuit shall be calibrated with a fixed frequency signal, corresponding to a modulated signal with 5T runlengths. For this purpose sinusoidal signals with a frequency of 2,616 MHz can be used.

Typically the pulses of signals C1 and C2 will be generated by some digital gate circuit with an output signal switching between ground and the supply voltage. This voltage swing is assumed to be about 5 volts, however, depending on the applied technology, it may deviate from 5 volts significantly.

Because the formal specification for the DPD signal is:

$$0,5 \leq \frac{\overline{\Delta t}}{T} \leq 1,1 \quad \text{at 0,1 μm radial offset,}$$

the measurement by means of $\overline{\Delta TVE}$ is influenced by the actual values of Vpc and n. Therefore the following calibration procedure shall be applied.

F.3.1 Saturation of comparators

Make sure that the gain of the level comparators is such that for all actual input signal levels, the signals B1 and B2 are square wave signals. In this case the amplitude of the signal TVE is independent of the amplitude of the input signals.
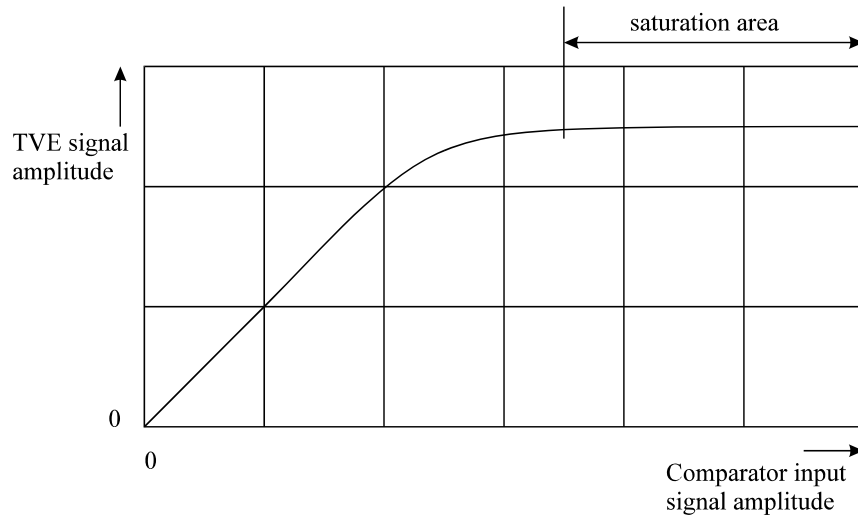
Figure F.2 - Tracking error signal amplitude versus comparator input signal amplitude

F.3.2 Correction for n and Vpc

Because of the above mentioned deviations of n and Vpc, and possibly some other circuit parameters, a correction factor K has to be determined, such that:

$$\overline{\Delta t} / T \text{ (real)} = K \times \overline{\Delta TVE} \text{ (measured)}.$$

This can be achieved in the following way:

a) Generate two sinusoidal signals A1 and A2 of frequency 2,616 MHz with a phase difference, and inject them into the two equalizer circuits.

b) Measure the relation between $\overline{\Delta t} / T$ and $\overline{\Delta TVE}$, and determine K from figure F.3:

$$K = \frac{\overline{\Delta t / T} \text{(injected)}}{\overline{\Delta TVE} \text{(measured)}} . \text{ Now the set-up is ready for use.}$$
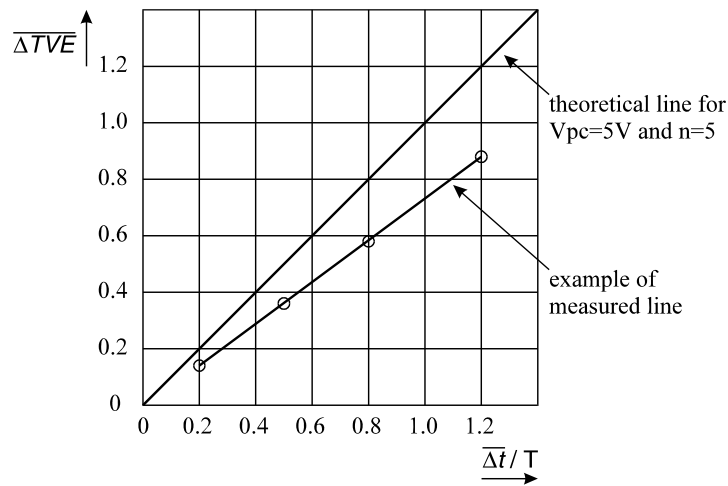
Figure F.3 - $\overline{\Delta TVE}$ **versus** $\overline{\Delta t}/T$

Annex G   The write pulse wave form for testing

(normative)

The write pulse waveform obtained from the NRZI data and the channel clock is shown in figure G.1. It consists of int(N/2) pulses, where int(x) represents the largest integer ≤ x and N is the length of the NRZI pulse expressed in channel clock cycles.

Figure G.1 - Write pulse waveform
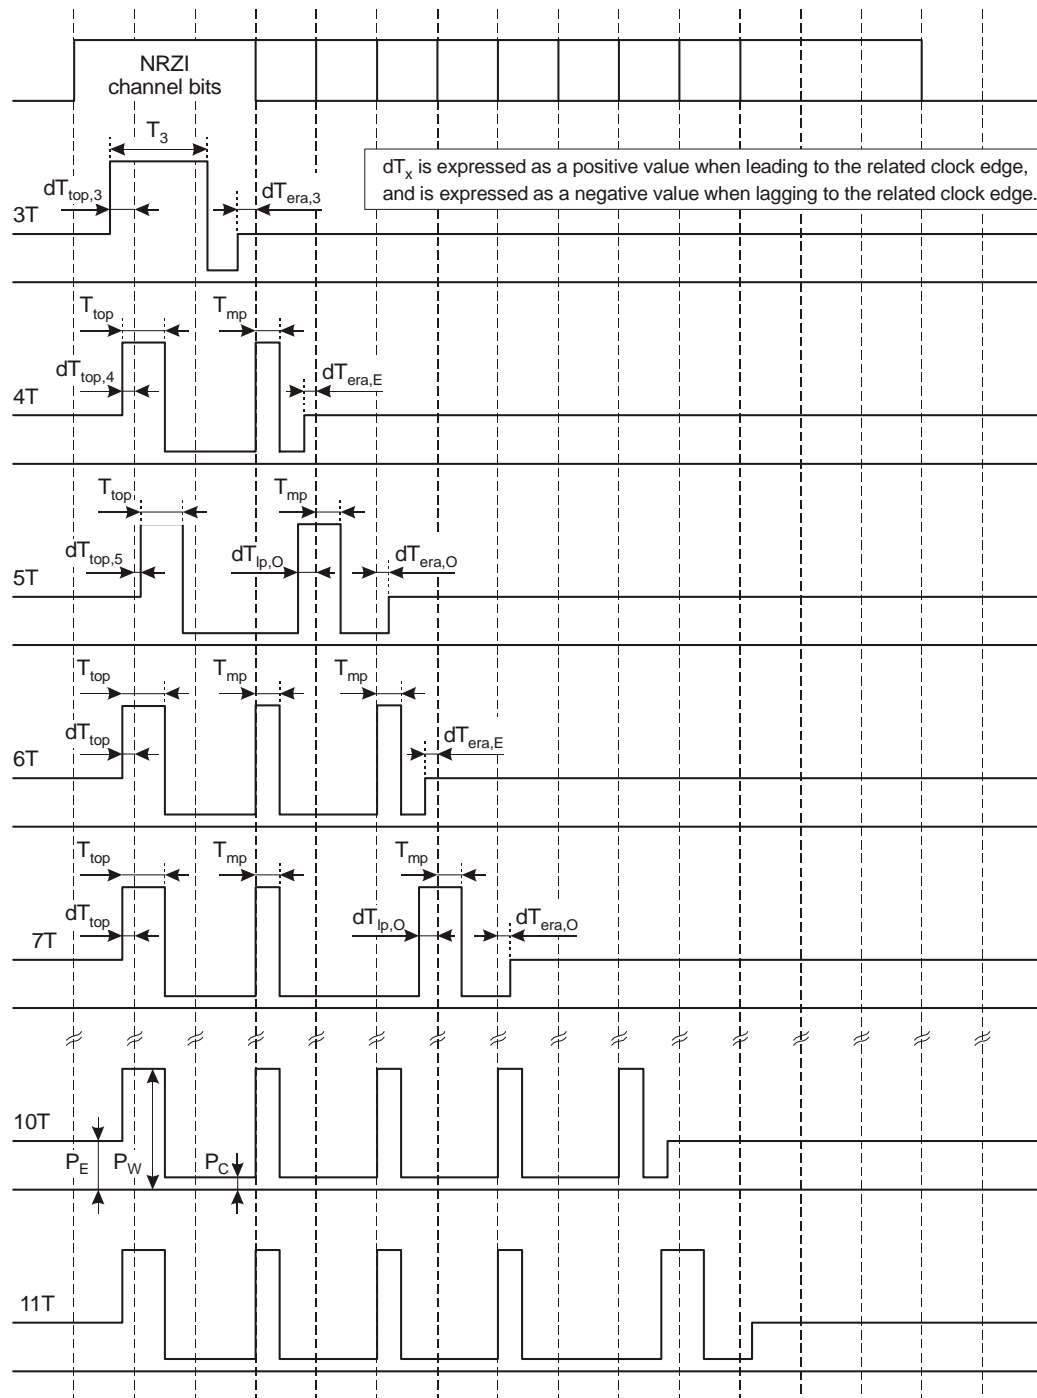
The values for Pw, Pe, and Pc are determined according to the OPC algorithm (see Annex I). An example of the write pulse waveform for the minimum mark, the minimum space and an 8T mark is shown in figure G.2.

G.1   Timing parameters

The pulse width times, T_{mp}, T_3 and T_{top} are recording speed dependent and shall be as indicated by bytes 90, 98 and 99, respectively bytes 91, 108 and 109, respectively bytes 92, 118 and 119 in 14.4.2.3.1. The duration is defined in fractions of the channel clock period:

$$T_{mp} = m \times \tfrac{1}{16} T_W \text{ , where m = 3, 4, .. or 16}$$

$$T_3 = i \times \tfrac{1}{16} T_W \text{ , where i = 3, 4, .. or 24}$$

$$T_{top} = j \times \tfrac{1}{16} T_W \text{ , where j = 3, 4, .. or 24}$$

The first pulse lead/lag-time $dT_{top} / dT_{top,5} / dT_{top,4} / dT_{top,3}$ and the erase lead-time $dT_{era,O} / dT_{era,E} / dT_{era,3}$ are recording speed dependent and shall be as indicated by bytes 100/101/102/103 and 105/106/107, respectively bytes 110/111/112/113 and 115/116/117, respectively bytes 120/121/122/123 and 125/126/127 in 14.4.2.3.1. The duration is defined in fractions of the channel clock period:

$$dT_{top} / dT_{top,5} / dT_{top,4} / dT_{top,3} = p \times \tfrac{1}{16} T_W \text{ , where p = -8, -7, .. , -1, 0, 1, .. or 8}$$

$$dT_{era,O} / dT_{era,E} / dT_{era,3} = q \times \tfrac{1}{16} T_W \text{ , where q = -32, -31, .. , -1, 0, 1, .. or 16}$$
(positive values are leading, negative values are lagging, see figure G.1)

The last pulse lead/lag-time $dT_{lp,O}$ (only for odd runlengths $\geq 5T$; the duration of the last pulse in this case shall be $= T_{mp} + dT_{lp,O}$) is recording speed dependent and shall be as indicated by byte 104, respectively byte 114, respectively byte 124 in 14.4.2.3.1. The duration is defined in fractions of the channel clock period:

$$dT_{lp,O} = s \times \tfrac{1}{16} T_W \text{ , where s = -8, -7, .. , -1, 0, 1, .. or 8}$$
(positive values are leading, negative values are lagging, see figure G.1)

The widths of all pulses shall be at least 2,3 ns and the accuracy of all pulse widths shall be better than $\pm$ 0,3 ns.
The laser power shall be switched to cooling level between each two write pulses for at least 1,8 ns.
After the last pulse the time period between the falling edge of this last pulse and the start of the erase level (which period $= T_W - T_{mp} - dT_{era,O/E}$ or $2 \times T_W + dT_{top,3} - T_3 - dT_{era,3}$) shall be $= 0$ (no "cooling gap") or $\geq$ 0,8 ns.
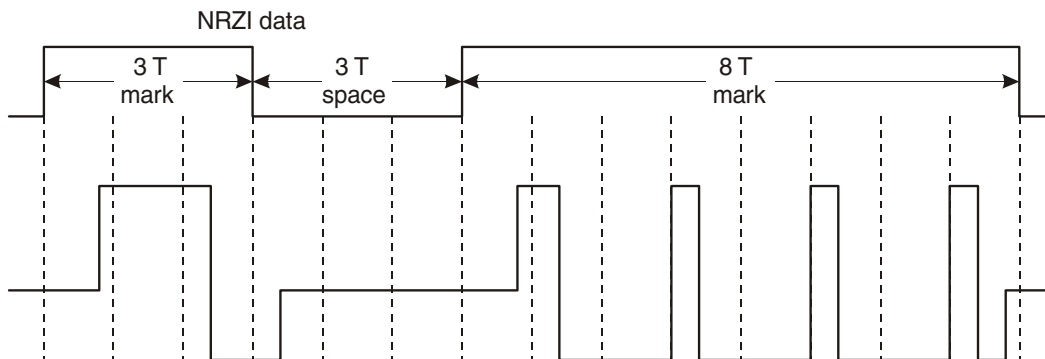
Figure G.2 - Example of a Multiple-pulse

G.2 Rise and fall times

The rise times, T_r, and fall times, T_f, as specified in figure G.3 shall not exceed 1,7 ns.

Possible overshoots shall be < 20% of the step size (P1, P2 or P3).
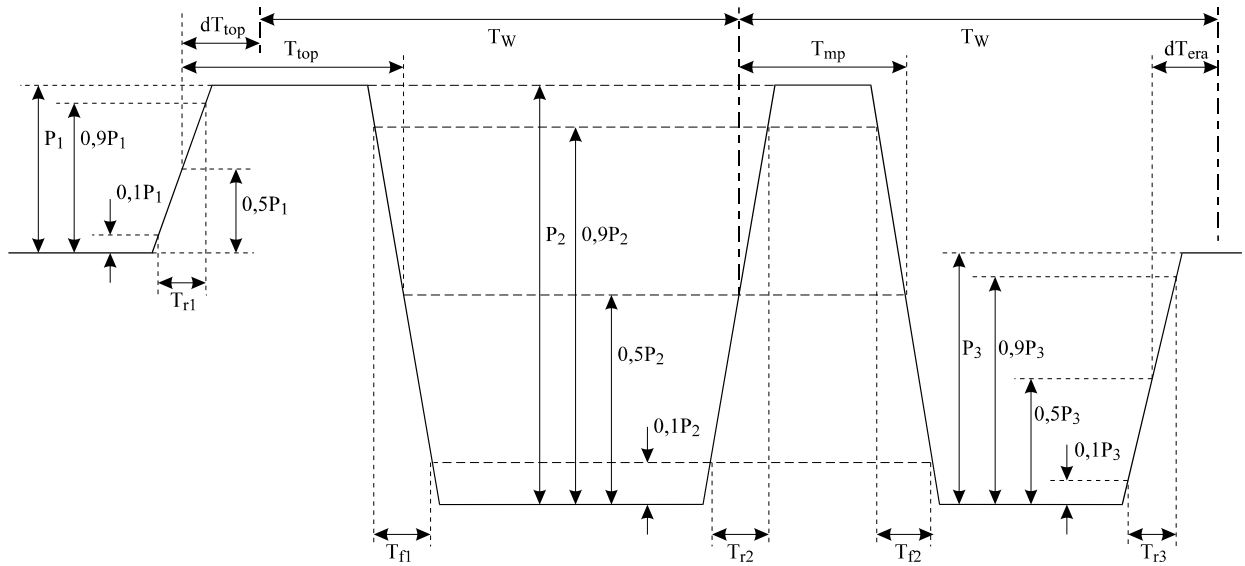
Figure G.3 - Rise Times and Fall Times

This page is intentionally left blank

Annex H   8-to-16 Modulation

(normative)

8-to-16 modulation shall satisfy RLL(2,10) requirements. The encoding system is shown in figure H.1 with the conversion tables shown in table H.1 and table H.2.
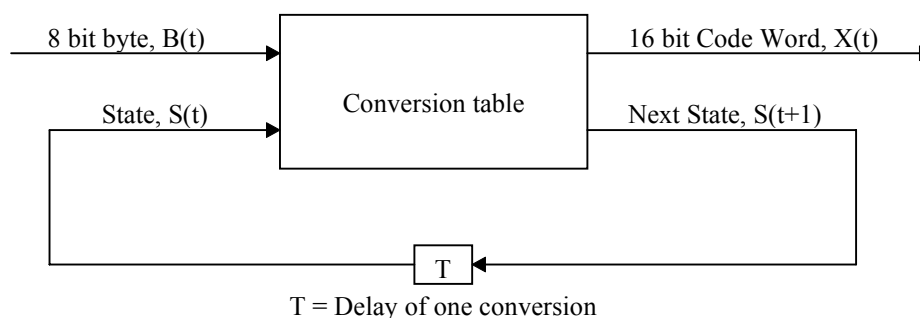
Where

$X(t) = H\{B(t), S(t)\}$ $X_{15}(t) =$ msb and $X_0(t) =$ lsb
$S(t+1) = G\{B(t), S(t)\}$
H is the output function from the conversion tables
G is the next-state function from the conversion tables

Figure H.1 - Code Word generating system

The States of the Code Words, X(t), shall be chosen to satisfy the RLL(2,10) requirements of a minimum of 2 ZEROs and a maximum of 10 ZEROs between ONEs of adjacent Code Words.

Code Word X(t)	Next State S(t+1)	Code Word X(t+1)
Ends with 1 or no trailing ZEROs	State 1	Starts with 2 to 9 leading ZEROs
Ends with 2 to 5 trailing ZEROs	State 2	Starts with 1or up to 5 leading ZEROs and $X_{15}(t+1)$, $X_3(t+1) = 0,0$
Ends with 2 to 5 trailing ZEROs	State 3	Starts with none or up to 5 leading ZEROs and $X_{15}(t+1)$, $X_3(t+1) \neq 0,0$
Ends with 6 to 9 trailing ZEROs	State 4	Starts with 1 or no leading ZEROs

Figure H.2 - Determination of States

Note that when decoding the recorded data, knowledge about the encoder is required to be able to reconstitute the original bytes:

$B(t) = H^{-1}\{X(t), S(t)\}$

Because of the involved error propagation, such state-dependent decoding is to be avoided. In the case of this 8-to-16 modulation, the conversion tables have been chosen in such a way that knowledge about the State is not required in most cases. As can be gathered from the tables, in some cases, two 8-bit bytes, for instance the 8-bit bytes 5 and 6 in States 1 and 2 in table G.1 generate the same 16-bit Code Words. The construction of the tables allows to solve this apparent ambiguity. Indeed, if two identical Code Words leave a State, one of them goes to State 2 and the other to

State 3. Because the setting of bits X_{15} and X_3 is always different in these two States, any Code Word can be uniquely decoded by analysing the Code Word itself together with bits X_{15} and X_3 of the next Code Word :

$$B(t) = H^{-1}\{ X(t), X_{15}(t+1), X_3(t+1) \}$$

The Substitution table, table H.2, is included to insure meeting the DCC requirements of 13.8.

Table H.1 - Main Conversion Table

8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
0	0010000000001001	1	0100000100100000	2	0010000000001001	1	0100000100100000	2
1	0010000000010010	1	0010000000010010	1	1000000100100000	3	1000000100100000	3
2	0010000100100000	2	0010000100100000	2	1000000000010010	1	1000000000010010	1
3	0010000001001000	2	0100010010000000	4	0010000001001000	2	0100010010000000	4
4	0010000010010000	2	0010000010010000	2	1000000100100000	2	1000000100100000	2
5	0010000000100100	2	0010000000100100	2	1001001000000000	4	1001001000000000	4
6	0010000000100100	3	0010000000100100	3	1000100100000000	4	1000100100000000	4
7	0010000001001000	3	0100000000010010	1	0010000001001000	3	0100000000010010	1
8	0010000010010000	3	0010000010010000	3	1000010010000000	4	1000010010000000	4
9	0010000100100000	3	0010000100100000	3	1001001000000001	1	1001001000000001	1
10	0010010010000000	4	0100100010000000	4	1000100100000001	1	1000100100000001	1
11	0010000100100000	4	0010000100100000	4	1000000010010000	3	1000000010010000	3
12	0010010010000001	1	0100010010000001	1	1000000010010000	2	1000000010010000	2
13	0010000100100001	1	0010000100100001	1	1000010010000001	1	1000010010000001	1
14	0010000001001001	1	0100000000100100	3	0010000001001001	1	0100000000100100	3
15	0010000100100001	1	0010000100100001	1	1000001001000001	1	1000001001000001	1
16	0010000010010001	1	0010000010010001	1	1000000100100001	1	1000000100100001	1
17	0010000000100010	1	0010000000100010	1	1000001001000000	4	1000001001000000	4
18	0001000000001001	1	0100000010010000	2	0001000000001001	1	0100000010010000	2
19	0010000000010001	1	0010000000010001	1	1001000100000000	4	1001000100000000	4
20	0001000000010010	1	0001000000010010	1	1000100010000000	4	1000100010000000	4
21	0000100000000010	1	0000100000000010	1	1000000010010001	1	1000000010010001	1
22	0000010000000001	1	0000010000000001	1	1000000001001001	1	1000000001001001	1
23	0010001000100000	2	0010001000100000	2	1000000010001000	2	1000000001001000	2
24	0010000100010000	2	0010000100010000	2	1000000001001000	3	1000000001001000	3
25	0010000010001000	2	0100000000100100	2	0010000010001000	2	0100000000100100	2
26	0010000001000100	2	0010000001000100	2	1000000000100010	1	1000000000100010	1
27	0001000100100000	2	0001000100100000	2	1000000000010001	1	1000000000010001	1
28	0010000000001000	2	0100000010010000	3	0010000000001000	2	0100000010010000	3
29	0001000010010000	2	0001000010010000	2	1001001000000010	1	1001001000000010	1
30	0001000001001000	2	0100000100100000	3	0001000001001000	2	0100000100100000	3
31	0001000000100100	2	0001000000100100	2	1001000100000001	1	1001000100000001	1
32	0001000000000100	2	0001000000000100	2	1000100100000010	1	1000100100000010	1
33	0001000000000100	3	0001000000000100	3	1000100010000001	1	1000100010000001	1
34	0001000000100100	3	0001000000100100	3	1000000000100100	2	1000000000100100	2
35	0001000001001000	3	0100001001000000	4	0001000001001000	3	0100001001000000	4
36	0001000010010000	3	0001000010010000	3	1000000000100100	3	1000000000100100	3
37	0001000100100000	3	0001000100100000	3	1000010001000000	4	1000010001000000	4
38	0010000000001000	3	0100100100000001	1	0010000000001000	3	0100100100000001	1
39	0010000001000100	3	0010000001000100	3	1001000010000000	4	1001000010000000	4
40	0010000010001000	3	0100010010000001	1	0010000010001000	3	0100010010000001	1
41	0010000100010000	3	0010000100010000	3	1000010010000010	1	1000010010000010	1
42	0010001000100000	3	0010001000100000	3	1000001000100000	2	1000001000100000	2
43	0010010001000000	4	0010010001000000	4	1000010001000001	1	1000010001000001	1
44	0001001001000000	4	0001001001000000	4	1000001000100000	3	1000001000100000	3
45	0000001000000001	1	0100010001000000	4	1000001001000010	1	0100010001000000	4

8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
46	0010010010000010	1	0010010010000010	1	1000001000100001	1	1000001000100001	1
47	0010000010001001	1	0100000100100001	1	0010000010001001	1	0100001001000001	1
48	0010010001000001	1	0010010001000001	1	1000000100010000	2	1000000100010000	2
49	0010001001000010	1	0010001001000010	1	1000000010001000	2	1000000010001000	2
50	0010001000100001	1	0010001000100001	1	1000000100010000	3	1000000100010000	3
51	0001000001001001	1	0100000100100001	1	0001000001001001	1	0100000100100001	1
52	0010000100100010	1	0010000100100010	1	1000000100100010	1	1000000100100010	1
53	0010000100010001	1	0010000100010001	1	1000000100010001	1	1000000100010001	1
54	0010000010010010	1	0010000010010010	1	1000000010010010	1	1000000010010010	1
55	0010000001000010	1	0010000001000010	1	1000000010001001	1	1000000010001001	1
56	0010000000100001	1	0010000000100001	1	1000000001000010	1	1000000001000010	1
57	0000100000001001	1	0100000010010001	1	0000100000001001	1	0100000010010001	1
58	0001001001000001	1	0001001001000001	1	1000000000100001	1	1000000000100001	1
59	0001000100100001	1	0001000100100001	1	0100000001001001	1	0100000001001001	1
60	0001000010010001	1	0001000010010001	1	1001001000010010	1	1001001000010010	1
61	0001000000100010	1	0001000000100010	1	1001001000001001	1	1001001000001001	1
62	0001000000010001	1	0001000000010001	1	1001000100000010	1	1001000100000010	1
63	0000100000010010	1	0000100000010010	1	1000000001000100	2	1000000001000100	2
64	0000010000000010	1	0000010000000010	1	0100000010001000	2	0100000010001000	2
65	0010010000100000	2	0010010000100000	2	1000010000100000	2	1000010000100000	2
66	0010001000010000	2	0010001000010000	2	1000001000010000	2	1000001000010000	2
67	0010000100001000	2	0100000000100010	1	0010000100001000	2	0100000000100010	1
68	0010000010000100	2	0010000010000100	2	1000000100001000	2	1000000100001000	2
69	0010000000010000	2	0010000000010000	2	1000000010000100	2	1000000010000100	2
70	0001000010001000	2	0100001000100000	2	0001000010001000	2	0100001000100000	2
71	0001001000100000	2	0001001000100000	2	0100000010001000	2	0100000010001000	2
72	0001000000001000	2	0100000100010000	2	0001000000001000	2	0100000100010000	2
73	0001000100010000	2	0001000100010000	2	1000000001000100	3	1000000001000100	3
74	0001000001000100	2	0001000001000100	2	0100000001001000	3	0100000001001000	3
75	0000100100100000	2	0000100100100000	2	1000010000100000	3	1000010000100000	3
76	0000100010010000	2	0000100010010000	2	1000001000010000	3	1000001000010000	3
77	0000100001001000	2	0100000001000100	2	0000100001001000	2	0100000001000100	2
78	0000100000100100	2	0000100000100100	2	1000000100001000	3	1000000100001000	3
79	0000100000000100	2	0000100000000100	2	1000000010000100	3	1000000010000100	3
80	0000100000000100	3	0000100000000100	3	0100000010001000	3	0100000010001000	3
81	0000100000100100	3	0000100000100100	3	1000100001000000	4	1000100001000000	4
82	0000100001001000	3	0100000001000100	3	0000100001001000	3	0100000001000100	3
83	0000100010010000	3	0000100010010000	3	1000000010001000	3	1000000010001000	3
84	0000100100100000	3	0000100100100000	3	1001001001001000	2	1001001001001000	2
85	0001000000001000	3	0100000100010000	3	0001000000001000	3	0100000100010000	3
86	0001000001000100	3	0001000001000100	3	1001001000100100	2	1001001000100100	2
87	0001000010001000	3	0100001000100000	3	0001000010001000	3	0100001000100000	3
88	0001000100010000	3	0001000100010000	3	1001001001001000	3	1001001001001000	3
89	0001001000100000	3	0001001000100000	3	1001000010000001	1	1001000010000001	1
90	0010000000010000	3	0010000000010000	3	1000100100010010	1	1000100100010010	1
91	0010000010000100	3	0010000010000100	3	1000100100001001	1	1000100100001001	1
92	0010000100001000	3	0100000000010001	1	0010000100001000	3	0100000000010001	1
93	0010001000010000	3	0010001000010000	3	1000100010000010	1	1000100010000010	1
94	0010010000100000	3	0010010000100000	3	1000100001000001	1	1000100001000001	1
95	0000001000000010	1	0100100100000010	1	1000010010010010	1	0100100100000010	1
96	0000000100000001	1	0100100010000001	1	1000010010001001	1	0100100010000001	1
97	0010010010001001	1	0100010000100000	2	0010010010001001	1	0100010000100000	2
98	0010010010010010	1	0010010010010010	1	1001001000000100	2	1001001000000100	2
99	0010010001000010	1	0010010001000010	1	1001001000100100	3	1001001000100100	3
100	0010010000100001	1	0010010000100001	1	1000010001000010	1	1000010001000010	1

8-bit byte	State 1 Code Word msb ... lsb	Next State	State 2 Code Word msb ... lsb	Next State	State 3 Code Word msb ... lsb	Next State	State 4 Code Word msb ... lsb	Next State
101	0010001001001001	1	0100010010000010	1	0010001001001001	1	0100010010000010	1
102	0010001000100010	1	0010001000100010	1	1000010000100001	1	1000010000100001	1
103	0010001000010001	1	0010001000010001	1	1000001001001001	1	1000001001001001	1
104	0010000100010010	1	0010000100010010	1	1000001000100010	1	1000001000100010	1
105	0010000010000010	1	0010000010000010	1	1000001000010001	1	1000001000010001	1
106	0010000100001001	1	0100001000010000	2	0010000100001001	1	0100001000010000	2
107	0010000001000001	1	0010000001000001	1	1000000100010010	1	1000000100010010	1
108	0001001001000010	1	0001001001000010	1	1000000100001001	1	1000000100001001	1
109	0001001000100001	1	0001001000100001	1	1000000010000010	1	1000000010000010	1
110	0001000100100010	1	0001000100100010	1	1000000001000001	1	1000000001000001	1
111	0001000100010001	1	0001000100010001	1	0100000010001001	1	0100000010001001	1
112	0001000010010010	1	0001000010010010	1	1001001001001001	1	1001001001001001	1
113	0001000001000010	1	0001000001000010	1	1001001000100010	1	1001001000100010	1
114	0001000010001001	1	0100010000100000	3	0001000010001001	1	0100010000100000	3
115	0001000000100001	1	0001000000100001	1	1001001000010001	1	1001001000010001	1
116	0000100100100001	1	0000100100100001	1	1001000100010010	1	1001000100010010	1
117	0000100010010001	1	0000100010010001	1	1001000100001001	1	1001000100001001	1
118	0000100001001001	1	0100010001000001	1	0000100001001001	1	0100010001000001	1
119	0000100000100010	1	0000100000100010	1	1000100100100100	2	1000100100100100	2
120	0000100000010001	1	0000100000010001	1	1000100100000100	2	1000100100000100	2
121	0000010000001001	1	0100001001000010	1	0000010000001001	1	0100001001000010	1
122	0000010000010010	1	0000010000010010	1	1000100000100000	2	1000100000100000	2
123	0010010010000100	2	0010010010000100	2	1000010010000100	2	1000010010000100	2
124	0010010000010000	2	0010010000010000	2	1000010000010000	2	1000010000010000	2
125	0010001000001000	2	0100001000100001	1	0010001000001000	2	0100001000100001	1
126	0010001001000100	2	0010001001000100	2	1000001001000100	2	1000001001000100	2
127	0001000100001000	2	0100000100100010	1	0001000100001000	2	0100000100100010	1
128	0010000100100100	2	0010000100100100	2	1000001000001000	2	1000001000001000	2
129	0000100010001000	2	0100000100010001	1	0000100010001000	2	0100000100010001	1
130	0010000100000100	2	0010000100000100	2	1000000100100100	2	1000000100100100	2
131	0010000000100000	2	0010000000100000	2	1001001000000100	3	1001001000000100	3
132	0001001000010000	2	0001001000010000	2	1000100100100100	3	1000100100100100	3
133	0000100000001000	2	0100000010010010	1	0000100000001000	2	0100000010010010	1
134	0001000010000100	2	0001000010000100	2	1000100000100000	3	1000100000100000	3
135	0001000000010000	2	0001000000010000	2	1000010010000100	3	1000010010000100	3
136	0000100100010000	2	0000100100010000	2	1000010000010000	3	1000010000010000	3
137	0000100001000100	2	0000100001000100	2	1000001001000100	3	1000001001000100	3
138	0000010001001000	2	0100000001000010	1	0000010001001000	2	0100000001000010	1
139	0000100010010000	2	0000100010010000	2	1000001000001000	3	1000001000001000	3
140	0000010000100100	2	0000010000100100	2	1001000010000010	1	1001000010000010	1
141	0000010000000100	2	0000010000000100	2	1000000100000100	2	1000000100000100	2
142	0000010000000100	3	0000010000000100	3	1000000100100100	3	1000000100100100	3
143	0000010000100100	3	0000010000100100	3	1000000100000100	3	1000000100000100	3
144	0000010001001000	3	0100000010000100	2	0000010001001000	3	0100000010000100	2
145	0000010010010000	3	0000010010010000	3	1001000001000000	4	1001000001000000	4
146	0000100000001000	3	0100000000010000	2	0000100000001000	3	0100000000010000	2
147	0000100001000100	3	0000100001000100	3	1000000000100000	2	1000000000100000	2
148	0000100010001000	3	0100000010000100	3	0000100010001000	3	0100000010000100	3
149	0000100100010000	3	0000100100010000	3	1000000000100000	3	1000000000100000	3
150	0010000000010000	3	0010000000010000	3	0100000100001000	3	0100000100001000	3
151	0010000010000100	3	0010000010000100	3	1000000001000000	4	1000000001000000	4
152	0010001000001000	3	0100001000010000	3	0001000100001000	3	0100001000010000	3
153	0001001000010000	3	0001001000010000	3	1001000001000001	1	1001000001000001	1
154	0010000000100000	3	0010000000100000	3	0100000100001000	2	0100000100001000	2
155	0010000100000100	3	0010000100000100	3	1001000100100100	3	1001000100100100	3

8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
156	0010000100100100	3	0010000100100100	3	1000100100100010	1	1000100100100010	1
157	0010001000001000	3	0100000000100001	1	0010001000001000	3	0100000000100001	1
158	0010001001000100	3	0010001001000100	3	1000100100000100	3	0100100100000000	4
159	0010010000010000	3	0010010000010000	3	1001001001000100	2	1001001001000100	2
160	0010010010000100	3	0010010010000100	3	1001001000001000	2	1001001000001000	2
161	0000001000010010	1	0100000000010000	3	1000100100010001	1	0100000000010000	3
162	0000001000001001	1	0100100100100100	2	1000100010010010	1	0100100100100100	2
163	0000000100000010	1	0100100100100100	3	1000100010001001	1	0100100100100100	3
164	0000000010000001	1	0100100100010010	1	1000100001000010	1	0100100100010010	1
165	0010010010010001	1	0010010010010001	1	1001000100100100	2	1001000100100100	2
166	0010010000100010	1	0010010000100010	1	1001000100000100	2	1001000100000100	2
167	0010010001001001	1	0100100100000100	2	0010010001001001	1	0100100100000100	2
168	0010010000010001	1	0010010000010001	1	1001001001000100	3	1001001001000100	3
169	0010001000010010	1	0010001000010010	1	1000100000100001	1	1000100000100001	1
170	0010000100000010	1	0010000100000010	1	1000010010010001	1	1000010010010001	1
171	0010001000001001	1	0100100000100000	3	0010001000001001	1	0100100000100000	3
172	0010000010000001	1	0010000010000001	1	1000010001001001	1	1000010001001001	1
173	0001001000100010	1	0001001000100010	1	1000010000100010	1	1000010000100010	1
174	0001001000010001	1	0001001000010001	1	1000010000010001	1	1000010000010001	1
175	0001000100010010	1	0001000100010010	1	1000001000010010	1	1000001000010010	1
176	0001000010000010	1	0001000010000010	1	1000001000001001	1	1000001000001001	1
177	0001001001001001	1	0100100010000010	1	0001001001001001	1	0100100010000010	1
178	0001000001000001	1	0001000001000001	1	1000000100000010	1	1000000100000010	1
179	0000100100100010	1	0000100100100010	1	1000000010000001	1	1000000010000001	1
180	0000100100010001	1	0000100100010001	1	0100100100001001	1	0100100100001001	1
181	0001000100001001	1	0100100000100000	2	0001000100001001	1	0100100000100000	2
182	0000100010010010	1	0000100010010010	1	0100010010001001	1	0100010010001001	1
183	0000100001000010	1	0000100001000010	1	0100001001001001	1	0100001001001001	1
184	0000100010001001	1	0100001010000100	3	0000100010001001	1	0100001010000100	3
185	0000100000100001	1	0000100000100001	1	1001000000100000	2	1001000000100000	2
186	0000010010010001	1	0000010010010001	1	1000100100001000	2	1000100100001000	2
187	0000010000100010	1	0000010000100010	1	1000100010000100	2	1000100010000100	2
188	0000010001001001	1	0100100001000001	1	0000010001001001	1	0100100001000001	1
189	0000010000010001	1	0000010000010001	1	1000100000010000	2	1000100000010000	2
190	0000001001001000	2	0100010010000100	2	1000010010001000	2	0100010010000100	2
191	0000001000100100	2	0100010000010000	2	1000010001000100	2	0100010000010000	2
192	0000001000000100	2	0100001001000100	2	1000010000001000	2	0100001001000100	2
193	0010010010001000	2	0100010000010000	3	0010010010001000	2	0100010000010000	3
194	0010010001000100	2	0010010001000100	2	1000001001001000	2	1000001001001000	2
195	0010010000001000	2	0100010010010010	1	0010010000001000	2	0100010010010010	1
196	0010001000100100	2	0010001000100100	2	1000001000100100	2	1000001000100100	2
197	0010001000000100	2	0010001000000100	2	1000001000000100	2	1000001000000100	2
198	0010001001001000	2	0100010001000010	1	0010001001001000	2	0100010001000010	1
199	0001001001000100	2	0001001001000100	2	0100001000001000	2	0100001000001000	2
200	0001000100100100	2	0001000100100100	2	1001000000100000	3	1001000000100000	3
201	0001000100000100	2	0001000100000100	2	1000100100001000	3	1000100100001000	3
202	0001001000001000	2	0100010000100001	1	0001001000001000	2	0100010000100001	1
203	0001000000100000	2	0001000000100000	2	1000100010000100	3	1000100010000100	3
204	0000100010000100	2	0000100010000100	2	1000010010001000	3	1000010010001000	3
205	0000100000010000	2	0000100000010000	2	1000010001000100	3	1000010001000100	3
206	0000100100001000	2	0100001000100010	1	0000100100001000	2	0100001000100010	1
207	0000100010001000	2	0100001000010001	1	0000100010001000	2	0100001000010001	1
208	0000010001000100	2	0000010001000100	2	1000001000100100	3	1000001000100100	3
209	0000010000001000	2	0100000100010010	1	0000010000001000	2	0100000100010010	1
210	0000001000000100	3	0100000010000010	1	1000010000001000	3	0100000010000010	1

8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
211	0000001000100100	3	0100000100100100	2	1000001001001000	3	0100000100100100	2
212	0000001001001000	3	0100000100000100	2	1000001000000100	3	0100000100000100	2
213	0000010000001000	3	0100000001000001	1	0000010000001000	3	0100000001000001	1
214	0000010001000100	3	0000010001000100	3	0100001000001000	3	0100001000001000	3
215	0000010010001000	3	0100000000100000	2	0000010010001000	3	0100000000100000	2
216	0001100000010000	3	0001100000010000	3	1001001000010000	3	1001001000010000	3
217	0001100010000100	3	0001100010000100	3	1001000100000100	3	1001000100000100	3
218	0001100100001000	3	0100000100000100	3	0000100100001000	3	0100000100000100	3
219	0001000000100000	3	0001000000100000	3	0100000100001001	1	0100000100001001	1
220	0001000100000100	3	0001000100000100	3	1001001000010000	2	1001001000010000	2
221	0001000100100100	3	0001000100100100	3	1001000100001000	2	1001000100001000	2
222	0001001000001000	3	0100000100100100	3	0001001000001000	3	0100000100100100	3
223	0001001001000100	3	0001001001000100	3	1001001000001000	3	1001001000001000	3
224	0010001000000100	3	0010001000000100	3	1000100000010000	3	1000100000010000	3
225	0010001000100100	3	0010001000100100	3	1001001001000010	1	1001001001000010	1
226	0010001001001000	3	0100001001000100	3	0010001001001000	3	0100001001000100	3
227	0010010000001000	3	0100100100000100	3	0010010000001000	3	0100100100000100	3
228	0010010001000100	3	0010010001000100	3	1001000100001000	3	1001000100001000	3
229	0010010010001000	3	0100000000100000	3	0010010010001000	3	0100000000100000	3
230	0010000001000000	4	0010000001000000	4	1001001000100001	1	1001001000100001	1
231	0000001001001001	1	0100100100100010	1	1001000100100010	1	0100100100100010	1
232	0000001000100010	1	0100100010000100	2	1001000100010001	1	0100100010000100	2
233	0000001000010001	1	0100100000010000	2	1001000010010010	1	0100100000010000	2
234	0000000100010010	1	0100000001000000	4	1001000010001001	1	0100000001000000	4
235	0000000100001001	1	0100100100010001	1	1001000001000010	1	0100100100010001	1
236	0000000010000010	1	0100100010010010	1	1001000000100001	1	0100100010010010	1
237	0000000001000001	1	0100100001000010	1	1000100100100001	1	0100100001000010	1
238	0010010000010010	1	0010010000010010	1	1000100010010001	1	1000100010010001	1
239	0010001000000010	1	0010001000000010	1	1001000010000100	3	1001000010000100	3
240	0010010000001001	1	0100100010000100	3	0010010000001001	1	0100100010000100	3
241	0010000100000001	1	0010000100000001	1	1001000010000100	2	1001000010000100	2
242	0001001000010010	1	0001001000010010	1	1000000010000000	4	1000000010000000	4
243	0001000100000010	1	0001000100000010	1	1000100001001001	1	1000100001001001	1
244	0001001000001001	1	0100100000100001	1	0001001000001001	1	0100100000100001	1
245	0001000010000001	1	0001000010000001	1	1000100000100010	1	1000100000100010	1
246	0000100100010010	1	0000100100010010	1	1000100000010001	1	1000100000010001	1
247	0000100010000010	1	0000100010000010	1	1000010000010010	1	1000010000010010	1
248	0000100100001001	1	0100010010010001	1	0000100100001001	1	0100010010010001	1
249	0000100001000001	1	0000100001000001	1	1000010000001001	1	1000010000001001	1
250	0000010010010010	1	0000010010010010	1	1000001000000010	1	1000001000000010	1
251	0000010001000010	1	0000010001000010	1	1000000100000001	1	1000000100000001	1
252	0000010010001001	1	0100010000100010	1	0000010010001001	1	0100010000100010	1
253	0000010000100001	1	0000010000100001	1	0100100010001001	1	0100100010001001	1
254	0000001001000100	2	0100010000010001	1	1001000000010000	2	0100010000010001	1
255	0000001000001000	2	0100001000010010	1	1000100100010000	2	0100001000010010	1

Table H.2 - Substitution Conversion Table

8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
0	0000010010000000	4	0000010010000000	4	0100100001001000	2	0100100001001000	2
1	0000100100000000	4	0000100100000000	4	0100100001001000	3	0100100001001000	3
2	0001001000000000	4	0001001000000000	4	0100100000001001	1	0100100000001001	1
3	0000001001000000	4	0100010000000001	1	1000001000000000	4	0100010000000001	1
4	0000000100100000	3	0100100000000010	1	1001000000000100	3	0100100000000010	1
5	0000000010010000	3	0100001000000000	4	1001000000100100	3	0100001000000000	4
6	0000000001001000	3	0100100000000100	2	1001000001001000	3	0100100000000100	2
7	0000000001001000	2	0100000100000000	4	1001000000000100	2	0100000100000000	4
8	0000000010010000	2	0100100010010000	3	1001000000100100	2	0100100010010000	3
9	0000000100100000	2	0100100000100100	2	1001000001001000	2	0100100000100100	2
10	0000010001000000	4	0000010001000000	4	1001001001000000	4	1001001001000000	4
11	0000100010000000	4	0000100010000000	4	1000100001001000	3	1000100001001000	3
12	0001000100000000	4	0001000100000000	4	0100010001001000	3	0100010001001000	3
13	0010001000000000	4	0010001000000000	4	1000100000000100	3	1000100000000100	3
14	0000001000100000	3	0100100000000100	3	1001000010010000	3	0100100000000100	3
15	0000000100010000	3	0100100010010000	2	1001000100100000	3	0100100010010000	2
16	0000000010001000	3	0100001000000001	1	0100100000001000	3	0100001000000001	1
17	0000000001000100	3	0100010000000010	1	0100100010001000	3	0100010000000010	1
18	0000000001000100	2	0100100000100100	3	1001000010010000	2	0100100000100100	3
19	0000000010001000	2	0100100100100000	3	1001000100100000	2	0100100100100000	3
20	0000000100010000	2	0100100100100000	2	0100010001001000	2	0100100100100000	2
21	0000001000100000	2	0100100000010010	1	0100100000001000	2	0100100000010010	1
22	0000010010000001	1	0000010010000001	1	1000100000100100	3	1000100000100100	3
23	0000100100000001	1	0000100100000001	1	1000100010010000	3	1000100010010000	3
24	0001001000000001	1	0001001000000001	1	0100100010001000	2	0100100010001000	2
25	0010010000000001	1	0010010000000001	1	1000100000000100	2	1000100000000100	2
26	0000000001001001	1	0100010000000100	3	1000010000000001	1	0100010000000100	3
27	0000000010010001	1	0100000100000001	1	1000100000000010	1	0100000100000001	1
28	0000000100100001	1	0100010000000100	2	1001000000001001	1	0100010000000100	2
29	0000001001000001	1	0100001000000010	1	1001000000010010	1	0100001000000010	1
30	0000100001000000	4	0000100001000000	4	1000100000100100	2	1000100000100100	2
31	0001000010000000	4	0001000010000000	4	1000100001001000	2	1000100001001000	2
32	0010000100000000	4	0010000100000000	4	0100010000001001	1	0100010000001001	1
33	0000010000100000	3	0000010000100000	3	0100100001001001	1	0100100001001001	1
34	0000001000010000	3	0100010000010010	1	1000100100100000	3	0100010000010010	1
35	0000000100001000	3	0100100000010001	1	1001000000001000	3	0100100000010001	1
36	0000000010000100	3	0100000010000000	4	1001000001000100	3	0100000010000000	4
37	0000010000100000	2	0000010000100000	2	1000001000000001	1	1000001000000001	1
38	0000000010000100	2	0100010000100100	3	1000100010010000	2	0100010000100100	3
39	0000000100001000	2	0100010000100100	2	1000100100100000	2	0100010000100100	2
40	0000001000010000	2	0100100000100010	1	1001000000001000	2	0100100000100010	1
41	0000010001000001	1	0000010001000001	1	1000010000000010	1	1000010000000010	1
42	0000010010000010	1	0000010010000010	1	1000000100000000	4	1000000100000000	4
43	0000100010000001	1	0000100010000001	1	1001000001000100	2	1001000001000100	2
44	0000100100000010	1	0000100100000010	1	1000100000001001	1	1000100000001001	1
45	0001000100000001	1	0001000100000001	1	1001000010001000	3	1001000010001000	3
46	0001001000000010	1	0001001000000010	1	1001000100010000	3	1001000100010000	3
47	0010001000000001	1	0010001000000001	1	1000100000010010	1	1000100000010010	1
48	0010010000000010	1	0010010000000010	1	0100010000001000	3	0100010000001000	3
49	0000000001000010	1	0100100010010001	1	1001000000010001	1	0100100010010001	1
50	0000000010001001	1	0100100001000100	3	1001000000100010	1	0100100001000100	3
51	0000000010010010	1	0100010010010000	3	1001000001001001	1	0100100010010000	3
52	0000000100010001	1	0100100010010000	2	1001000010010001	1	0100100010010000	2
53	0000000100100010	1	0100100001000100	2	1001000100100001	1	0100100001000100	2

| 8-bit byte	State 1 Code Word msb lsb	Next State	State 2 Code Word msb lsb	Next State	State 3 Code Word msb lsb	Next State	State 4 Code Word msb lsb	Next State
54	0000001000100001	1	0100100100100001	1	1001001001000001	1	0100100100100001	1
55	0000001001000010	1	0100100100010000	3	0100001000001001	1	0100100100010000	3
56	0001000001000000	4	0001000001000000	4	1001001000100000	3	1001001000100000	3
57	0010000010000000	4	0010000010000000	4	1001000010001000	2	1001000010001000	2
58	0010010010010000	3	0010010010010000	3	1001000100010000	2	1001000100010000	2
59	0010010001001000	3	0100100100010000	2	0010010001001000	3	0100100100010000	2
60	0010010000100100	3	0010010000100100	3	1001001000100000	2	1001001000100000	2
61	0010010000000100	3	0010010000000100	3	0100001001001000	2	0100001001001000	2
62	0001010001001000	3	0100000010000001	1	0001001001001000	3	0100000010000001	1
63	0001001000100100	3	0001001000100100	3	0100001001001000	3	0100001001001000	3
64	0001001000000100	3	0001001000000100	3	0100010010001000	3	0100010010001000	3
65	0000100100100100	3	0000100100100100	3	0100100100001000	3	0100100100001000	3
66	0000100100000100	3	0000100100000100	3	1000010000000100	3	1000010000000100	3
67	0000100000100000	3	0000100000100000	3	1000010000100100	3	1000010000100100	3
68	0000010010000100	3	0000010010000100	3	1000010001001000	3	1000010001001000	3
69	0000010000010000	3	0000010000010000	3	1000010010010000	3	1000010010010000	3
70	0000001001000100	3	0100001000000100	2	1000100000001000	3	0100001000000100	2
71	0000001000001000	3	0100100000010000	3	1000100010001000	3	0100100000010000	3
72	0000000100100100	3	0100010001000100	3	1000100100010000	3	0100010001000100	3
73	0000000100000100	3	0100000100100100	3	1001000000010000	3	0100000100100100	3
74	0000010000010000	2	0000010000010000	2	1000100001000100	3	1000100001000100	3
75	0001001001001000	2	0100001000000100	3	0001001001001000	2	0100001000000100	3
76	0000010010000100	2	0000010010000100	2	0100010000001000	2	0100010000001000	2
77	0000100000100000	2	0000100000100000	2	0100010010001000	2	0100010010001000	2
78	0010010001001000	2	0100000100000010	1	0010010001001000	2	0100000100000010	1
79	0000100100000100	2	0000100100000100	2	0100100100001000	2	0100100100001000	2
80	0000100100100100	2	0000100100100100	2	1000010000000100	2	1000010000000100	2
81	0001001000000100	2	0001001000000100	2	1000010000100100	2	1000010000100100	2
82	0001001000100100	2	0001001000100100	2	1000010001001000	2	1000010001001000	2
83	0010010000000100	2	0010010000000100	2	1000010010010000	2	1000010010010000	2
84	0010010000100100	2	0010010000100100	2	1000100000001000	2	1000100000001000	2
85	0010010010010000	2	0010010010010000	2	0100010001001001	1	0100010001001001	1
86	0000000100000100	2	0100001000100100	2	1000100001000100	2	0100001000100100	2
87	0000000100100100	2	0100010001000100	2	1000100010001000	2	0100010001000100	2

Annex I   Optimum Power Control

(normative)

I.1   Optimum recording power

The optimum recording powers Pwo, Peo, and Pco depend on the disc, the drive and the recording speed.
The determination of values for Pwo, Peo, and Pco for the actual disc/drive combination at the actual recording speed, is called the Optimum Power Control procedure (OPC procedure).

For a sensitive OPC procedure, the modulation versus power curve m(Pw) shall be determined in a power range with sufficient variation of the modulation as a function of the power (slope $\gamma = (dm/dPw)/(m/Pw)$ between about 0,5 and 2,0; see figure I.1). The OPC procedure determines for the actual disc/drive combination and recording speed, the value P_{target} of the power for which $\gamma = \gamma_{target}$.
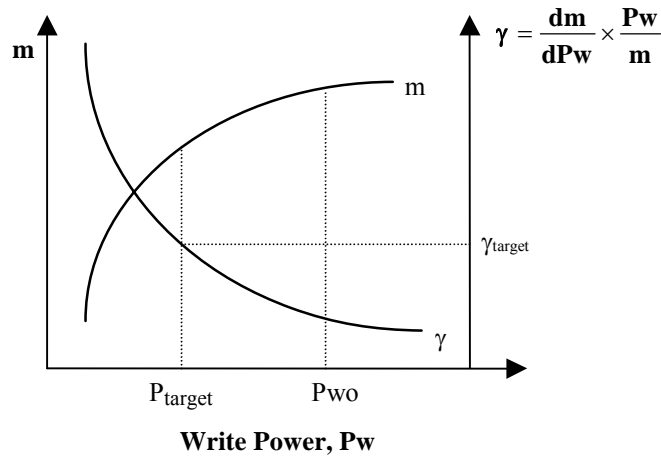
Figure I.1 – Modulation and Gamma functions versus power

To facilitate the OPC procedure, values are provided for P_{IND}, γ_{target}, ρ, ε_1 and ε_2 in the Physical format information. These values can be used as starting values in test recordings for the determination of the actual optimum Pwo, Peo, and Pco.
The relevance of the parameters for determining Pwo, Peo, and Pco is shown in the following formulas and figure I.1:

$m = I_{14}/I_{14H}$	: the modulation amplitude of the HF signal
$\gamma = (dm/dPw) / (m/Pw)$	: the normalized slope of the function m(Pw)
P_{IND}	: indicated estimate for P_{target} in the Physical format information
$P_{target} = Pw(at\ \gamma_{target})$	: the Write power at $\gamma = \gamma_{target}$
ρ	: the multiplication factor to obtain Pwo
$Pwo = \rho \times P_{target}$	: the optimum Write power
ε_1	: the Erase / Write power ratio
ε_2	: the Cooling / Write power ratio
$Peo = \varepsilon_1 \times Pwo$	: the optimum Erase power Peo
$Pco = \varepsilon_2 \times Pwo$	: the optimum Cooling power Pco

I.2 Mathematical model for the modulation versus power function

To minimize the influences of random measuring errors and noise, the modulation versus power curve is approximated by the following function: $m(Pw) = m_{max} \times (1 - \dfrac{P_{thr}}{Pw})$

with m_{max} = max modulation (saturation level) and P_{thr} = threshold power.

The γ value calculated from this approximation is: $\gamma(Pw) = \dfrac{P_{thr}}{Pw - P_{thr}}$

and thus P_{target} is: $P_{t\,arg\,et} = P_{thr} \times (1 + \dfrac{1}{\gamma_{t\,arg\,et}})$

The function f(Pw) = Pw×m(Pw) will result in a straight line: $Pw \times m(Pw) = m_{max} \times (Pw - P_{thr})$

By test recording random 8-to-16 modulated data with different Write powers Pw_i, using $Pe_i = \varepsilon_1 \times Pw_i$ and $Pc = \varepsilon_2 \times \rho \times P_{IND}$, the accompanying modulation values m_i are obtained.

By fitting the straight line $Pw \times m(Pw) = m_{max} \times (Pw - P_{thr})$ to several points (Pw_i, $m_i \times Pw_i$), m_{max} and P_{thr} for these points can be determined easily (one should realize that due to the limited accuracy of the model, m_{max} can take values >1).
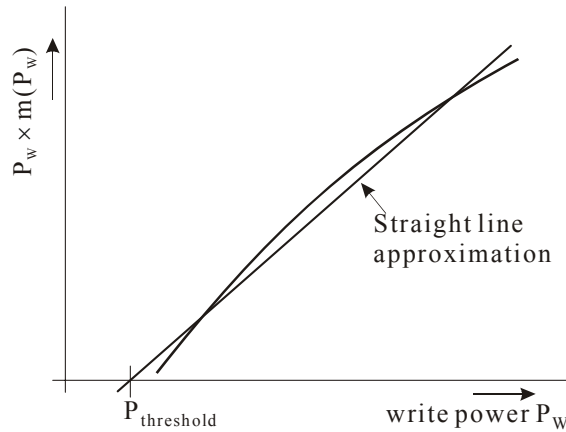

Figure I.2 – Modulation times Power versus Power function

I.3 Procedure for the determination of the media parameters

For determining the values for P_{IND} (indicated value for P_{target}), γ_{target}, ρ, ε_1 and ε_2 in the Physical format information, media manufacturers first have to find the optimum recording powers Pwo, Peo and Pco for their media. This can be done by making test recordings with several combinations of Pw, Pe and Pc and measuring the resulting recorded parameters according to 27.2.2 to 27.2.7, for recording at the maximum, reference, and minimum velocities, and for read-out at the Reference velocity. These measurements shall be made at 23 °C using the optical system in 9.2.

After choosing the combination of Pw = Pwo, Pe = Peo and Pc = Pco, resulting in optimum recorded parameters, the ratios ε_1 = Peo/Pwo and ε_2 = Pco/Pwo are fixed.

Remark 1: The optimum recording powers shall be the powers that give optimum results after 10 DOW cycles.

Note: Because probably not all recorded parameters can be optimized independently, it is up to the media manufacturer to decide about the optimum combination of recorded parameters for his media.

In the next step the other parameters to be specified in the Physical format information have to be determined.
The media manufacturer shall make a choice for the indicated estimate of the target Write power P_{IND}.
The multiplication factor is ρ = Pwo/P_{IND}.

Before determining the γ_{target} value according to the following procedure, the tracks to be used for the measurements shall be erased once by irradiating these tracks using only the Pe power (Pe = $\epsilon_1 \times \rho \times P_{IND}$).

Procedure for determination of the γ_{target} value:

After recording random 8-to-16 data with different Write powers Pw_i ranging from $0,9 \times P_{IND}$ to $1,1 \times P_{IND}$, using $Pe_i = \epsilon_1 \times Pw_i$ and $Pc = \epsilon_2 \times \rho \times P_{IND}$, the resulting modulations m_i are measured. Both the recordings and the measurement of m_i shall be performed on a reference drive according to 9.2 at T=23 °C.

Next the straight line fit according to I.2 is made to the obtained measuring points and γ_{target} can be calculated:

$$\gamma_{target} = \frac{P_{thr}}{P_{IND} - P_{thr}}$$

Remark 2: Because the measurement of the modulation becomes rather inaccurate at low values, the power ranges (and thus P_{IND}) should be chosen such that the modulation at the lowest power value is > 30%.

I.4 Example OPC procedure for drives

By test recording random 8-to-16 data with different Write powers Pw_i, using $Pe_i = \epsilon_1 \times Pw_i$ and $Pc = \epsilon_2 \times \rho \times P_{IND}$, the accompanying modulation values m_i are obtained.

By fitting the straight line: $Pw \times m(Pw) = m_{max} \times (Pw - P_{thr})$ to to several points $(Pw_i, m_i \times Pw_i)$, m_{max} and P_{thr} for these points can be determined easily.

Now P_{target} for a specific power range can be calculated (see H.2) with the help of γ_{target} given in the Physical format information.

Because the mathematical model is only a first order approximation, an interpolation or iteration procedure might be needed to come to a sufficiently accurate value of P_{target}.

The following interpolation procedure is given as an example:

- 2 center power values are chosen for a straight line fit:

  $P_{fit,1} = 0.95 * P_{IND}$ and $P_{fit,2} = 1.05 * P_{IND}$,

- from the measured modulation values m_i at powers Pw_i ranging from

  $0.9 * P_{fit,1}$ to $1.1 * P_{fit,1}$, the accompanying value of $P_{target,1}$ is determined,

- from the measured modulation values m_i at powers Pw_i ranging from

  $0.9 * P_{fit,2}$ to $1.1 * P_{fit,2}$, the accompanying value of $P_{target,2}$ is determined,

- now P_{target} is calculated from the intersection of the line through the points $(P_{target,1}, P_{fit,1})$ and

  $(P_{target,2}, P_{fit,2})$ with the line represented by $P_{target} = P_{fit}$,

  resulting in: $P_{target} = \dfrac{P_{target,2} \times P_{fit,1} - P_{target,1} \times P_{fit,2}}{P_{target,2} - P_{target,1} - P_{fit,2} + P_{fit,1}}$

the final accuracy, if needed, can be improved by a number of iterations.

Now Pwo, Peo and Pco are obtained by (ρ, ϵ_1, ϵ_2 as given in the Physical format information):

   Pwo = $\rho \times P_{target}$

   Peo = $\epsilon_1 \times$ Pwo

   Pco = $\epsilon_2 \times$ Pwo

Remark 3: The OPC procedure should be performed in an area on the disc that is specially reserved for this purpose: The Drive Test Zone or the Disc Test Zone. It is recommended to use for each OPC procedure a randomly chosen location in these areas.

To increase the reliability of the OPC results it is strongly recommended to initialize the Drive Test Zones and the Disc Test Zones before using these areas by recording them with all (00) data using the following write power settings derived from the Physical format information: Pw = $\rho \times P_{IND}$, Pe = $\epsilon_1 \times$ Pw and Pc = $\epsilon_2 \times$ Pw, or by using some optimum write power settings determined by the drive.

Remark 4: Before the OPC procedure, the tracks to be used (also on blank discs), shall be erased by irradiating the tracks using only the Pe power (Pe = $\epsilon_1 \times \rho \times P_{IND}$). After the OPC procedure the used tracks shall be overwritten with nominal power using Sectors with all Main Data set to (00) and correct address information (ID + IED).

I.5 Media margins under different overwrite conditions

To guarantee correct data interchange in case of overwriting at different speeds, the disc shall be tested in the following way:

- the blank disc is first recorded one time at 11,5 m/s (3,3x) with the optimum Write powers as determined by the OPC procedure as described in this annex,

- the recorded information is overwritten one time at 27,9 m/s (8x) with $0,93\times$ the optimum Write powers as determined by the OPC procedure as described in this annex,

- as a result the total number of PI errors before correction in any 8 consecutive ECC Blocks shall not exceed 280 (see 29.2).

As well the recordings as the measurements shall be performed with a Reference drive as defined in clause 9 and Annex E.

I.6 Media margins at non-optimum Write power

To create some margins for practical accuracy requirements for drive implementations, the disc should allow for some deviations of the Write power from the optimum values.

For actual Write powers Pw in the range of Pw_{min} to Pw_{max}, where $Pw_{min} \leq 0,90 \times Pwo$, $Pw_{max} \geq 1,07 \times Pwo$ and $Pw_{max} - Pw_{min} \geq 0,20 \times Pwo$, and $Pe = \varepsilon_1 \times Pw$ and $Pc = \varepsilon_2 \times Pw$, with ε_1 and ε_2 according to the nominal values as indicated in 14.4.2, the disc shall fulfill all specifications at 10 DOW cycles.

Additionally the jitter shall stay below 10% for any number of overwrites up to 500 DOW cycles when recording with Pwo.

Furthermore it is recommended that the disc can be overwritten at least 1 000 times, while all parameters stay within their specified ranges.

Annex J   Logical to Physical address translation
(normative)

The Logical to Physical address translation might be depending on an applied Defect Management system. Consequently the physical addresses of the start and the ending of the Logical Sector Numbering can be different from the values specified in clause 20.

This page is intentionally left blank

Annex K   Explanation about the usage of the reference servos

(informative)

In the DVD+R/+RW system descriptions the function of the reference servo is meant as a measuring system to determine some of the (dynamical) mechanical characteristics of the disc, which are important for the design of practical servo systems in commercial drives.

Such practical implementations shall enable the drive to follow the mechanical deviations of the disc within rather small limits, to ensure the quality of the recordings made on the disc and of the read-out signals from such recordings. In general the tracking errors in the axial direction shall be smaller than 0,20 μm and the tracking errors in the radial direction shall be smaller than 0,045 μm.

K.1   Approximation of servo behavior

The tracking properties of a typical second order servo can be expressed by the following formula:

$$E(f) \approx c \times \left(\frac{f}{f_0}\right)^2 \times X(f) \quad \left(\text{for } f << f_0\right), \text{ where} \tag{1}$$

E(f) is the tracking error for frequency f,

X(f) represents the amplitude of the related deviations,

f is the frequency of the deviations,

f_0 is the frequency where the open-loop transfer function of the servo crosses the 0 dB axis,

c is a constant, which typically = 3.

Assuming displacements that can be represented by sinusoidal components

$$x(t) = X(f) \times \cos(2\pi \times f \times t) \tag{2}$$

it can be seen that the amplitude of the accelerations related to such displacements increase quadratically with the frequency of the displacements:

$$\alpha(f) = \left(2\pi \times f\right)^2 \times X(f) \tag{3}$$

In these relations the frequency f of the deviations is proportional to the speed of the recording layer of the disc relative to the optical pick-up head of the drive. As a result, the accelerations will increase quadratically with the actual running speed of the disc.

K.1.1   Limitations of servo systems

In general servo systems have two limitations:

- the stroke of the actuator is limited (X_{limit}), determining the maximum allowed X(f),

- the acceleration of the actuator is limited (α_{limit}), determining the maximum allowed α (f).

At low frequencies α (f) will be small because of (3) and thus X(f) will be the limiting factor.

In the main part of the frequency characteristic of a practical servo system, from about $f = \frac{1}{2\pi} \sqrt{\frac{\alpha_{limit}}{X_{limit}}}$ upto

about f_0, α (f) will be the limiting factor. By using the above formulas (1) and (3), the following relation between the maximum acceleration and the maximum allowed tracking error e_{max} can be determined (for $f < f_0$):

$$\alpha_{max}(f) = \frac{\left(2\pi \times f_0\right)^2}{c} \times e_{max} \tag{4}$$
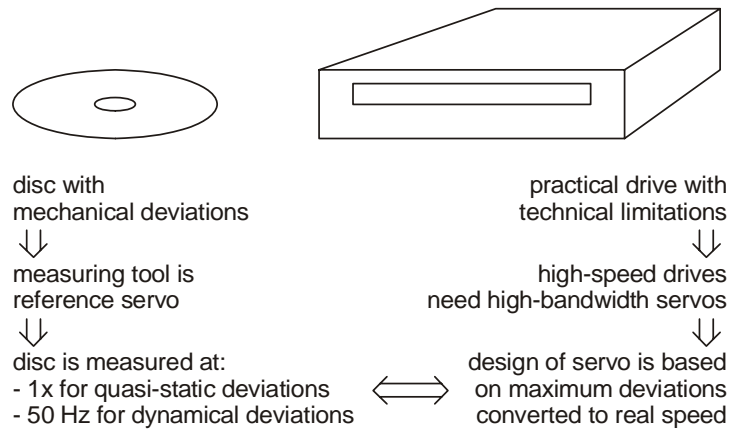
For frequencies above f_0 the servo system is not able to track any deviations, meaning that the deviations by themselves must be sufficiently small.

K.2 Considerations for practical measurements and practical servo implementations

From the above approximations we see that at higher rotational speeds the consequences of deviations $x(t)$ on the disc, such as tracking error and accelerations, increase quadratically with the speed (frequency), causing (too) severe requirements for practical servo implementations. For optimum system performance a good balance between disc specifications and drive capabilities is needed. At higher rotational speeds more severe requirements for the disc are needed to facilitate practical bandwidth values for the servos in the drive.

However when measuring at the normal 1x conditions, such smaller disc deviations would lead to very small and consequently noisy error signals. By increasing the measurement speed to 50 Hz CAV and keeping the reference servo the same, the errors E(f) will be larger and can be determined more accurately.

Another advantage is that such a measurement condition is much closer to the realistic situation in a practical drive. At higher rotational speeds, the "dynamic" deviations are more important than the "static" deviations which might be reduced due to stretching effects of the disc (such stretching effects especially have a positive influence on the axial deviations).

disc with
mechanical deviations
⇓
measuring tool is
reference servo
⇓
disc is measured at:
- 1x for quasi-static deviations
- 50 Hz for dynamical deviations

practical drive with
technical limitations
⇓
high-speed drives
need high-bandwidth servos
⇓
design of servo is based
on maximum deviations
converted to real speed

Figure K.1 – Illustration of disc measurement and drive design

K.2.1 Translation of characteristics to other speeds

For designing practical servo systems, needed to handle the discs at their aimed recording speed, the results measured at 1x CLV and 50 Hz CAV have to be translated to the related actual rotational speed of the disc. In this respect the acceleration is about the most useful parameter and, as has been seen, this is quadratically dependent on the rotational speed of the disc. Although not accurate, because the stretching effects that will make a disc appear more flat at higher rotational speeds are not taken into account, the following relation for the amplitudes of the accelerations at some specific radius R gives a good first order approximation:

$$\frac{\alpha_{\text{at actual speed}}}{\alpha_{\text{at measurement speed}}} = \left(\frac{v_{\text{act}}}{v_{\text{meas}}} \right)^2 \tag{5}$$

in which v_{meas} = the Reference velocity (3,49 m/s) for the 1x CLV measurement condition,

or $v_{\text{meas}} = 2\pi \times 50 \times R$ for the 50 Hz CAV measurement condition,

and in which $v_{\text{act}} = n \times 3,49$ m/s in case of CLV applications (see also 9.5),

or $v_{\text{act}} = 2\pi \times f_{\text{rot}} \times R$ in case of CAV applications.

From the $\alpha_{\text{at actual speed}}$ the needed bandwidth now can be calculated:

$$f_0 = \frac{1}{2\pi} \sqrt{\frac{c \times \alpha_{\text{act}}}{e_{\text{max}}}} , \tag{6}$$

where e_{max} is the maximum acceptable tracking error for good recording properties.

K.3 Example calculations for axial tracking

The following tables show the requirement under the measurement condition and the accelerations as can be derived from this requirement for the measurement condition, for the 1x reference speed, and for the real application speed (with the help of the indicated formulas).

K.3.1 Basic requirements for all discs

All discs for all recording speeds have to fulfill the basic requirements measured at 1x Reference velocity (CLV). Because of the relatively low rotational speeds these measurements reflect the (quasi-)static deviations of the disc.

Axial run-out $\leq 0,3$ mm and **axial residual tracking error $\leq 0,13$ μm**

This requirement corresponds to a maximum allowed acceleration of 8 m/s^2, which in its turn requests for an actual servo bandwidth of $f_0 = 1,7$ kHz, needed to reach a maximum residual tracking error $e_{max} \leq 0,20$ μm under 1x application conditions.

K.3.2 Additional requirements for all discs able to be recorded at speeds above 4x

All discs suited for recording speeds > 4x shall fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Up to 8x speed most of the disc is still recorded in CLV mode, which means that an increase in axial deviation towards the outer diameter can be allowed (rotational speed reduces towards outer diameter).

Axial residual tracking error $\leq 0,20$ μm for radii ≤ 29 mm
and $\leq 0,20 \times (r / 29)^2$ μm for radii ≥ 29 mm

	speed			radius 24 mm	radius 29 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement		$e_{max} \leq 0,20$ μm	$e_{max} \leq 0,20$ μm	$e_{max} \leq 0,80$ μm
		α_{max}	(4)	12 m/s^2	12 m/s^2	48 m/s^2
reference speed	1x	α_{max}	(5)	2,6 m/s^2	1,8 m/s^2	1,8 m/s^2
application conditions	3,3x	α_{max}	(5)	28 m/s^2		
		f_0 needed for real $e_{max} \leq 0,20$ μm	(6)	3,3 kHz		
	6x	α_{max}	(5)	92 m/s^2		
		f_0 needed for real $e_{max} \leq 0,20$ μm	(6)	5,9 kHz		
	8x	α_{max}	(5)	---	113 m/s^2	113 m/s^2
		f_0 needed for real $e_{max} \leq 0,20$ μm	(6)	---	6,5 kHz	6,5 kHz

K.4 Example calculations for radial tracking

The following tables show the requirement under the measurement condition and the accelerations as can be derived from this requirement, for the measurement condition, for the 1x reference speed, and for the real application speed (with the help of the indicated formulas).

K.4.1 Basic requirements for all discs

All discs for all recording speeds have to fulfill the basic requirements measured at 1x Reference velocity (CLV). Because of the relatively low rotational speeds these measurements reflect the (quasi-)static deviations of the disc.

Radial run-out ≤ 35 μm and **radial residual tracking error $\leq 0,015$ μm**

This requirement corresponds to a maximum allowed acceleration of 1,1 m/s^2, which in its turn requests for an actual servo bandwidth of $f_0 = 2,0$ kHz, needed to reach a maximum residual tracking error $e_{max} \leq 0,022$ μm under 1x application conditions.

K.4.2 Additional requirements for all discs able to be recorded at speeds above 4x

All discs suited for recording speeds > 4x shall fulfill the following additional requirements measured at 50 Hz rotational speed (CAV). Up to 8x speed most of the disc is still recorded in CLV mode, which means that an increase in radial deviation towards the outer diameter can be allowed (rotational speed reduces towards outer diameter).

Radial residual tracking error $\leq 0,025$ μm for radii ≤ 29 mm
and $\leq 0,025 \times (r / 29)^2$ μm for radii ≥ 29 mm

	speed		radius 24 mm	radius 29 mm	radius 58 mm
measurement condition	50 Hz CAV	requirement	$e_{max} \leq 0,025$ μm	$e_{max} \leq 0,025$ μm	$e_{max} \leq 0,100$ μm
		α_{max} (4)	1,9 m/s^2	1,9 m/s^2	7,5 m/s^2
reference speed	1x	α_{max} (5)	0,40 m/s^2	0,27 m/s^2	0,27 m/s^2
application conditions	3,3x	α_{max} (5)	4,4 m/s^2		
		f_0 needed for real $e_{max} \leq 0,045*$ μm (6)	2,7 kHz		
	6x	α_{max} (5)	14,4 m/s^2		
		f_0 needed for real $e_{max} \leq 0,045*$ μm (6)	4,9 kHz		
	8x	α_{max} (5)	---	17,6 m/s^2	17,6 m/s^2
		f_0 needed for real $e_{max} \leq 0,045*$ μm (6)	---	5,4 kHz	5,4 kHz

* at speeds > 1x a larger tracking error is allowed

Annex L   Measurement of the groove wobble amplitude

(informative)

L.1   Relation between normalized wobble signal and wobble amplitude

The wobble amplitude in nm cannot easily be measured directly. However, it can be derived from the normalized wobble signal. The theoretical results for such a derivation are given below.

The peak value of the wobble signal I_W can be seen as:

$$I_{Wp} = A \times \sin(2 \times \pi \times a / p)$$

where:

a = wobble amplitude in nm

p = track pitch of the radial error signal

A = the peak value of the radial error signal

In figure L.1 the parameters a, p, A and I_{Wp} are shown. The groove has a peak displacement of 'a' (wobble amplitude) from the averaged centre of the groove to the actual centre of the groove. The normalized wobble signal can now be defined as:

$$\frac{I_{Wpp}}{(I_1 - I_2)_{pp}} = \frac{2 \times I_{Wp}}{2 \times A} = \sin\left(2 \times \pi \times \frac{a}{p} \right)$$

where

$$(I_1 - I_2)_{pp} = 2 \times A$$

The wobble signal I_W is not only dependent on the wobble amplitude a, but also the track pitch p. Due to normalization, dependencies on groove geometry, spot shape and optical aberrations have been eliminated.

L.2   Tolerances of the normalized wobble signal

From the above formulae for the normalized wobble signal, the tolerances as given in 25.4 can be converted to nm for a given track pitch of 'p' = 0,74 μm.

Lower limit: 0,20 corresponds to a = 24 nm.
Upper limit: 0,30 corresponds to a = 36 nm.
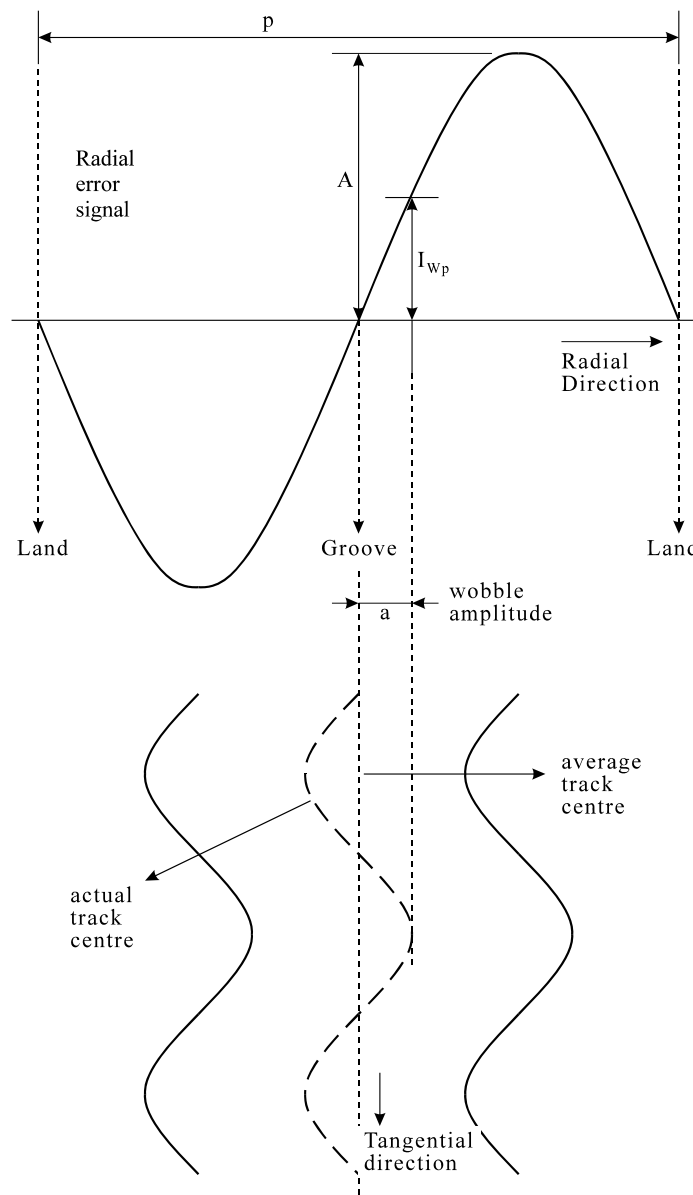
Figure M.1 - Wobble amplitude of the groove

Annex M   Transportation

(informative)

M.1   General

As transportation occurs under a wide range of temperature and humidity variations, for differing periods, by many methods of transport and in all parts of the world, it is not practical to specify mandatory conditions for transportation or for packaging.

M.2   Packaging

The form of packaging should be agreed between sender and recipient or, in absence of such an agreement, is the responsibility of the sender. It should take into account the following hazards.

M.2.1   Temperature and humidity

Insulation and wrapping should be designed to maintain the conditions for storage over the estimated period of transportation.

M.2.2   Impact loads and vibrations

a)   Avoid mechanical loads that would distort the shape of the disc.

b)   Avoid dropping the disc.

c)   Discs should be packed in a rigid box containing adequate shock-absorbent material.

d)   The final box should have a clean interior and a construction that provides sealing to prevent the ingress of dirt and moisture.

This page is intentionally left blank

Annex N   How to use the Physical format information in ADIP

(informative)

To fully exploit the Physical format information in the ADIP, the following rules are given as a recommended guideline (see also the flowchart).

Drives should read the ADIP and check for the following information:

1) check the Disc Category in byte 0
   ⇒ determine if the disc is a DVD+R or DVD+RW disc, also check if the disc is a single layer or a dual layer disc; use the related book (see clause 3) for further interpretations.

Drives shall respect the Disc Application Code:

2) check the Disc Application Code in byte 17
   ⇒ if the drive is not able to obey the rules related to a specific Disc Application Code, the drive shall block the disc for recording.

If the drive can do "media recognition" (i.e. the drive can uniquely determine the manufacturer and the type of the disc and has optimum sets of write parameters for certain discs in its memory):

3) check for Disc Manufacturer and Media Type ID (bytes 19 to 29)
   ⇒ choose the optimum write strategy for this specific media from the drive's memory.

If the drive fails to recognize the media:

4) check the version number in byte 0
   ⇒ if the version number is unknown: do not use the contents of bytes 32 to 63,
   ⇒ if the version number is known: interpret bytes 32 to 63 according to the correct book version.

5) check byte 18 for the presence of Extended Information blocks
   ⇒ if no EI blocks are present: only basic write strategy is available.

If EI blocks present:

6) check the Format number in each present EI block
   ⇒ if the Format number is unknown: do not use the contents of the related EI block,
   ⇒ if the Format number is known: interpret the EI block according to the correct book version.

Now the drive can choose the best fitting recording speed and write strategy from the available options:

   ⇒ write strategy from one of the known EI blocks,
   ⇒ for each available write strategy the drive should check the actually supported recording speeds indicated in the related bytes (supported recording speeds can be adapted in future versions of this document).
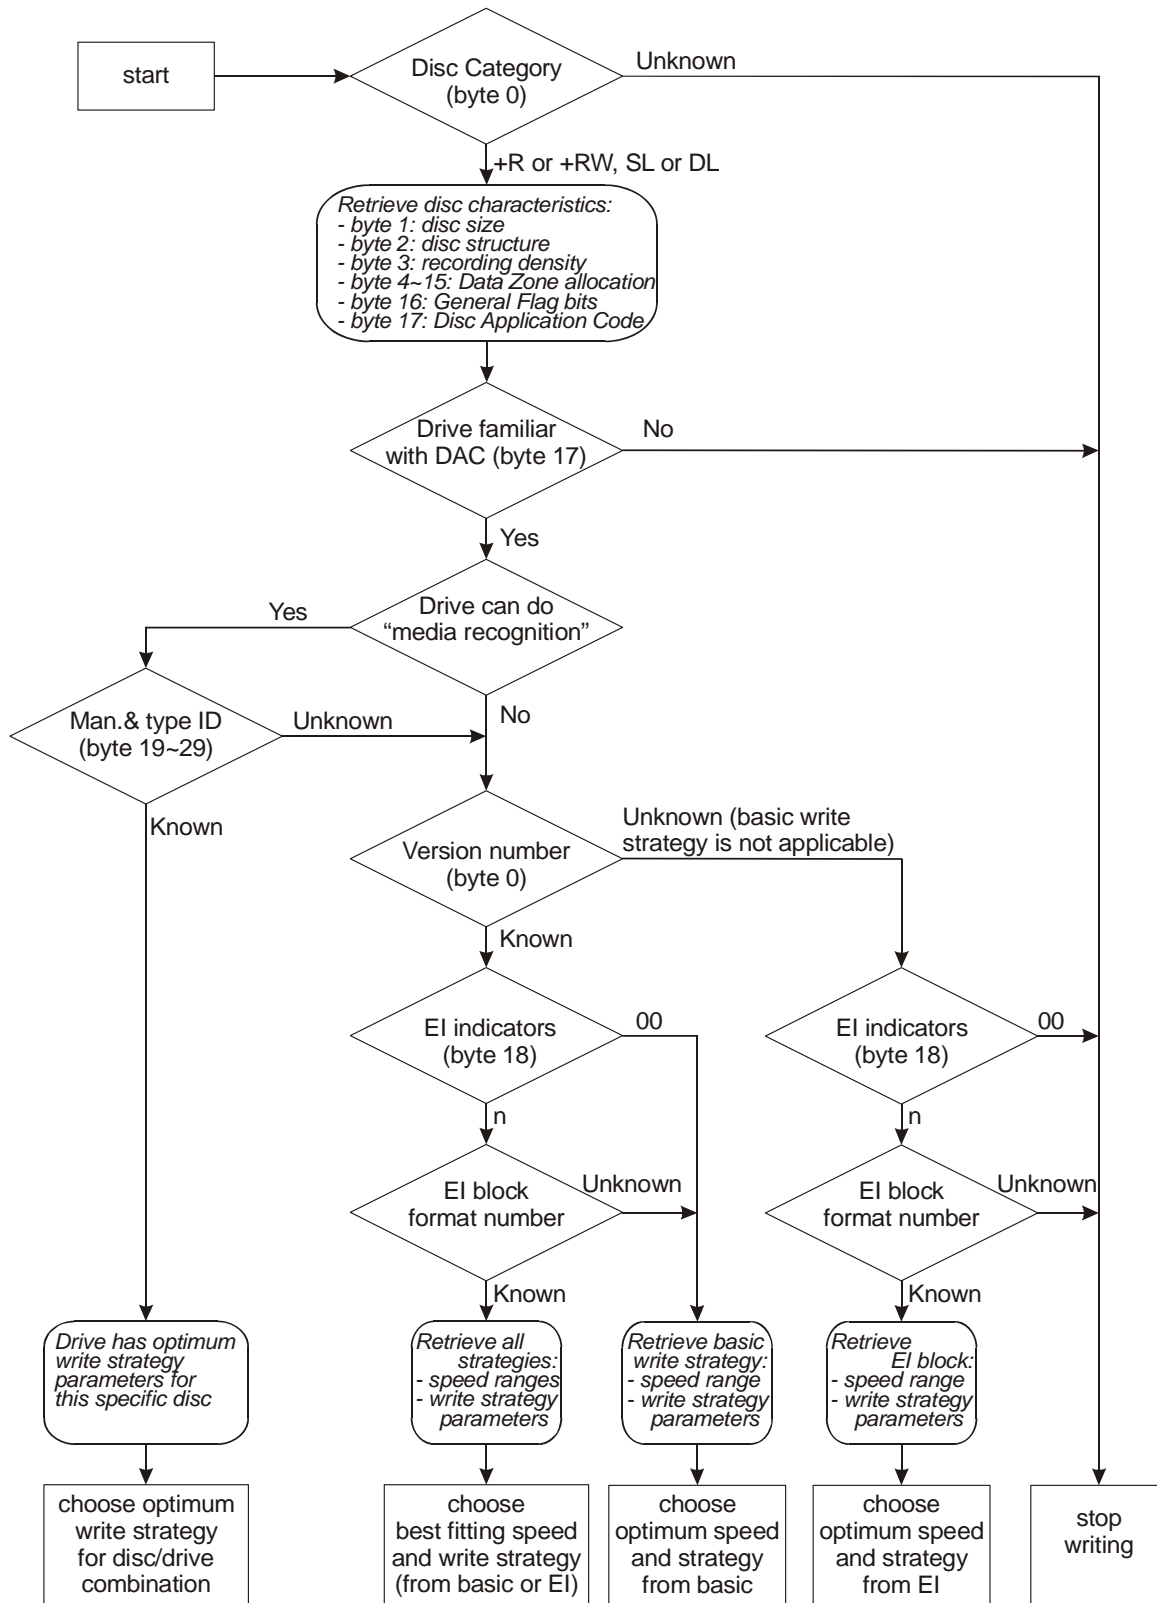
Figure N.1 - Flowchart showing the use of Physical format information in ADIP

Annex O   Values to be Implemented in Existing and Future Specifications

(informative)

The values for bytes which this System Description specifies are related to ReWritable discs which are in conformance with this System Description, viz. DVD+RW Format discs. It is expected that other categories of DVD discs will be standardized in future. It is therefore recommended that the following values be used for these other DVD discs. Further possible bit patterns are intended for future standardization.

All standards are subject to revisions, so the information in this annex can be subject to changes. Therefore it is recommended to check this information against the most recent edition of the indicated standards.

Identification Data

Bit b_{31} shall be set to
ZERO, indicating CLD format
ONE, indicating Zoned format

Bit b_{30} shall be set to
ZERO, indicating pit tracking
ONE, indicating groove tracking

Bit b_{29} shall be set to
ZERO if the reflectance is greater than 40 % with a PBS optical system
ONE if the reflectance is less than 40 % with a PBS optical system

Bit b_{28} Reserved, shall be set to ZERO

Bits b_{27} to b_{26} shall be set to
ZERO ZERO in the Data Zone
ZERO ONE in the Lead-in Zone
ONE ZERO in the Lead-out Zone
ONE ONE in the Middle Zone

Bit b_{25} shall be set to
ZERO, indicating read-only data
ONE, indicating other than read-only data

Bit b_{24} shall be set to
ZERO on Layer 0 of DL discs,
ONE on Layer 1 of DL discs,
ZERO on SL discs.

Bits b_{23} to b_0 shall specify the Physical Sector Number

Physical format information in the Lead-in Zone

Byte 0 - Disc Category and Version Number

Bits b_7 to b_4 shall specify the Disc Category

if set to 0000, they indicate a DVD - Read-Only disc (DVD-RO)
if set to 0001, they indicate a DVD Rewritable disc (DVD-RAM)
if set to 0010, they indicate a DVD Recordable disc (DVD-R)
if set to 0011, they indicate a DVD Re-recordable disc (DVD-RW)
if set to 1001, they indicate a DVD+RW Single Layer disc
if set to 1010, they indicate a DVD+R Single Layer disc
if set to 1101, they indicate a DVD+RW Dual Layer disc
if set to 1110, they indicate a DVD+R Dual Layer disc

Bits b_3 to b_0 shall specify the Version Number. Together with b_7 to b_4 they specify the related document.

if b_7 to b_4 set to 0000 and b_3 to b_0 set to 0001, they specify ECMA Standard 267/268 (DVD-RO)
if b_7 to b_4 set to 0001 and b_3 to b_0 set to 0001, they specify ECMA Standard 272 (DVD-RAM 2,6 GB)
if b_7 to b_4 set to 0001 and b_3 to b_0 set to 0110, they specify ECMA Standard 330 (DVD-RAM)
if b_7 to b_4 set to 0010 and b_3 to b_0 set to 0001, they specify ECMA Standard 279 (DVD-R 3,95 GB)
if b_7 to b_4 set to 0010 and b_3 to b_0 set to 0101, they specify ECMA Standard 359 (DVD-R)
if b_7 to b_4 set to 0011 and b_3 to b_0 set to 0010, they specify ECMA Standard 338 (DVD-RW)
if b_7 to b_4 set to 1001 and b_3 to b_0 set to 0001, they specify ECMA Standard 274(+RW 3,0 GB)

if b_7 to b_4 set to 1001 and b_3 to b_0 set to 0010,
  they specify the DVD+RW System Specification, part 1, volume 1 (SL, 2,4x & 4x) (ECMA 337)

if b_7 to b_4 set to 1001 and b_3 to b_0 set to 0011,
  they specify this document (DVD+RW System Specification, part 1, volume 2 (SL, 8x)) (ECMA 371)

if b_7 to b_4 set to 1010 and b_3 to b_0 set to 0001,
  they specify the DVD+R System Specification, part 1, volume 1 (SL, 1x to 16x) (ECMA 349)

if b_7 to b_4 set to 1101 and b_3 to b_0 set to 0001,
  they specify the DVD+RW System Specification, part 2, volume 1 (DL, 2,4x) (ECMA 374)

if b_7 to b_4 set to 1110 and b_3 to b_0 set to 0001,
  they specify the DVD+R System Specification, part 2, volume 1 (DL, 2,4x & 3,3~8x & 6,6x~16x) (ECMA 364)

Byte 1 - Disc size and maximum transfer rate

Bits b_7 to b_4 shall specify the disc size
if set to 0000, they specify a 120 mm disc
if set to 0001, they specify an 80 mm disc

Bits b_3 to b_0 shall specify the maximum transfer rate
if set to 0000, they specify a maximum transfer rate of 2,52 Mbits/s
if set to 0001, they specify a maximum transfer rate of 5,04 Mbits/s
if set to 0010, they specify a maximum transfer rate of 10,08 Mbits/s
if set to 1111, they specify no maximum transfer rate is specified.

Byte 2 - Disc structure

Bit b_7 shall be set to ZERO.

Bits b_6 and b_5 shall specify the disc Type

if set to 00, they specify a single recording layer per side
if set to 01, they specify two recording layers per side

Bit b_4 shall specify the track path

if set to ZERO, it specifies PTP on DL discs or a SL disc,
if set to ONE, it specifies OTP on DL discs

Bits b_3 to b_0 specify the layer type

Bit b_3 shall be set to ZERO

Bit b_2 if set to
ZERO, shall specify that the disc does not contain re-writable Data Zones
ONE , shall specify that the disc contains re-writable Data Zones

Bit b_1 if set to
ZERO, shall specify that the disc does not contain recordable Data Zones
ONE , shall specify that the disc contains recordable Data Zones

Bit b_0 if set to
ZERO, shall specify that the disc does not contain embossed Data Zones
ONE, shall specify that the disc contains embossed Data Zones

Byte 3 - Recording density

Bits b_7 to b_4 shall specify the average Channel bit length
if set to 0000, they specify 0,133 μm
if set to 0001, they specify 0,147 μm
if set to 0010, they indicate that this average length is in the range 0,205 μm to 0,218 μm
if set to 1000, they specify 0,176 37 μm

Bits b_3 to b_0 shall specify the average track pitch
if set to 0000, they indicate a track pitch of 0,74 μm
if set to 0001, they indicate a track pitch of 0,80 μm

This page is intentionally left blank

List of Changes

Differences between System Description DVD+RW 4,7Gbytes:

        Basic Format Specifications, part 1, volume 2, version 1.01, September, 2007

and   Basic Format Specifications, part 1, volume 2, version 1.0, December, 2004

Main changes:

- this System Description does not include any major changes,
- the following list shows minor changes that may be relevant for the system,
- trivial corrections and minor editorial changes are not mentioned.

page	clause	version 1.01	version 1.0	remarks
2	3	*References have bee updated*	---	editorial
3	4.15	**Reference velocity** The reference velocity is the linear velocity that results in the nominal Channel bit rate of 26,156 25 Mbit/s	---	definition added
9	9.8	*Reference servos raised one chapter level*	---	clarification
16	11.4.1 & 11.4.2	*Tracking requirements to be measured on blank discs*	---	clarification
17	11.5.1 & 11.5.2	*Tracking requirements to be measured on blank discs*	---	clarification
35	14.4.2.1	Byte 0 – bits b3 to b0: *version number 0000 may be used for test discs*	Byte 0 – bits b3 to b0: ---	extension
35	14.4.2.1	Byte 16 – bit b5: *reserved for use in Control Data Zone* bit b4 to b0: 0 0000	Byte 16 – bit b5 to b0: 00 0000	extension
51	Fig 23	Buffer Zone 2 521 Physical Sectors ---	Buffer Zone 2 512 Physical Sectors with Main Data set to (00)	may be used for VCPS
53	18.8.1	Byte 16: *bit b5 used for indication of VCPS*	Byte 16: *bits b5 was 0*	extension
54	Fig 25	Buffer Zone 3 768 Physical Sectors with Main Data set to (00)	Buffer Zone 3 768 Physical Sectors ---	shall be filled with (00)
54	Fig 25	Reserved Zone 4 4 096 Physical Sectors with Main Data set to (00)	Reserved Zone 4 4 096 Physical Sectors ---	shall be filled with (00)

page	clause	version 1.01	version 1.0	remarks
54	Fig 25	Guard Zone 3 nominal 24 400 Physical Sectors with Main Data set to (00)	Guard Zone 3 24 400 Physical Sectors with Main Data set to (00)	Guard Zone 3 may be left unrecorded
55	19.7	Guard Zone 3 This zone shall be filled with Main Data set to (00) or may be left unrecorded.	Guard Zone 3 This zone shall be filled with Main Data set to (00). This zone shall contain 24 400 Physical Sectors.	Guard Zone 3 may be left unrecorded
57	21.2.2	... When an eject is requested during background De-icing, the drive may add a Temporary Lead-out Zone immediately following the last written ECC Block in the Data Zone (no unrecorded areas shall be present between the Lead-in Zone and such Temporary Lead-out Zone) according to the rules in 21.3 and the drive shall update the FDCB before ejecting the disc.	... When an eject is requested during background De-icing, the drive shall update the FDCB before ejecting the disc.	clarification
58	21.3	When a disc is going to be used for sequential recording without formatting, it shall be initialized in the same way as for Background formatting (see 21.2.1) and as long as there are unrecorded areas, the FDCB shall be used in the same way as during the De-icing process (see 21.2.2).	---	clarification
59	22.1	*Note: If any damaged DCB is replaced at an other location, the original location shall be overwritten with a DCB with the Content Descriptor set to (FFFFFFFE) and all remaining bytes set to (00). The List of DCBs (see 22.2, Physical Sector 0 / bytes D_{128} to D_{191}) shall be updated accordingly.*	---	to prevent accidental reading of such block by a drive with better reading performance
63	22.2	Physical Sectors 0 / bytes D52 to D55: these 4 bytes shall indicate the last PSN of the last ECC Block of the contiguously verified part of the Data Zone starting from address (030000).	Physical Sectors 0 / bytes D52 to D55: these 4 bytes shall indicate the last address of the contiguously verified area starting from address (030000).	clarification

page	clause	version 1.01	version 1.0	remarks
63	22.2	Physical Sectors 0 / bytes D56 to D59: these 4 bytes shall indicate the first PSN of the first ECC Block represented in the Formatting bitmap. This value shall be $\geq$ (00030000) and less than the Last Written Address.	Physical Sectors 0 / bytes D56 to D59: these 4 bytes shall indicate the address of the first ECC Block represented in the Formatting bitmap. This value shall be $\geq$ (00030000) and less than or equal to the Last Written Address.	clarification
102	G.1	... shall be = 0 (no "cooling gap") or $\geq$ 0,8 ns.	... shall be = 0 (no "cooling gap") or $\geq$ 1,0 ns.	improved margins
130	Annex N	Byte 0: *update of all DVD systems*	---	clarification

This page is intentionally left blank

Amendments for DVD+R/+RW System Descriptions

Applicable to

- DVD+R:
  DVD+R 4.7 Gbytes, part 1: Single Layer, volume 1: 1X to 16X Basic Format
  Specifications version 1.31, September 2007
- DVD+RW:
  DVD+RW 4.7 Gbytes, part 1: Single Layer, volume 1: 2,4X & 4X Basic Format
  Specifications version 1.31, September 2007
- DVD+RW HS:
  DVD+RW 4.7 Gbytes, part 1: Single Layer, volume 2: 8X Basic Format Specifications
  version 1.01, September 2007
- DVD+R DL:
  DVD+R 8.5 Gbytes, part 2: Dual Layer, volume 1: 2,4X to 16X Basic Format
  Specifications version 1.21, September 2007
- DVD+RW DL:
  DVD+RW 8.5 Gbytes, part 2: Dual Layer, volume 1: 2,4X Basic Format
  Specifications version 1.01, September 2007

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

3 References

Added text:

AACS: Advanced Access Content System (AACS), Blu-ray Disc Recordable Book,
    AACS LA LLC.

AVCREC: System Description AVCREC Rewritable Format, Blu-ray Disc Association.

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

4 Definitions

Added text:

AACS

AACS defines a method to prevent unauthorized copying and/or redistribution of video data that
is recorded in the AVCREC Video Format.

DVD+RW, DVD+RW HS, DVD+RW DL, DVD+R and DVD+R DL:

14.4.2.1 General information – Bytes 0 to 31

Byte 16 – General Flag bits

Text to be replaced:

Bits b_4 to b_0 are reserved and shall be set to 0 0000

New text:

Bit b_4 is reserved for use in the Control Data Zone and shall be set to ZERO
Bits b_3 to b_0 are reserved and shall be set to 0000

DVD+RW and DVD+RW HS: **17.11.1 Physical Format information**
DVD+RW DL: **17.10.1 Physical Format information**
DVD+R and DVD+R DL: **18.8.1 Physical Format information**

Byte 16 – General Flag bits

Text to be replaced:
Bits b_4 to b_0 same as 14.4.2

New text:
Bit b_4 shall specify if Buffer Zone 2 in the Lead-in Zone contains AACS related information,
it shall be set to 0, indicating no AACS related information is present in Buffer Zone 2,
it shall be set to 1, indicating Buffer Zone 2 contains AACS related information as defined
in the AACS System Description (see clause 3)

Bits b_3 to b_0 same as 14.4.2

DVD+R and DVD+R DL: **18.8.1 Physical Format information**

Byte 16 – General Flag bits

Text to be replaced:
*Note: When closing the first Session, drives not designed to handle VCPS might set bit $b_5 = 0$ even
when Buffer Zone 2 contains VCPS related information (recorded before by some other drive).*

New text:
*Note: When closing the first Session, drives not designed to handle VCPS or AACS might set bit b_5
and/or bit $b_4 = 0$ even when Buffer Zone 2 contains VCPS or AACS related information (recorded
before by some other drive).*

DVD+RW and DVD+RW HS: **17.12 Buffer Zone 2**
DVD+RW DL: **17.11 Buffer Zone 2**

Text to be replaced:
This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the
disc VCPS related information may be recorded to these 32 ECC Blocks, according to the
specifications given in the VCPS System Description (see clause 3). If no VCPS related information
is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all
(00).

New text:
This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the
disc VCPS or AACS related information may be recorded to these 32 ECC Blocks, according to the
specifications given in the VCPS System Description respectively the AACS System Description
(see clause 3). Such VCPS or AACS related information shall only be recorded when requested by
the host/application. If no VCPS or AACS related information is copied to these locations then the
Main Data of the Data Frames in this Zone shall be set to all (00).

DVD+R and DVD+R DL: **18.9   Buffer Zone 2**

Text to be replaced:
This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description (see clause 3). Such VCPS related information shall only be recorded when requested by the host/application. If no VCPS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

New text:
This recorded Zone shall consist of 512 Physical Sectors from 32 ECC Blocks. During use of the disc VCPS or AACS related information may be recorded to these 32 ECC Blocks, according to the specifications given in the VCPS System Description respectively the AACS System Description (see clause 3). Such VCPS or AACS related information shall only be recorded when requested by the host/application. If no VCPS or AACS related information is copied to these locations then the Main Data of the Data Frames in this Zone shall be set to all (00).

DVD+RW:	**Annex M, Figure M.1**
DVD+RW HS, DVD+RW DL:	**Annex N, Figure N.1**
DVD+R and DVD+R DL:	**Annex P, Figure P.1**

Flowchart showing the use of Physical format information in ADIP

Text to be replaced:
- byte 16: (N)BCA descriptor

New text:
- byte 16: General Flag bits

Nov 2008